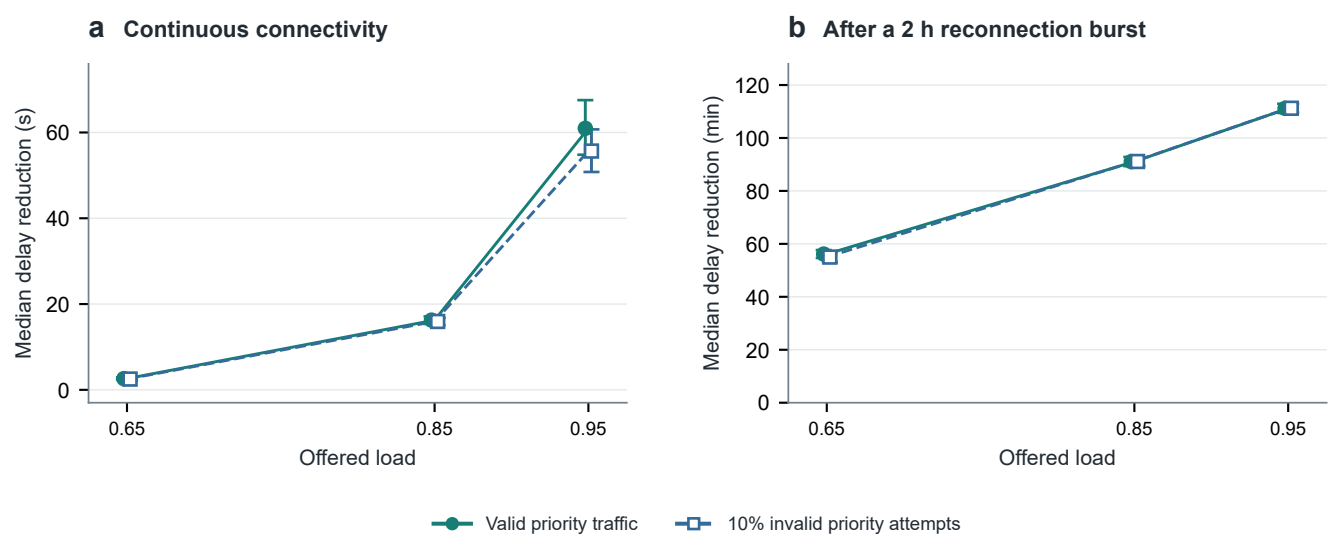
a Continuous connectivity
Median delay reduction (s)
0
20
40
60
0.65
0.85
0.95
Offered load
b After a 2 h reconnection burst
Median delay reduction (min)
0
20
40
60
80
100
120
0.65
0.85
0.95
Offered load
Valid priority traffic
10% invalid priority attempts