(a) Third A1 no-history checkpoint vs A0, A2, A3 and baselines - 20 paired disaster scenarios

CMAB, FMG, GBA, OCD, Random, Risk-Prior, SA, Static, A0 / 657111, A0 / 657112, A0 / 657113, A2 / 657131, A2 / 657132, A2 / 657133, A3 / 657141, A3 / 657142, A3 / 657143, A1 / 657121, A1 / 657122, A1 / 657123


Trailing 25-step means; no smoothing across the event

30% permanent node loss at step 1000 + cascading stress

Delivered service throughput (TPS)

Control step

(b) Late-window delivered service

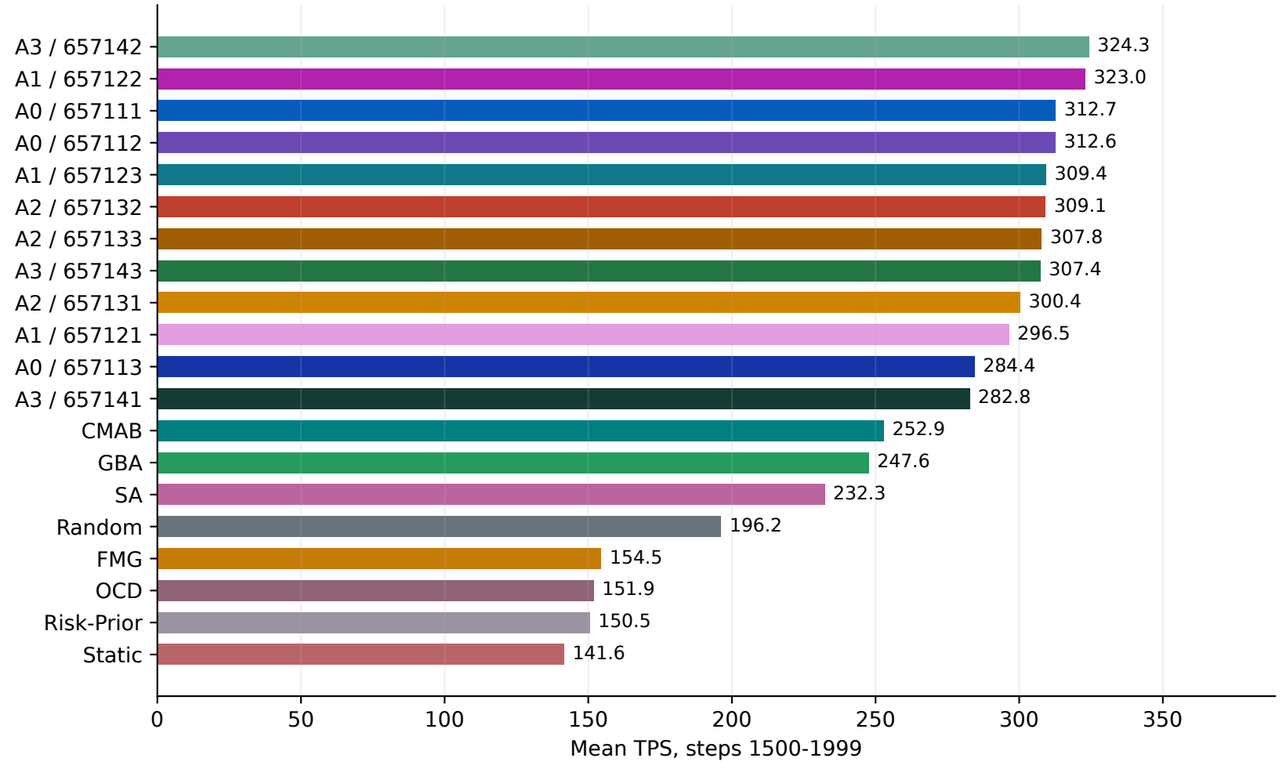

(c) Availability and actual-exposure guard (f = 6)

