
CCD receiver and physically inhibited bench transmitter — circuit review

DRAFT: subsystem only. No bus bias or termination. J1962 / power / MCU are on other design blocks.


RX: CCD+ > CCD− produces LOW. 47k input impedance; no clamp to a local positive rail.

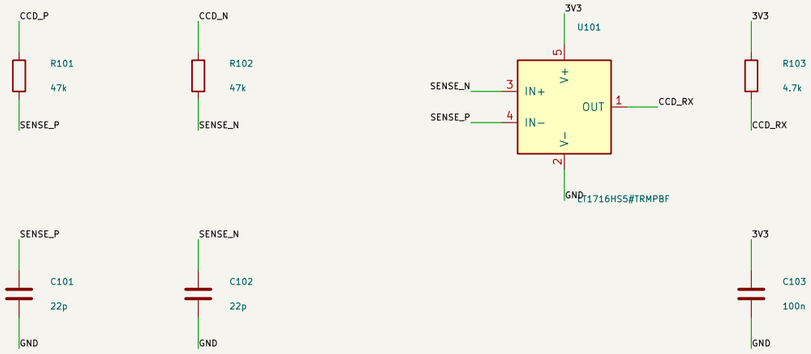


5V / 3V3 / GND are external supplies. CCD_P / CCD_N go to the protected vehicle connector block.

Vehicle transmission remains unauthorized. Synthetic model checks are not bench validation.



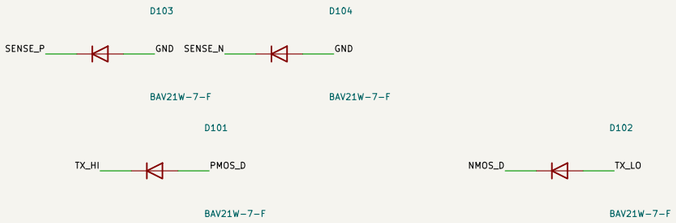

TX: active−high TX_DOM. JP101 absent disconnects the drive rail; both gates default OFF.

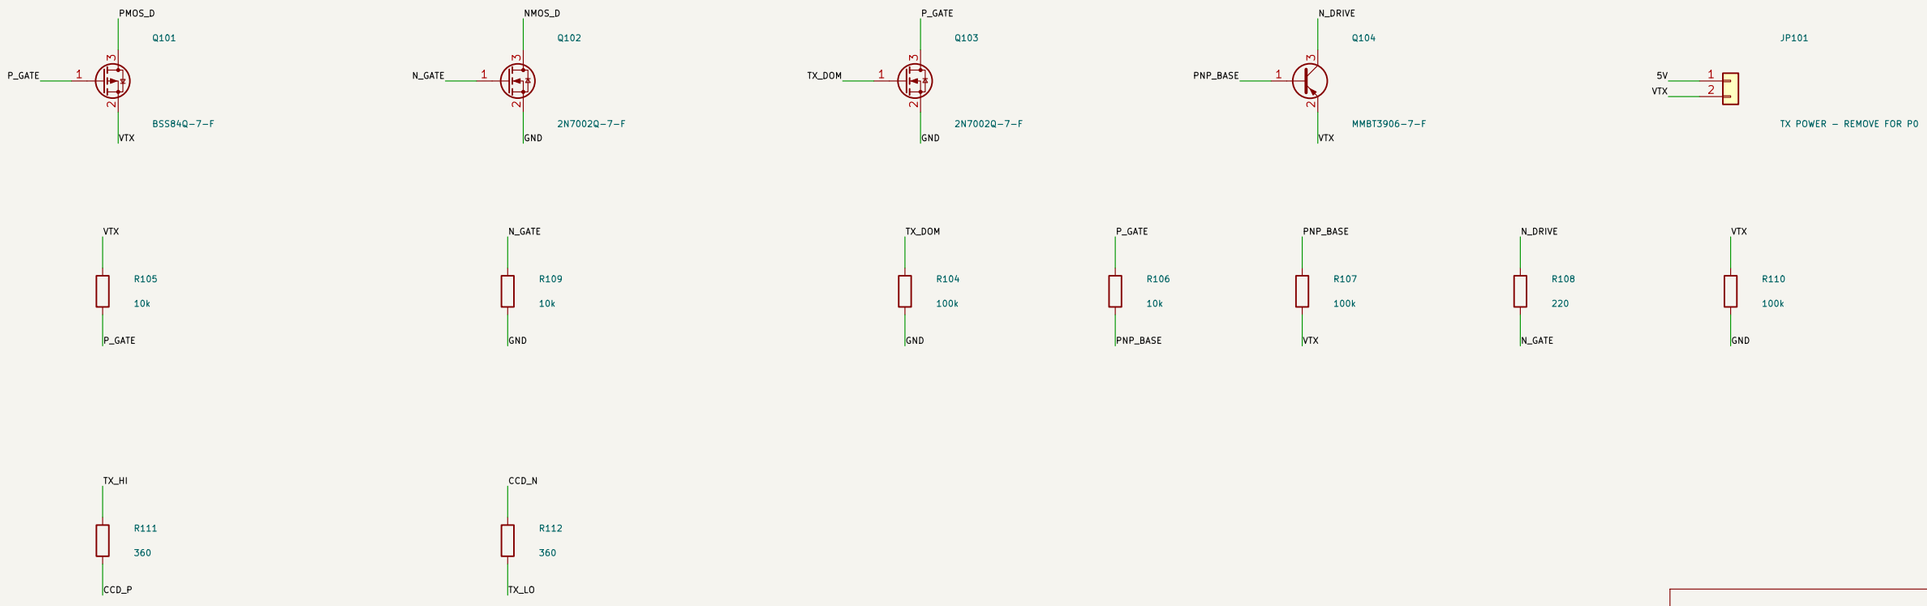

Sheet: /		
File: p0_frontend.kicad_sch		
Title:		
Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 1/1