


CONFIDENTIAL: THIS DRAWING AND THE INFORMATION THEREIN ARE THE PROPERTY OF GABRIEL INDIA LTD., AND SHALL NOT BE REPRODUCED, COPIED, RECORDED IN ANY MEDIA, USED FOR ANY OTHER PURPOSE OR DELIVERED AND/OR DISCLOSED TO ANY THIRD PARTY WITHOUT WRITTEN CONSENT OF GABRIEL.

FILE ARCHIVE LOCATION: \\gishr-prod1\d\backup\devprojects\honda\k23a\011\drawings&models\34040475-pistonrod.drw

TOL. OF LENGTH, DIA. AND POSITION	TABLE: GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED OF MACHINING									
	MEASUREMENT OVER 0.5 TO 6	OVER 6 TO 30	OVER 30 TO 120	OVER 120 TO 315	OVER 315 TO 1000					
TOLERANCE OF DRILL HOLE DIA.	TOLERANCE	±0.1	±0.2	±0.3	±0.5	±0.8				
	MEASUREMENT OVER 1 TO 3	OVER 3 TO 6	OVER 6 TO 30	OVER 30 TO 120	OVER 120 TO 315	OVER 315 TO 1000				
TOLERANCE OF DRILL HOLE DEPTH	TOLERANCE	±0.5	±0.7	±1.2	±2.0	±3.0				
	MEASUREMENT OVER 1 TO 3	OVER 3 TO 6	OVER 6 TO 30	OVER 30 TO 120	OVER 120 TO 315	OVER 315 TO 1000				
TOL. OF CHAMFER OF EDGE CORNER AND ROUNDNESS.	TOLERANCE	±0.3	±0.5	±0.7	±1.2	±2.0				
	MEASUREMENT OVER 1 TO 3	OVER 3 TO 6	OVER 6 TO 30	OVER 30 TO 120	OVER 120 TO 315	OVER 315 TO 1000				
TOL. OF ANGLE	TOLERANCE	±0.3	±0.5	±0.7	±1.2	±2.0				
	MEASUREMENT OVER 1 TO 3	OVER 3 TO 6	OVER 6 TO 30	OVER 30 TO 120	OVER 120 TO 315	OVER 315 TO 1000				


DETAIL "A"
(PROFILE AT MACHINING STAGE)

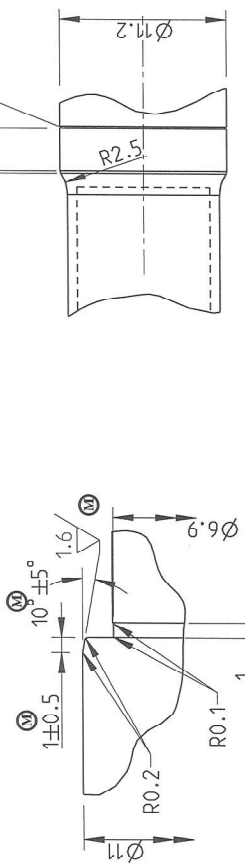

DETAIL "B"
(PROFILE AT MACHINING STAGE)



DETAIL "C"
(PROFILE AT MACHINING STAGE)

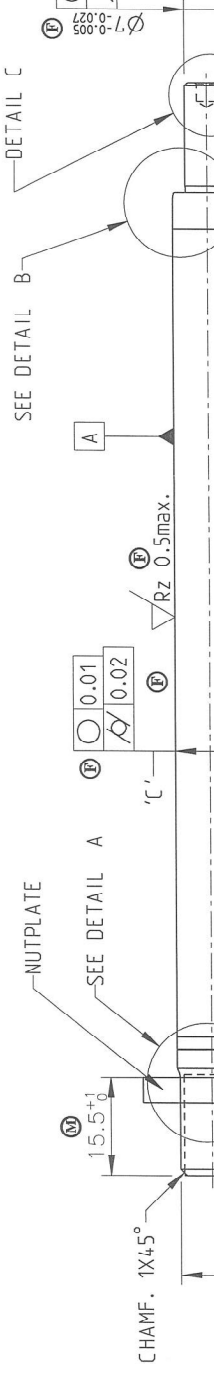

PART NO	FINISH GRIND Ø	Nickel Plating thk	CHROME PLATING THK. BEFORE POST CHROME GRINDING	CHROME PLATING THK. AFTER POST CHROME GRINDING	Ø 'C'	DIM A	DIM B	MODEL
34040498-1	Ø10.916~10.926	13 ±3 µm	15 ±3 µm	13 ±3 µm	Ø10.960 - 10.986	174.6	141	K23A
34040498-2						171.1	137.5	K14F

GABRIEL INDIA LTD.	
SCALE	SHEETS
1:1	1 / 1
DRAWN BY	DATE
D. Sankar	15/5/16
CHECKED BY	DATE
Vinodh	26/13
APPROVED BY	DATE
Signature	15/5/16
GENERAL TOLERANCE AS PER :-	
DESIGN SOURCE REF.	
RELEASE FOR	
PRODUCTION	
DO NOT SCALE	
IF IN DOUBT PLEASE ASK	
SIZE : A3	

- NOTES:-
1. REMOVE BURRS.
 2. UNLESS OTHERWISE SPECIFIED, TOLERANCE IN DIMENSIONS OF MACHINING AREA SHALL BE IN ACCORDANCE WITH TABLE 3.
 3. PLATING VALIDATION & SURFACE DEFECT QUALITY CHECK AS PER GSP0103.
 4. HARDNESS & TENSILE STRENGTH REQUIREMENT.
 5. POSITIVE TENSILE STRENGTH REQUIREMENT.
 6. MATERIAL TO BE DONE (3 STEPS).
 7. MATERIAL REMOVAL SHALL BE 3 TO 5µm ON DIAMETER.
 8. O.D. SHALL BE MAINTAINED AS Ø11-0.040/-0.014.
 9. CORROSION RESISTANCE : UPTO 32 HOURS SALT TEST, RATING 9 MIN.
 10. MUST BE NO CHATTER, SCRATCH, ABRASION AND BRUISE ON SURFACE OF Ø11.
 11. MUST BE FREE FROM PIN HOLE, ROUGH SURFACE, AND BLISTER AFTER PLATING.

