
INPUT PROTECTION + FILTER
DLC +12V is switched by the ignition key
Fuse 1A (automotive blade) in the +12V wire before J1

K-LINE TRANSCEIVER (pinout checked: ST DS1765 Rev 7)
L9637D: TX/RX non-inverting (firmware: no TX inversion)
VCC = 3.3V from ESP32: logic matches GPIO, no level shifter
JP1: bridge LI to VS (L-line unused, keeps LO high / low quiescent)

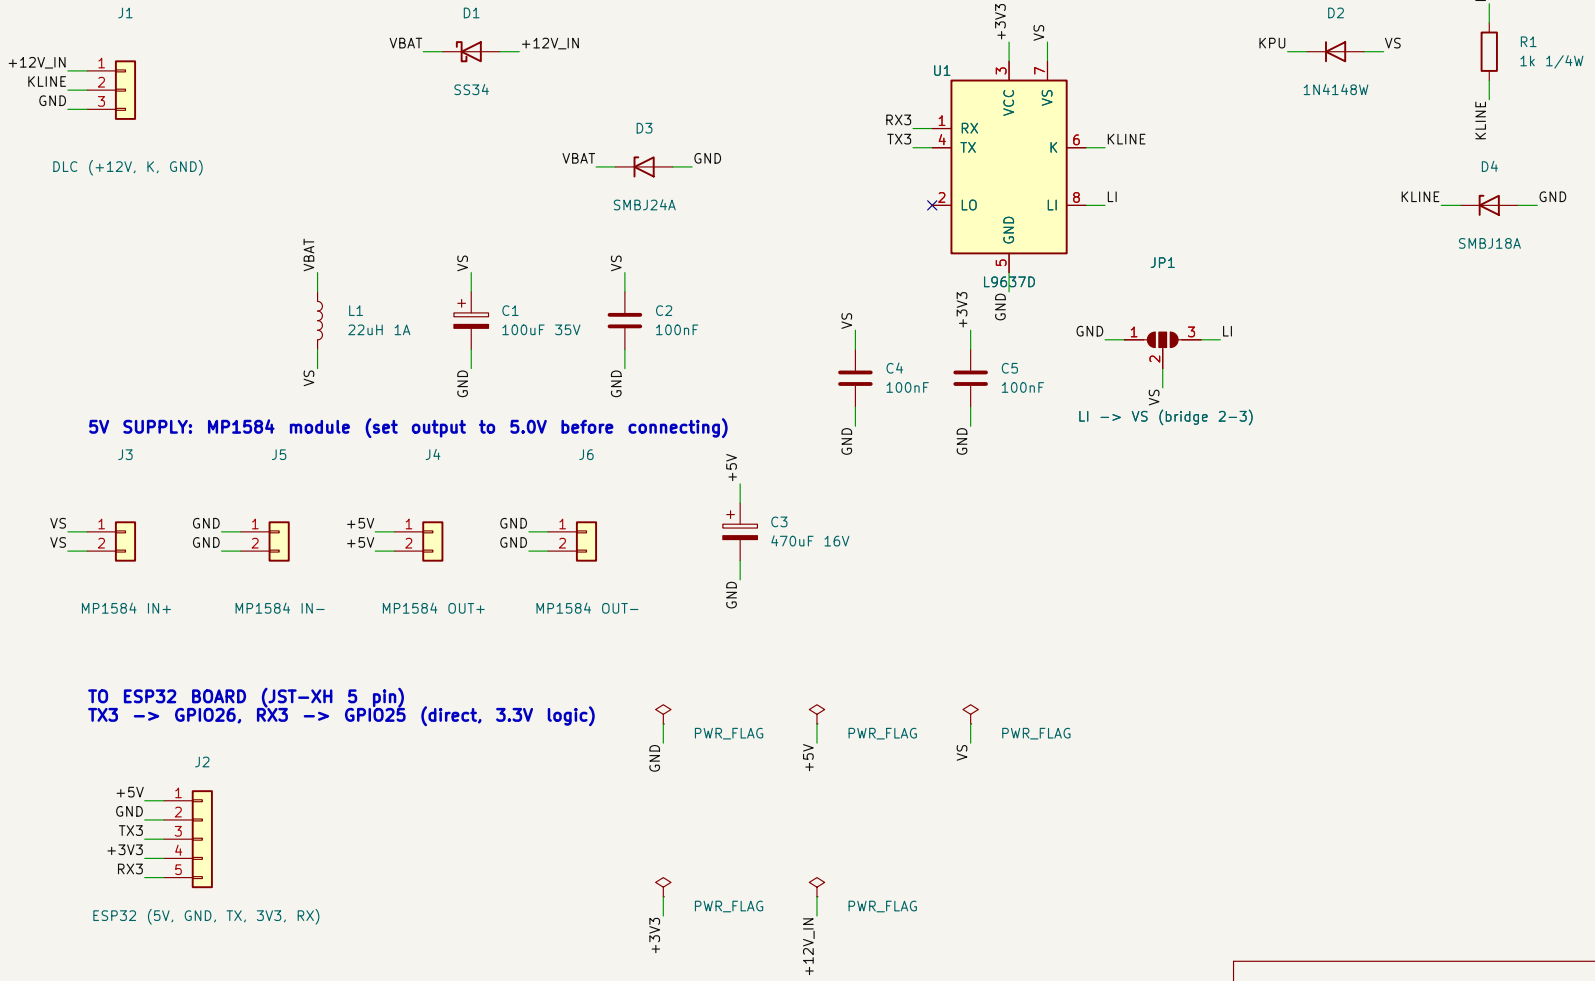

Sheet: /		
File: kline_l9637d.kicad_sch		
Title: K-Line interface (L9637D) – Air Blade 125 DLC reader		
Size: A4	Date: 2026-10-24	**Rev: 1**
KiCad E.D.A. 10.0.3		Id: 1/1