SPECIFICATION FOR APPROVAL

承认书

CUSTOMER	NUMBER
客户名称:	编 号:
DESCRIPTION	QUANTITY
品 名: 贴片共模滤波器	数 量:
PART NO.	DATE
型 号: TLCM7660-2-301T01	日 期:
CUSTOMER PART NO.	NOTE
客户料号:	注 解:

APPROVAL SIGNATURE 客户承认签章

APPROVED BY	Q. C. DEPT.	CHECKED BY	DRAWN BY
核准	品 管	核 查	制作

深圳市宝创达电子有限公司

SHENZHEN BAOCHUANGDA ELECTRONICS CO., LTD.

地址: 深圳市宝安区观澜镇人民路221号富康工业区A2栋3楼 Add: Shenzhen Baoan District Guanlan Town People's Road No. 221 Fu Kang Industrial Area A2 building 3 flo

Tel: 0755-29736760 Fax: 0755-28056434

Http:// www.bcdcn.com

DC COMMON MODE FILTER

FEATURES

- A chip-type common mode filter for large current applications. Common mode impedance surpasses $700\,\Omega$ at 100MHz. Noise is greatly suppressed.
- *Capable of handling the highest current(up to 8A) of any chiptype common mode filter.
- 'Height and size have been considered, resulting in a compact and light-weight choke coil. Applicable for the miniaturization required to reduce the size and weight of portable equipment.
- *The products contain no lead and also support lead-free soldering.
- *The product does not contain regulatde substances that are slated to be included in ROHS.



APPLICATIONS

Used for power line noise suppression for any electonic-devices Used to counter adapter/battery line noise for relatively large electronic devices such as notebook PCs, stand-alone word processors, etc

TEMPERATURE RANGES

Operating	—40to+125℃
Storage(After mount)	—40to+125°C

Part Number System

<u>TLCM</u>	<u>7660</u>	<u>-2</u>	<u>-301</u>	<u>T</u>	<u>01</u>
1	2	3	4	(5)	6

- ① Type:TLCM
- ② External Dimensions (L×W) (mm):7.6*6.0
- ③ Number of Lines: 2
 ④ Impedance:301=300 Ω
 ⑤ Packing:Tape & Reel
- 6 Management Symbol:01


ELECTRICAL CHARACTERISTICS

Part No.	lmpedance (Ω)min[at 100MHz]			Insulation resistance $(M\Omega)$ max
TLCM7660-2-301T01	300	28	3.5	10

DC COMMON MODE FILTER

TYPICAL ELECTRICAL CHARACTERISTICS IMPEDANCE vs. FREQUENCY CHARACTERISTICS


TLCM7660-2-301T01

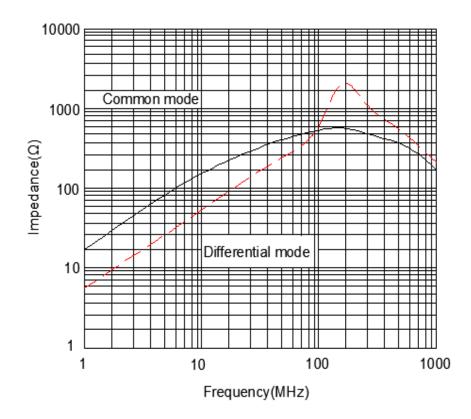


DC COMMON MODE FILTER

SHAPES AND DIMENSIONS/CIRCUIT DIAGRAM/RECOMMENDED PC BOARD PATTERN (REFLOW SOLDERING)

◆ Dimensions (mm)





UNIT: mm

 $A:7.6 \pm 0.5$


 $B{:}6.0{\pm}~0.5$

C:4.3 (MAX)


D:2.60 E:2.50

F:2.10 G:1.80

◆ Land Pattern(mm)




◆Schematics(Bottom)




DC COMMON MODE FILTER

Recommended Reflow Temperature Curve

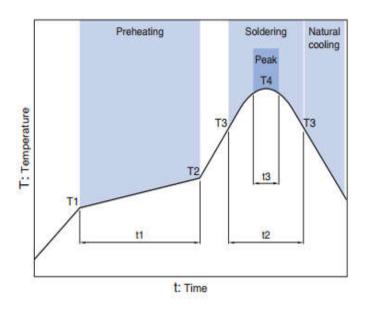

Preheati	ng		Solderin	g	Peak	
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	ti	T3	12	T4	t3
150°C	180°C	60 to 120s	230°C	10 to 30s	245°C	5s

Package size (mm)

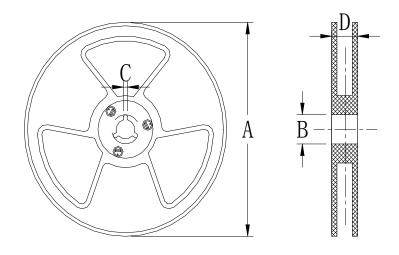

Specs	13"	7"	
A	Ф330±2.0	Ф178±2.0	
В	$\Phi 90 \pm 2.0$		
С	2.3		
D	21.5		