


产品规格书						
Products Specifcation						
Products Name:12KG Digital servo motor						
1.使用条件 Apply Environmental Conditon						
No	Item			Specifcation		
1.1	储 存 温 度 Storage Temperature Range			-30℃～80℃		
1.2	运 行 温 度 Operating Temperature Range			-25℃～70℃		
2.测试环境 Standard Test Environment						
No	Item			Specifcation		
2.1	温度 Temperature Range			-25℃～70℃		
2.2	湿度 Humidity Range			65%±10%		
3. 机械特性 Mechanical Specification						
No	Item			Specifcation		
3.1	舵机尺寸 Size			40.8*20.2*28.7mm		
3.2	重量 Weight			60g±5%		
3.2	齿轮类型 Gear type			6 Metal		
3.4	机构极限角度 Limit angle			360°		
3.5	轴承 Bearing			2BB		
3.6	出力轴 Horn gear spline			25T 直径:5.9mm		
3.7	摆臂 Horn type			Plastic, POM		
3.8	外壳 Case			Engineering plastics(PBT)+Aluminum alloy		
3.9	舵机线 Connector wire			300mm±5mm		
3.10	马达 Motor			Carbon brush motor		
3.11	防水性能 Splash water resistance			IP65		
4.电气特性 Electrical Specification						
No	Item			Specifcation		
4.1	工作电压 Operat voltage			4.8V	6.0V	7.2V 8.4V
4.2	静态电流 Idle current			< 40mA		
4.3	空载转速 No load speed			0.10sec/60°	0.09sec/60°	0.08sec/60° 0.07sec/60°
4.4	空载电流 Runnig current			210mA	260mA	350mA 450mA
4.5	堵转扭矩 Peak stall torque			12kg.cm	14.5kg.cm	15.5kg.cm 16.5kg.cm
4.6	堵转电流 Stall current			2700mA±10%	3200mA±10%	3900mA±10% 4300mA±10%
5.控制特性 Control Specification						
No	Item			Specifcation		
5.1	控制信号 Command signal			Pulse width modification		

5.2	放大器类型 Amplifier type	Digital controller
5.3	脉冲宽度范围 Pulse width range	500~2500usec
5.4	中点位置 Neutral position	1500usec
5.5	旋转角度 Running degree	180°±3°(when 500~2500usec)
5.6	死区宽度 Dead band width	3 usec
5.7	旋转方向 Rotating direction	Counterclockwise (when 1000~2000usec)

二、2D 尺寸图

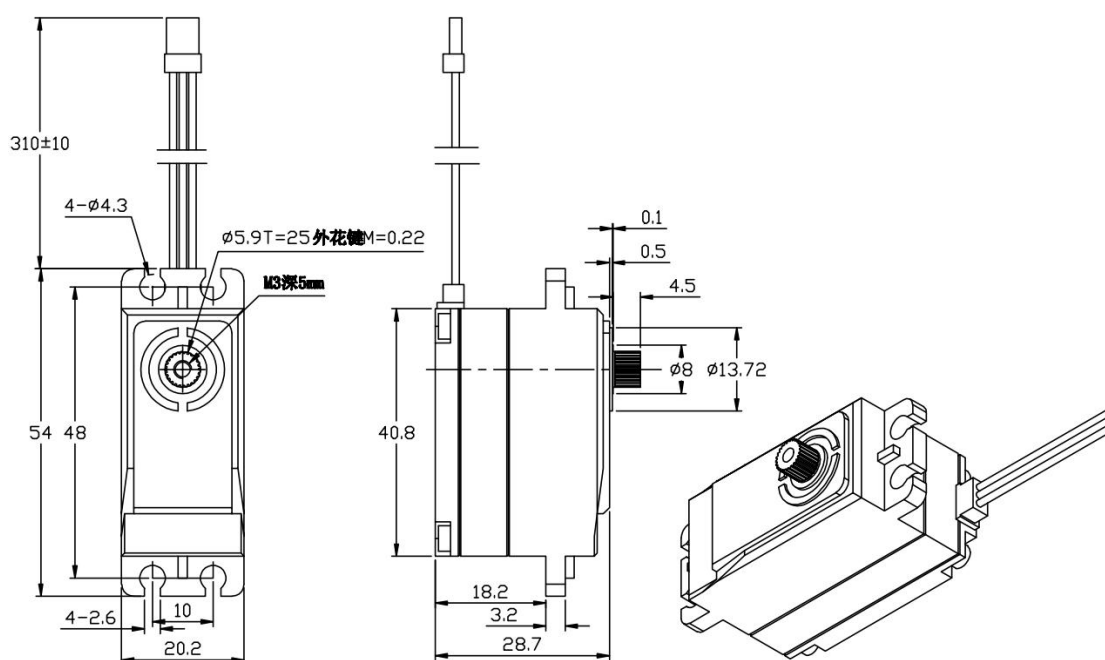

注：本产尺寸图与实际产品尺寸参在 ± 0.2 mm 误差。