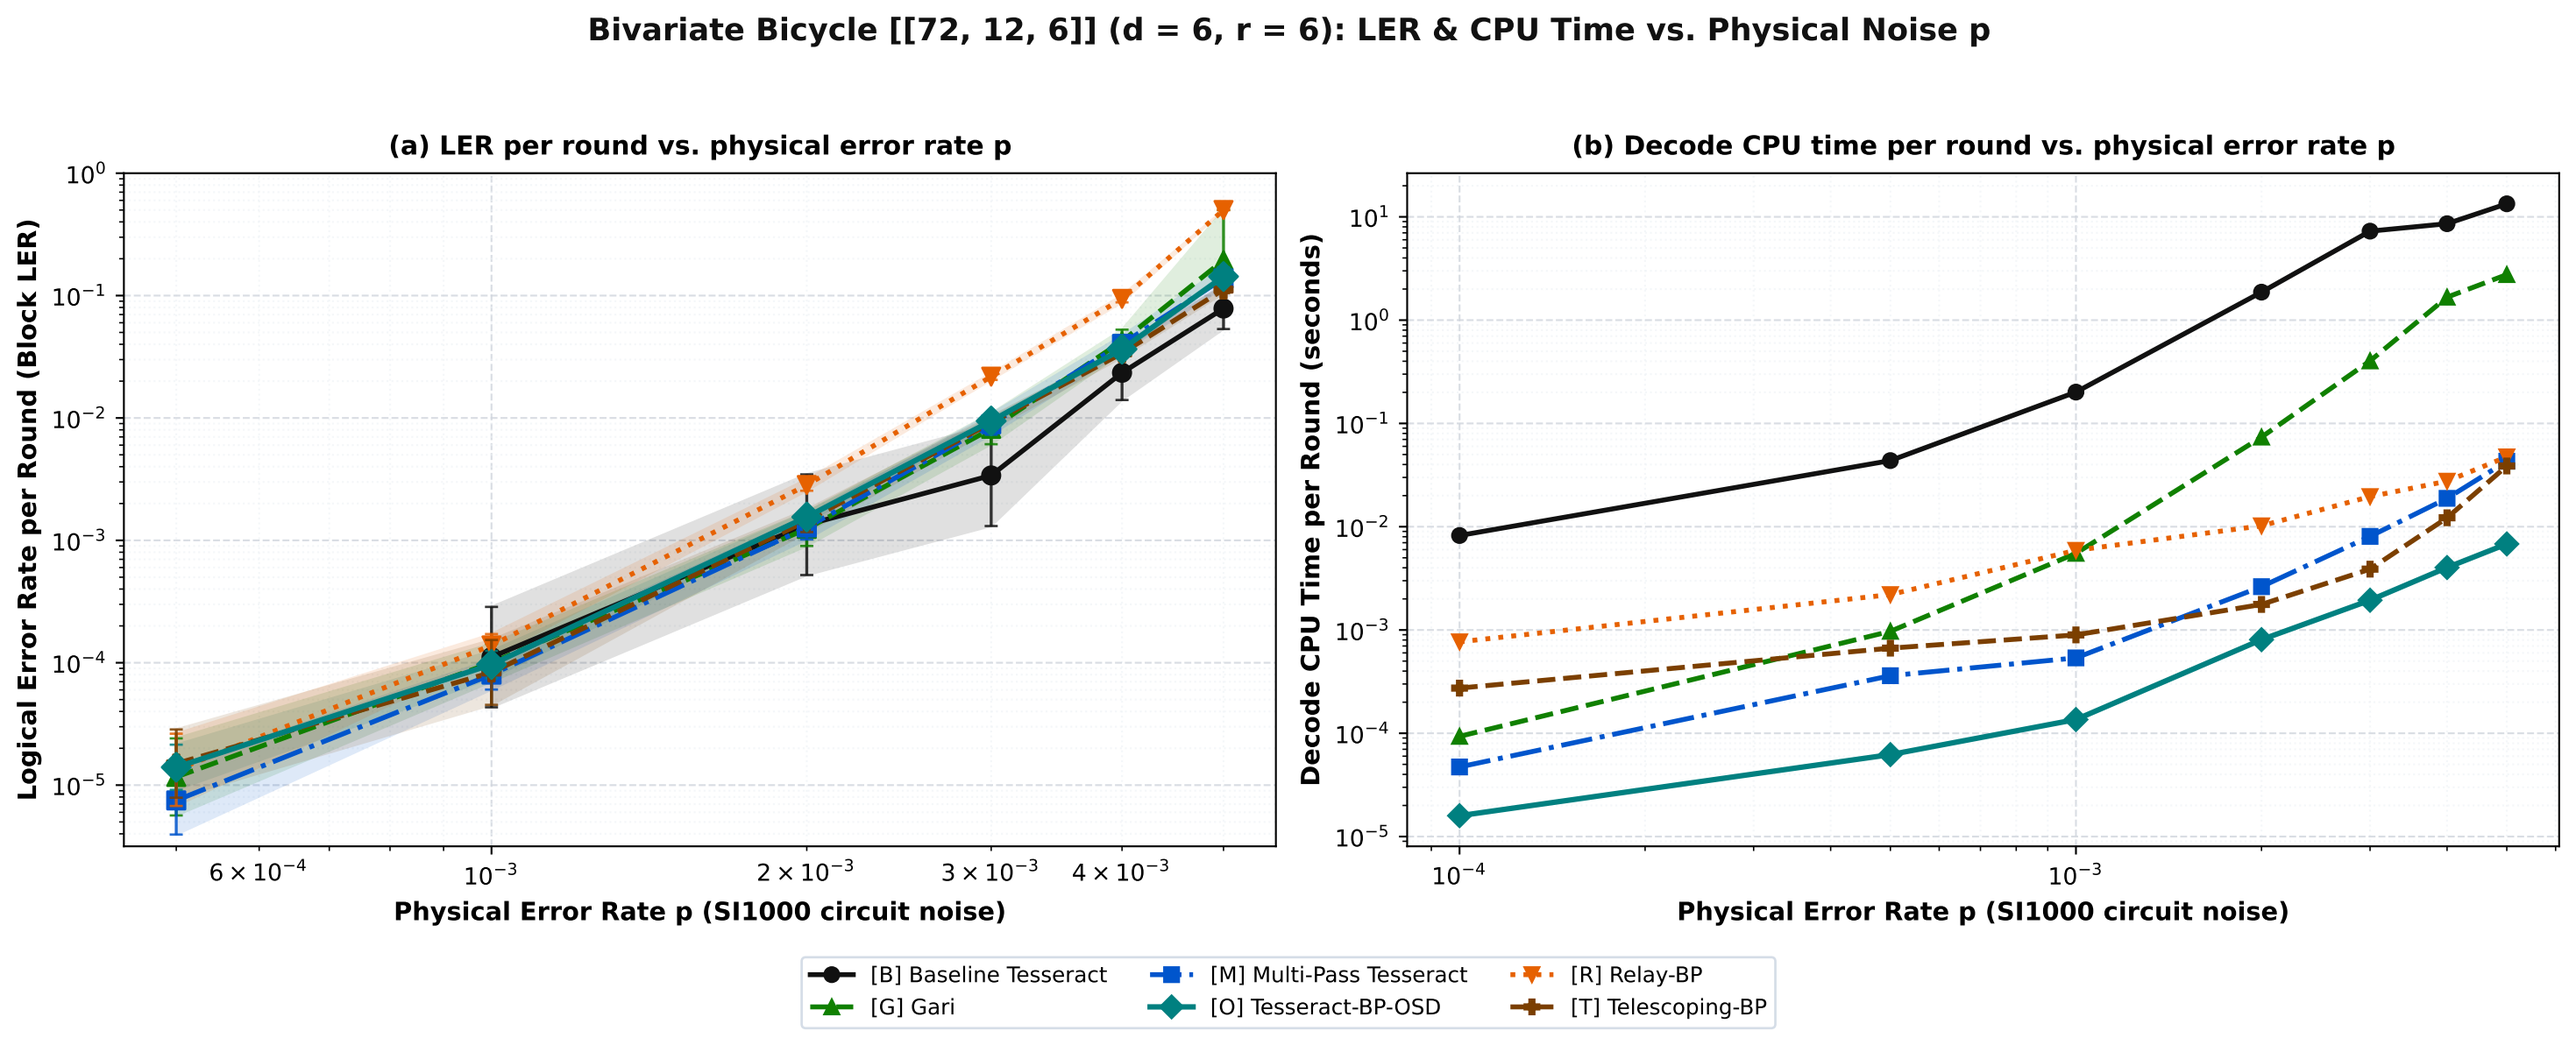
Bivariate Bicycle [[72, 12, 6]] (d = 6, r = 6): LER & CPU Time vs. Physical Noise p
(a) LER per round vs. physical error rate p
Logical Error Rate per Round (Block LER)
Physical Error Rate p (SI1000 circuit noise)
(b) Decode CPU time per round vs. physical error rate p
Decode CPU Time per Round (seconds)
Physical Error Rate p (SI1000 circuit noise)
[B] Baseline Tesseract
[G] Gari
[M] Multi-Pass Tesseract
[O] Tesseract-BP-OSD
[R] Relay-BP
[T] Telescoping-BP