

REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
A	030CT2019	RES	INITIAL RELEASE

SOUTHCO PERFORMANCE GUIDELINES:


THE PERFORMANCE GUIDELINES SHOWN ON THIS PAGE ARE SUPPLIED AS A GENERAL GUIDE ONLY, AS CONDITIONS VARY WITH EACH APPLICATION AND METHOD OF INSTALLATION, STRENGTH DATA GIVEN IS FOR FAILURE OF THE PRODUCT OR FOR SUFFICIENT DEFORMATION TO MAKE THE PRODUCT INOPERABLE. NO SAFETY FACTOR HAS BEEN APPLIED IT IS RECOMMENDED THAT THE USER REQUEST A PRODUCT SAMPLE FOR TESTING TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE PURPOSE INTENDED AND USER'S PARTICULAR APPLICATION.

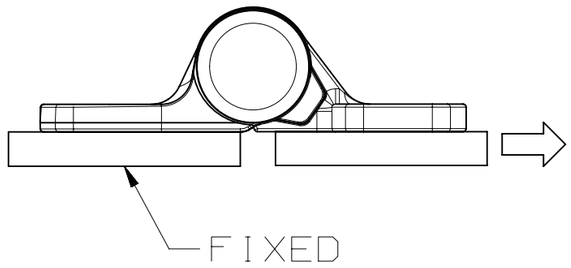

RADIAL INLINE

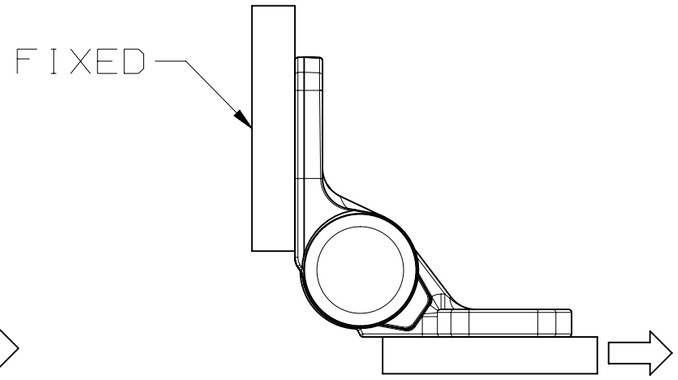

RADIAL PERPENDICULAR

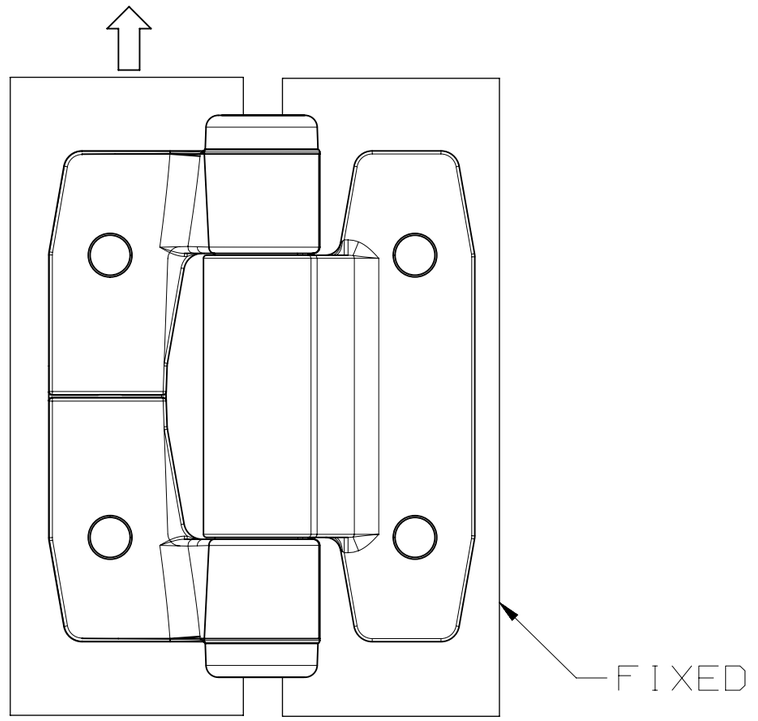

AXIAL

PART NUMBER	AVERAGE ULTIMATE RADIAL LOAD N (lbf)		AVERAGE ULTIMATE AXIAL LOAD N (lbf)	CYCLE LIFE	MAXIMUM STATIC WORKING LOAD N (lbf)	
	INLINE	PERPENDICULAR			AXIAL	RADIAL
E6-10-6XXXD0-50	10000 (2200)	3500 (780)	6000 (1300)	20000	500 (110)	2000 (450)

CYCLE LIFE NOTES:

A. HINGE AXIS ORIENTED HORIZONTALLY

B. HINGE ROTATED 180° FROM CLOSED TO OPEN AND BACK

C. TORQUE REMAINS WITHIN 20% OF NOMINAL VALUE

D. TEMPERATURE PROFILE:
25% OF CYCLES AT -20°C
50% OF CYCLES AT ROOM TEMPERATURE
25% OF CYCLES AT 65°C

REF: trE6-39260

CPB NUMBER 2017-1180

PROPRIETARY ITEM

EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.

THIRD ANGLE PROJECTION

MILLIMETERS [IN]

TOLERANCES UNLESS OTHERWISE NOTED

PER ASME Y14.5M-1994

southco®
CONNECT·CREATE·INNOVATE

DESCRIPTION: HINGE & CONTROLLED MOTION DEVICE ONE WAY HINGE ASSEMBLIES

SIZE	SYSTEM	DWG NO.
A3	NX	TD-E6-10-6-0-J

DRAWN BY	DATE	SCALE	SHEET
RES	030CT2019	1:1	1 OF 1