



REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
D	12AUG2021	OAP/DMS	PRN: P2021-1614

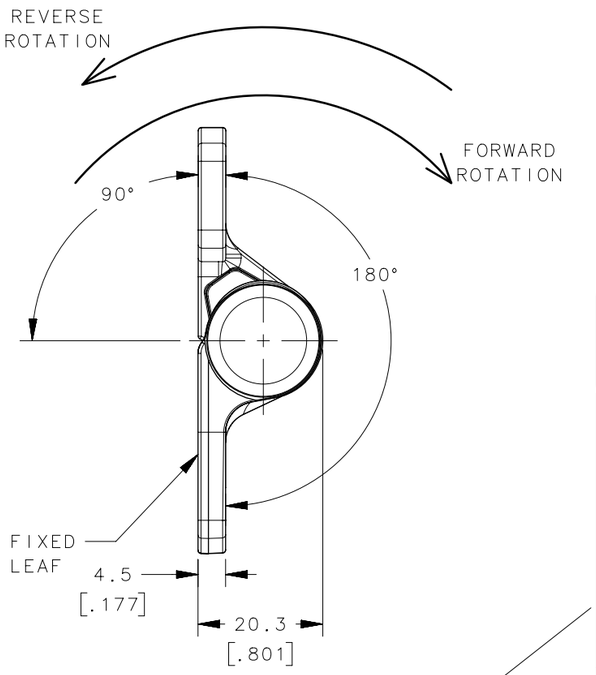


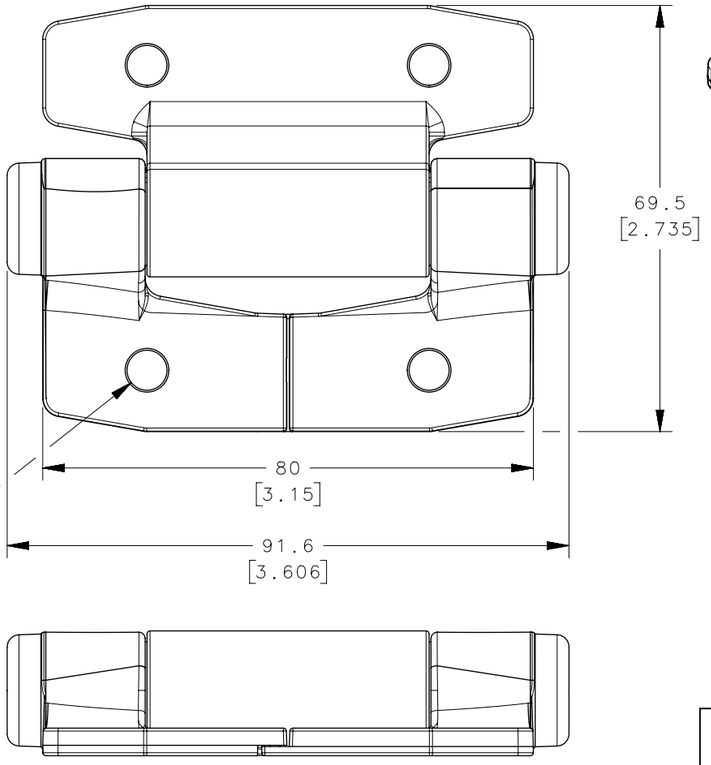

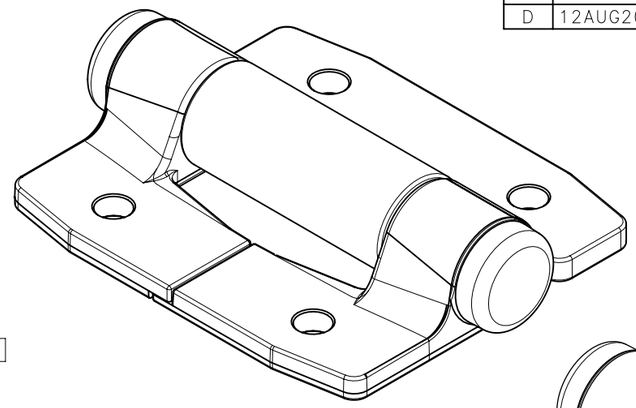

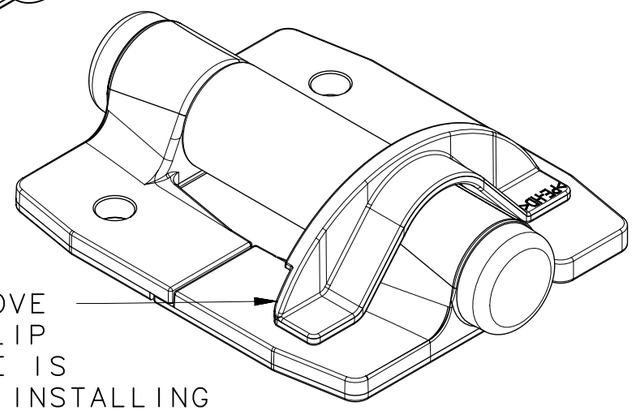

DO NOT REMOVE SHIPPING CLIP UNTIL HINGE IS SECURED BY INSTALLING FIRST PAIR OF SCREWS; DISCARD CLIP WHEN REMOVED

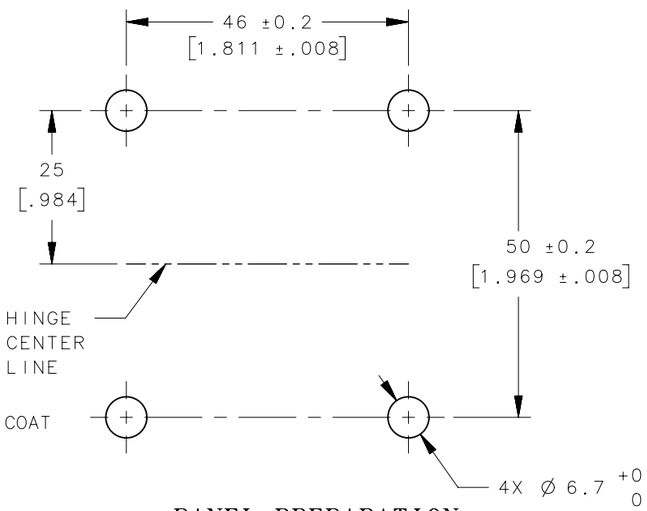

PANEL PREPARATION

NOTES:

A. USE M6 MOUNTING HARDWARE

B. VISIBLE SURFACES WHEN INSTALLED TO MEET CLASS B REQUIREMENTS OF SOUTHCO COSMETIC STANDARD S-121

C. MATERIAL AND FINISH:
HOUSING AND LEAVES: ALUMINUM ALLOY, POWDER COAT
SHAFT, TORQUE ELEMENTS, COILED SPRING PIN, CLUTCH HOUSING, ROLLERS - STEEL
WASHERS, CLUTCH SPRINGS - STAINLESS STEEL
O-RINGS - BUNA-N RUBBER
BEARINGS - BRASS
BUSHINGS - DIE CAST ZINC, POWDER COAT
SHIPPING CLIP - UHMW POLYETHYLENE
THIS PRODUCT IS RoHS COMPLIANT

D. TORQUE IN FREE DIRECTION IS 0.5 Nm MAXIMUM

SOUTHCO PART NUMBER	FORWARD TORQUE	REVERSE TORQUE
E6-10-620F0-Z	2.3±0.46 Nm (20±4 in-lb)	FREE
E6-10-635F0-Z	3.9±0.78 Nm (35±7 in-lb)	FREE
E6-10-650F0-Z	5.7±1.1 Nm (50±10 in-lb)	FREE
E6-10-665F0-Z	7.3±1.4 Nm (65±13 in-lb)	FREE
E6-10-680F0-Z	9±1.8 Nm (80±16 in-lb)	FREE
E6-10-695F0-Z	10.7±2.1 Nm (95±19 in-lb)	FREE
E6-10-6110F0-Z	12.4±2.5 Nm (110±22 in-lb)	FREE
E6-10-620R0-Z	FREE	2.3±0.46 Nm (20±4 in-lb)
E6-10-635R0-Z	FREE	3.9±0.78 Nm (35±7 in-lb)
E6-10-650R0-Z	FREE	5.7±1.1 Nm (50±10 in-lb)
E6-10-665R0-Z	FREE	7.3±1.4 Nm (65±13 in-lb)
E6-10-680R0-Z	FREE	9±1.8 Nm (80±16 in-lb)
E6-10-695R0-Z	FREE	10.7±2.1 Nm (95±19 in-lb)
E6-10-6110R0-Z	FREE	12.4±2.5 Nm (110±22 in-lb)

Z DESIGNATES FINISH:
Z = 50: BLACK POWDER COAT
Z = 76; WHITE POWDER COAT

CPB NUMBER 2017-1180

THIRD ANGLE PROJECTION

MILLIMETERS [IN]

TOLERANCES UNLESS OTHERWISE NOTED

ALL DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY.

PER ASME Y14.5M-1994

PROPRIETARY ITEM
EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.

southco®
CONNECT·CREATE·INNOVATE

DESCRIPTION
HINGE & CONTROLLED MOTION DEVICE
ONE WAY FRICTION HINGE

SIZE	SYSTEM	DWG NO.
A3	NX	J-E6-10-6-0

DRAWN BY	DATE	SCALE	SHEET
RES	31JAN2019	1:1	1 OF 1