




USB-C

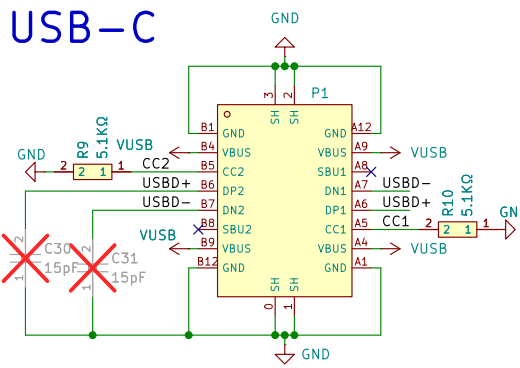


ESD

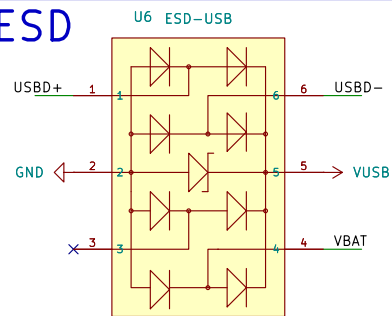


micro-SD

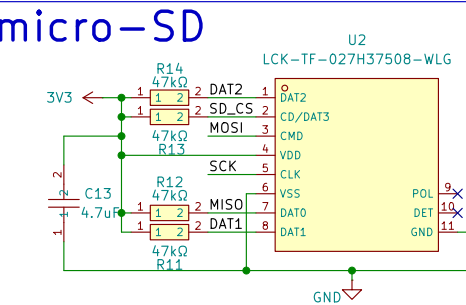


Power

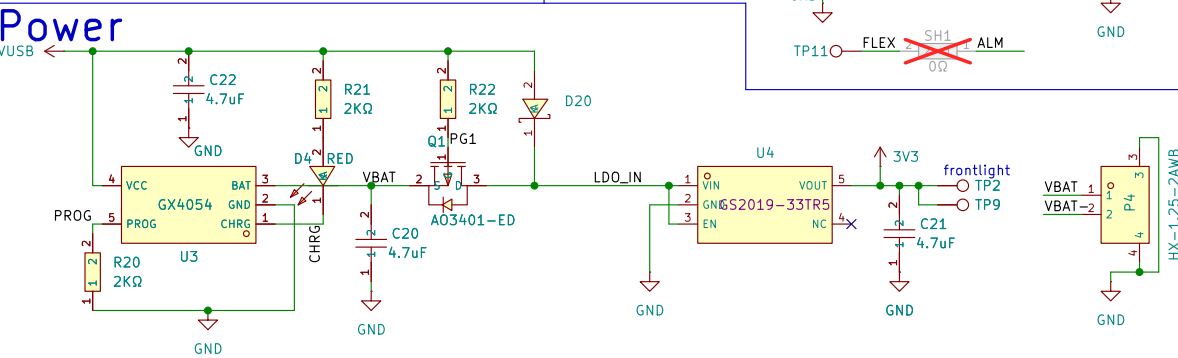


ESP32-C3 MINI

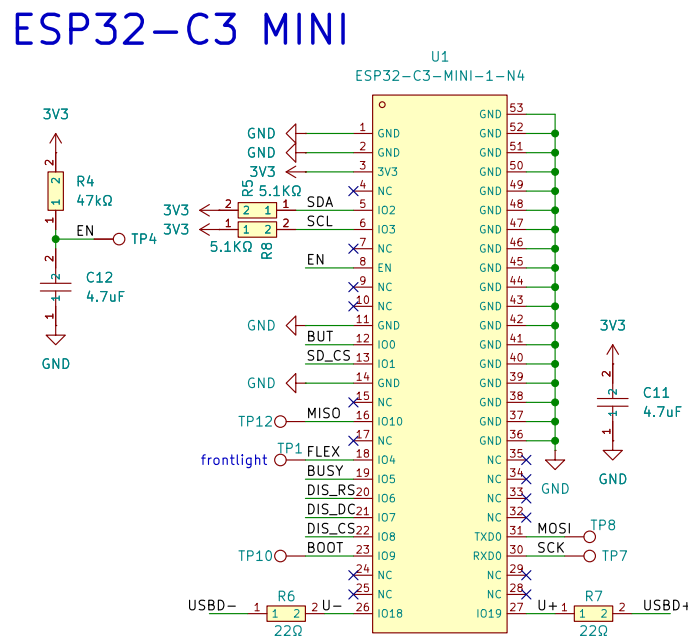

Fuel Gauge

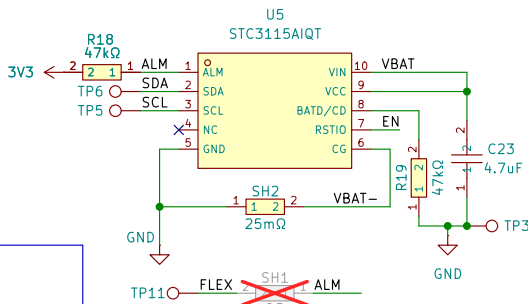


Buttons

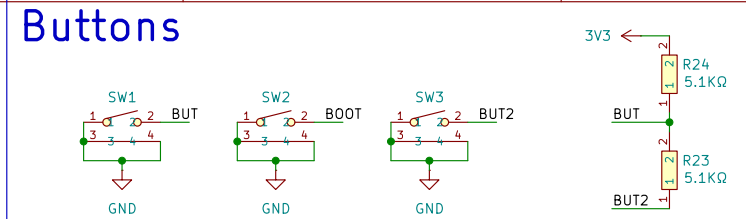

- Arguments for pin assignments:
- 1. GPIO0 & GPIO1 cannot have int. pull-ups
- 2. GPIO2 must be high at boot (ext. pulled up)
- 3. GPIO8 must be high at boot (ext. pulled up)
- 4. EN must be high at boot (ext. pulled up)
- 5. GPIO9 must be high at boot (int. pulled up)
- 6. we need 13 pin functions:
 - 5x GPI
 - 2x I2C (need ext. pullup)
 - 3x display I/O (busy act. H, rs act. L, D/C)
 - 1x user button (2x1 analog multiplex)
 - 1x boot button (GPIO9)
 - 1x FLEX (frontlight, alarm, ...)

E-ink 24-pin FPC

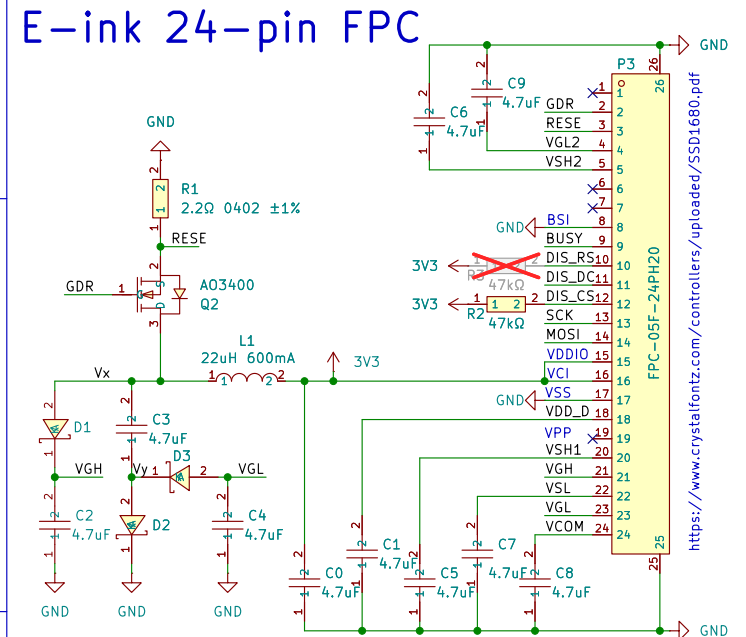

Drawn by: Quinten Luyten

Luyten Prototyping

Sheet: /

File: Pocket 2.66.kicad_sch

Title: Pocket 2.13 / 2.66 Mainboard

Size: A4	Date: 2026-05-12
----------	------------------

Size: A4	
KiCad E.D.A. 10.0.3	

Rev: 1.0

Id: 1/1