



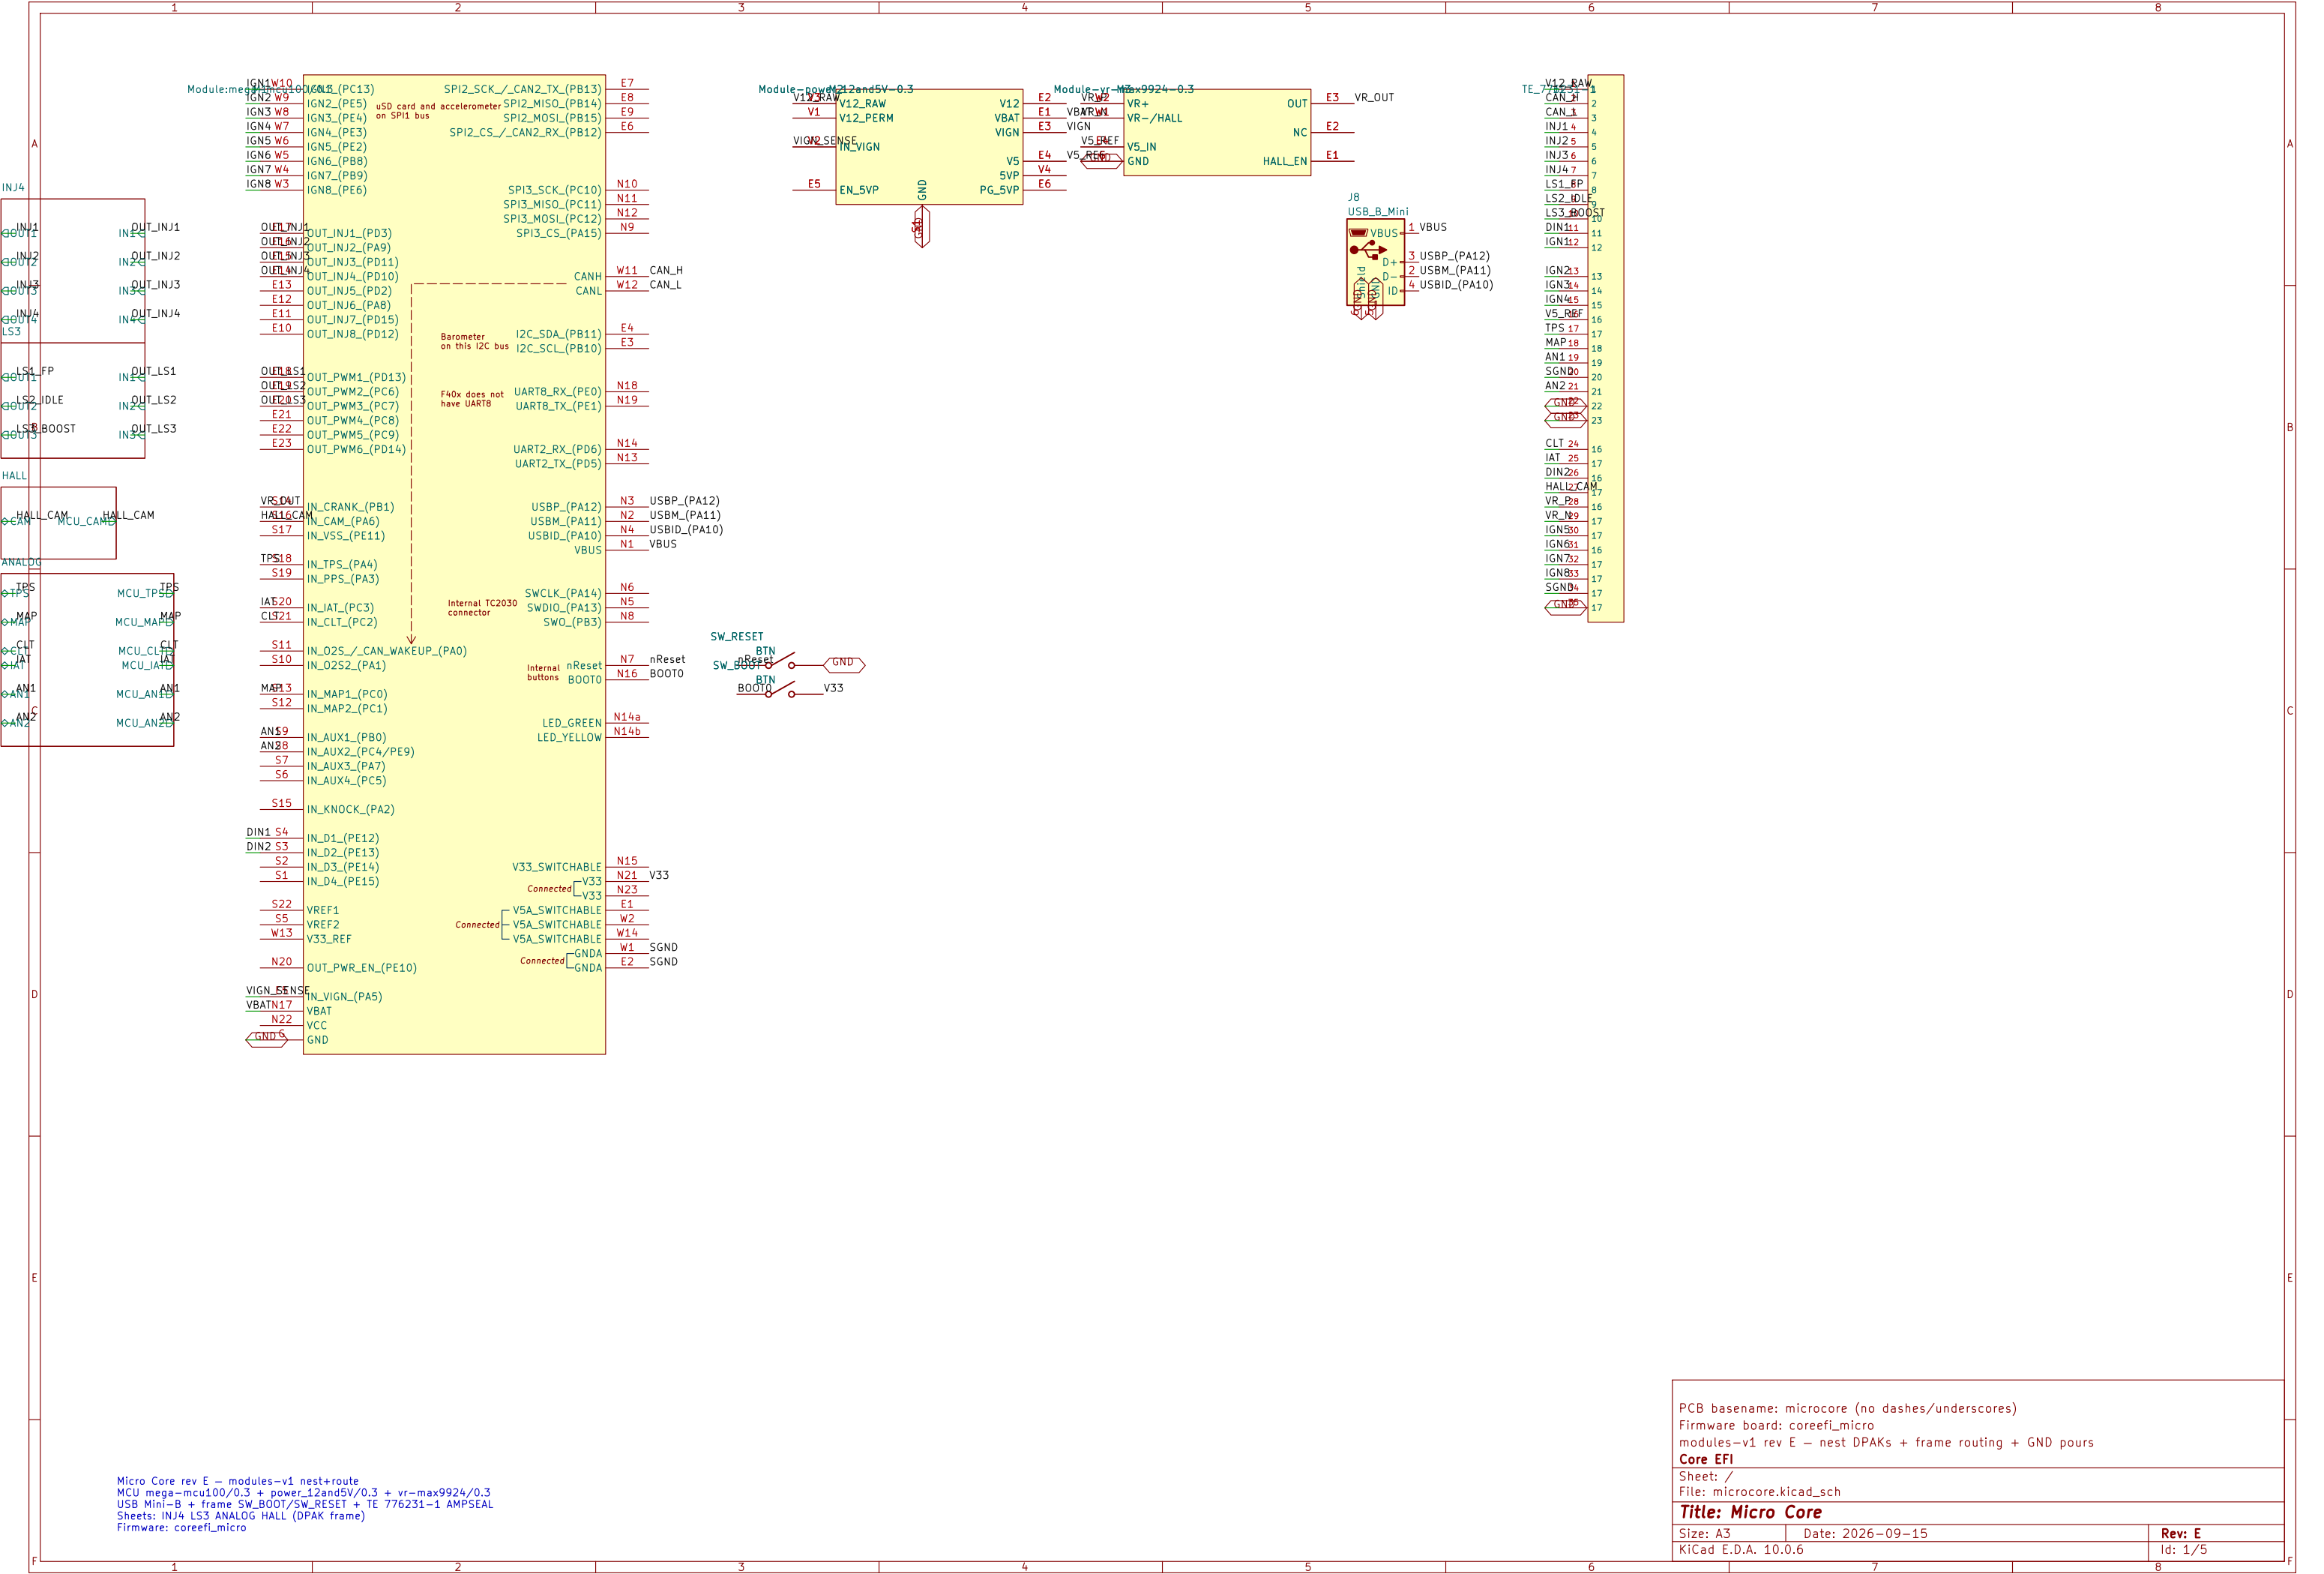

INJ4 Injectors
DPAK N-FET drivers (atphax LS style)
12 ohm gate, flyback/TVS TBD next pass
SPEC: SMBJ33A + UF flyback + 2x12 ohm high-Z

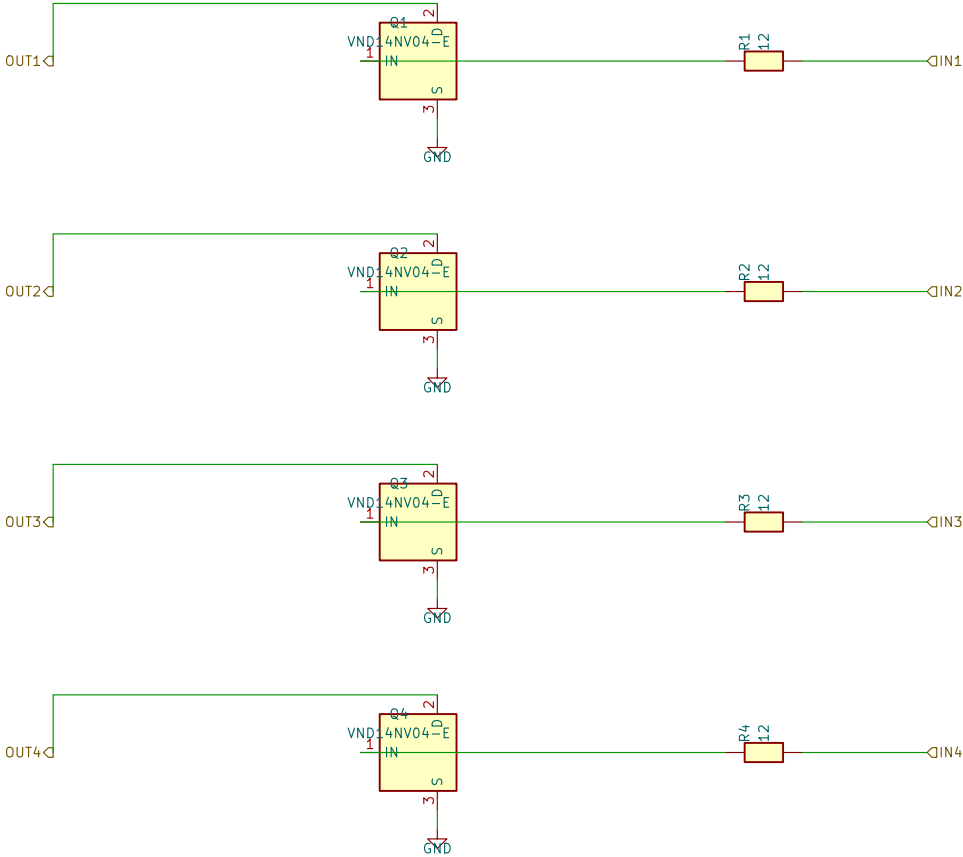

Core EFI

Sheet: /INJ4/
File: INJ4.kicad_sch

Title: INJ4 Injectors


Size: A4 Date: 2026-09-13

KiCad E.D.A. 10.0.6

Rev: B

Id: 2/5

LS3 Low-side
DPAK-N-FET drivers (atphax LS style)
12 ohm gate; flyback/TVS TBD next pass
SPEC: SMBJ33A + UF flyback + 2x12 ohm high-Z

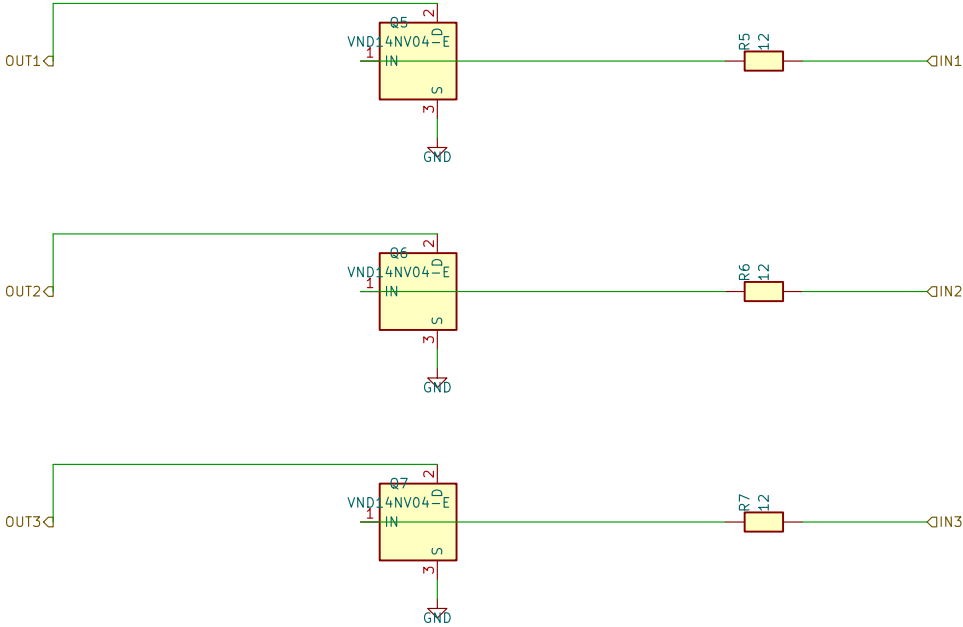

Core EFI

Sheet: /LS3/
File: LS3.kicad_sch

Title: LS3 Low-side

Size: A4 Date: 2026-09-13

KiCad E.D.A. 10.0.6

Rev: B

Id: 3/5

ANALOG input conditioning stub
Pull-ups / dividers / ESD TBD – passthrough hierarchy for pin map

The diagram shows a grid of connections between MCU pins and analog input pins. The MCU pins are labeled on the right: MCU_TPS, MCU_MAP, MCU_CLT, MCU_IAT, MCU_AN1, and MCU_AN2. The analog input pins are labeled on the left: TPS, MAP, CLT, IAT, AN1, and AN2. Each pair of pins is connected by a horizontal green line. The connections are as follows:

- MCU_TPS is connected to TPS.
- MCU_MAP is connected to MAP.
- MCU_CLT is connected to CLT.
- MCU_IAT is connected to IAT.
- MCU_AN1 is connected to AN1.
- MCU_AN2 is connected to AN2.

Core EFI	
Sheet: /ANALOG/ File: ANALOG.kicad_sch	
Title: ANALOG	
Size: A4	Date: 2026-09-13
KiCad E.D.A. 10.0.6	Rev: B Id: 4/5

