
Craig Smith | May 5, 2022

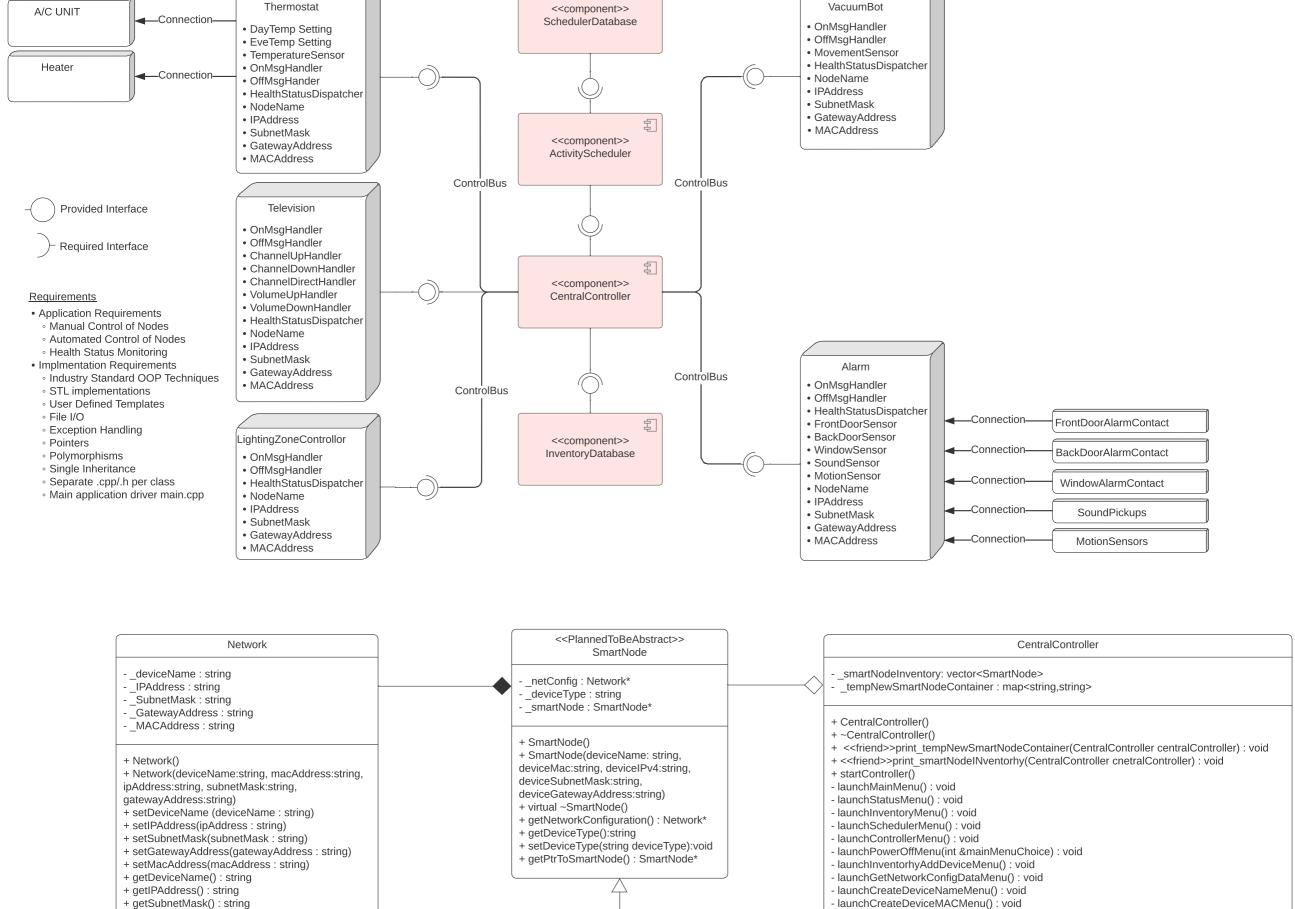

InputValidators

+ getGatewayAddress() : string

+ getMacAddress() : string

- + attribute1:type = defaultValue

 - attribute3:type
- + operation1(params):returnType

deviceGatewayAddress) + virtual ~Thermostat()

deviceSubnetMask,

+ Thermostat()

+Thermostat

+ Thermostat(deviceType:string, deviceName:string, deviceMAC:string,

deviceGatewayAddress:string) SmartNode(deviceType, deviceName,

deviceMAC, deviceIPv4Address,

deviceIPv4Address:string, deviceSubnetMask:string,

- launchCreateDeviceMACMenu(): void
- launchCreateDeviceIPAddressMenu() : void
- launchCreateSubnetMaskMenu(): void
- launchCreateGatewayAddressmenu(): void
- launchSaveNewDeviceMenu() : void
- resetTempNewSmartNodeContainerStateFlags() : void

- - + attribute2:type

 - operation2(params)
 - operation3()