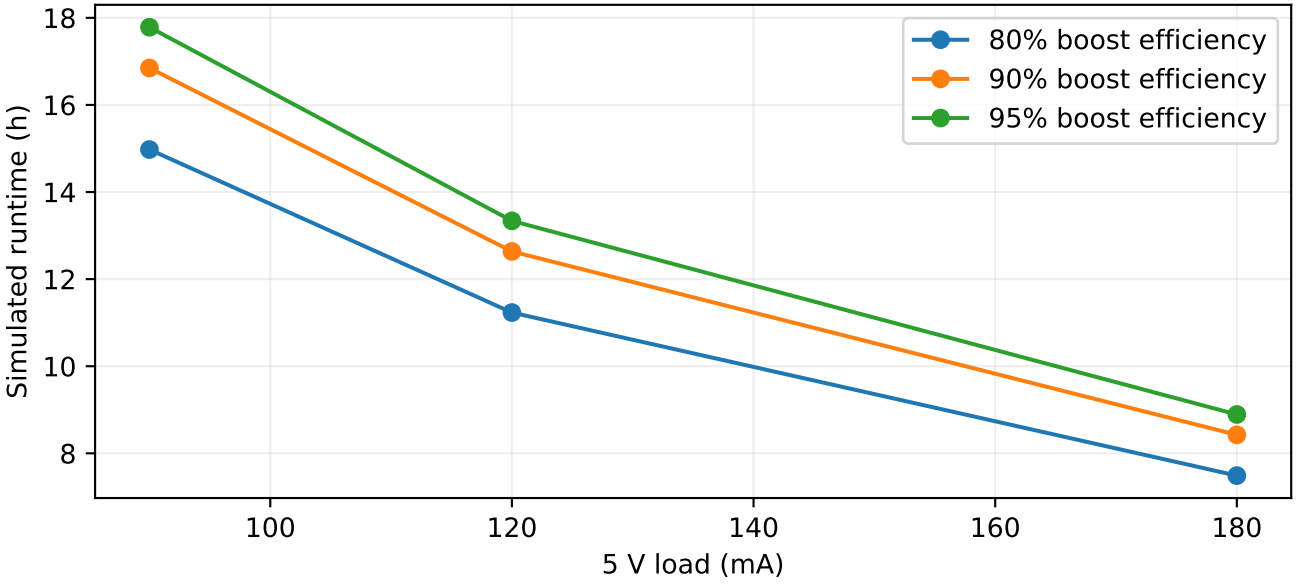
80% boost efficiency
90% boost efficiency
95% boost efficiency
Simulated runtime (h)
18
16
14
12
10
8
100
120
140
160
180
5 V load (mA)