RAWAKORW

Seat Cover Installation Guide

Pre-Installation Reminders

1. If the product is damaged or defective upon receipt, please contact Amazon Customer Service directly for a proper solution.

2. Please read this manual thoroughly or watch the matching installation video before starting installation, and reserve enough complete time to avoid rushed operation.

1. Pre-Installation Preparation

Before formal installation, complete the following preparatory work to ensure smooth follow-up operation and perfect fitting effect:

- **Check Product Integrity**: Confirm the seat cover package is intact, and count the accessories: 2 front seat covers, 2 large headrest covers, 2 small headrest covers, no missing or damaged parts.
- **Clean Seat Surface**: Wipe the front seat surface and gaps with a clean soft cloth, remove dust, debris and dirt, keep the seat clean and dry, which helps the seat cover fit tightly without wrinkles.
- **Adjust Seat Position**: Push the seat to the rearmost position, and recline the seat backrest to about 45°, expand the operating space to make subsequent covering and fixing more convenient.

2. Front Seat Cover Installation

Take the driver's seat as an example, the passenger seat installation method is identical; for one-piece integrated seats, skip Step 1 as headrest removal is not required.



Step 1: Remove the Headrest (Split Seats Only)

①

Three common headrest removal methods:

① **Push-button Type**: Press the release clip on the headrest pole and lift the headrest up.



②

② **Pinhole Type**: Insert a tool (e.g., straightened paperclip or small hex wrench) into the pinhole and lift the headrest up.

③

③ **Slot Type**: Press the slot with the included tool or your finger and lift the headrest up.

Step 2: Put on the Seat Cover

Slide the seat cover over the top of the seat and pull down to fit completely.

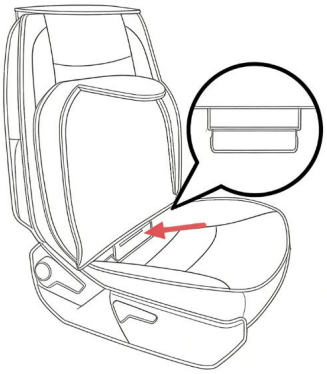

Step 3: Fix with Foam Stick

Insert the foam stick into the gap between the seat back and cushion to help fix the seat cover.

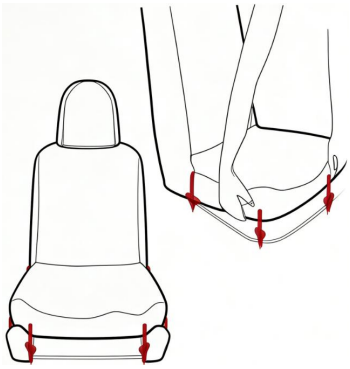

Step 4: Tuck the Bottom Edge

Stretch the bottom fabric of the seat cover under the seat, either wrap it around the seat plastic panel or tuck it into the gap between the cushion and side panel, then adjust to be flat.

Step 5: Fasten the Bottom Straps

Hook the front elastic straps onto the metal frame under the seat; if it's hard to operate, adjust the seat height appropriately. （#It is also acceptable to leave it unsecured.）

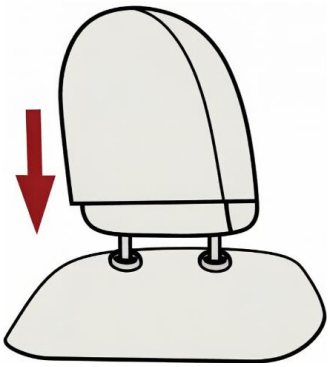

Step 6: Install Headrest Cover

Reinsert the headrest into the seat base, then slide the headrest cover over the headrest from top to bottom and adjust to be flat and wrinkle-free.

Important Safety & Usage Notes

Please read and follow all notes carefully to ensure proper usage and driving safety, do not overlook any item:

- Do not use sharp tools during installation to avoid damaging the seat cover or seats.
- Ensure the seat cover is fixed tightly to prevent slipping while driving.
- Do not cover the seat belt buckle to ensure driving safety.