

Jeep Wrangler Seat Cover Installation Guide

Fitment: Jeep Wrangler (2018-2025)



Precision Fit, Easy Installation

SMS-SR-S-JP3120C-5M-128

Content

1

Front Seat Cover Installation

Front Seat Cover Installation Steps ----- P2-P4

2


Rear Seat Cover Installation

Rear Seat Cover Installation Steps ----- P5-P9

3

Final Check ----- P10

Front Seat Cover Installation

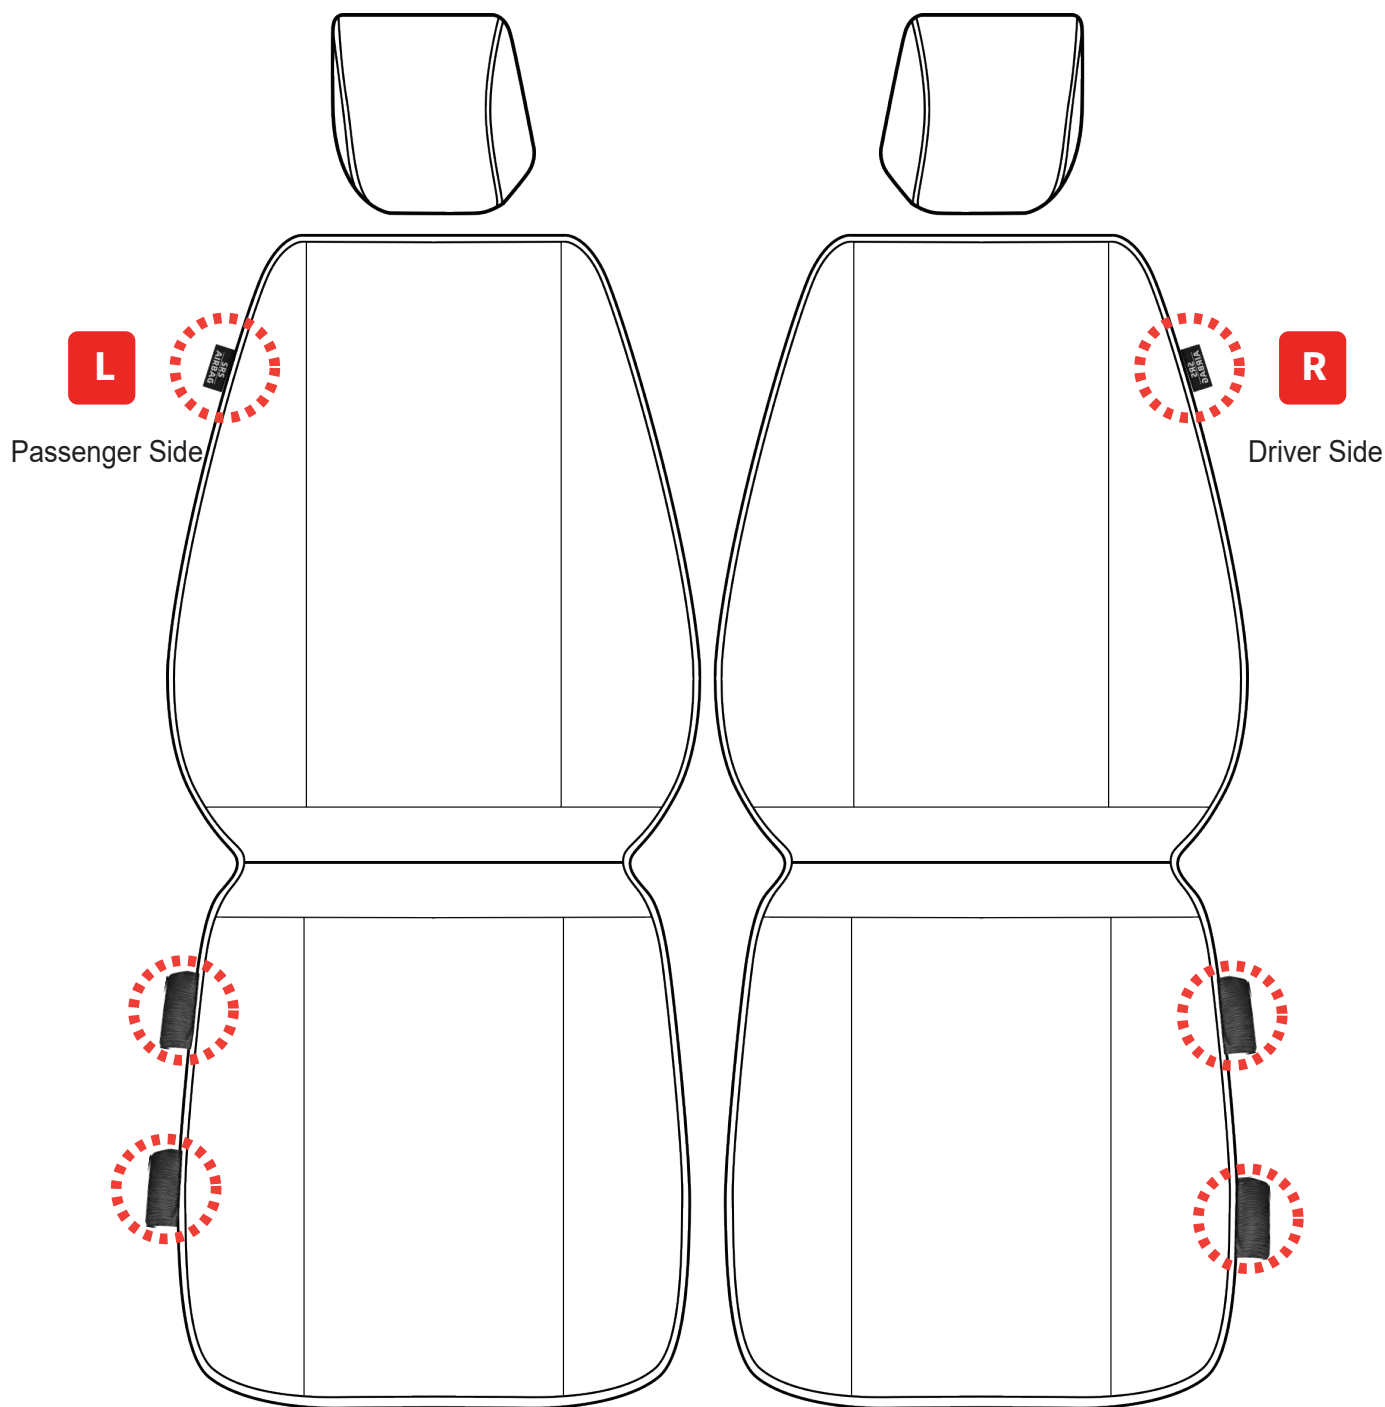

Should you encounter any product-related issues, please feel free to contact our customer service team for assistance.


 Find our brand and get in touch with us.

1 Front Seat Cover Installation Steps

⚠ WARNING: AIRBAG LABEL MUST FACE THE DOOR SIDE TO PROPERLY IDENTIFY DRIVER AND PASSENGER SEAT CUSHIONS. FAILURE TO DO SO MAY IMPAIR AIRBAG DEPLOYMENT.

⚠ Do not hook to seat wires

Friendly Reminder: Adjust gently to avoid straining or breaking the straps

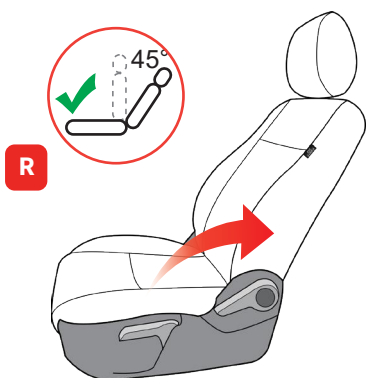

Pull lever to tilt seat back backward




Release the headrest locking button, then remove the headrest.




Unzip the side



Cover from top to bottom

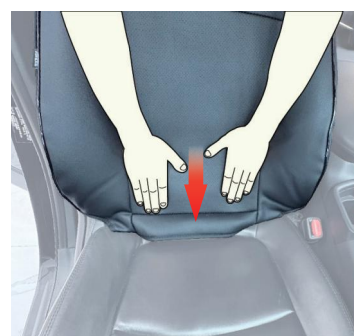

Tuck in the edges

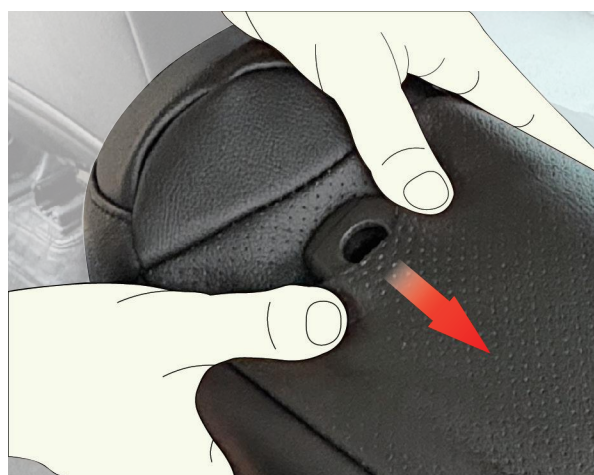

Thread top edge through headrest posts

1 Front Seat Cover Installation Steps

Friendly Reminder: Please distinguish the front and back sides of the headrest cover.



Match the headrest cover shape to your vehicle's to find front and back





Front Headrest Cover Installation






Slide and recline fully back



Tuck the sponge rod firmly by hand or use the tool into the seat gap

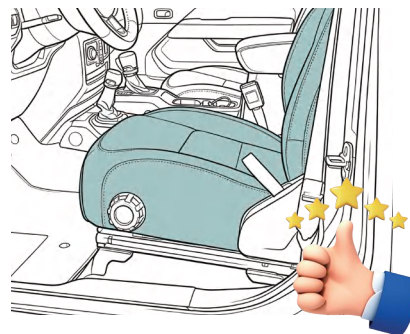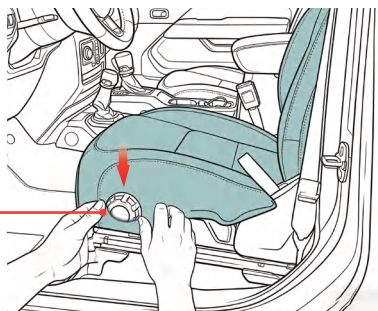


Fit the opening on the side of the driver's seat cover around this knob. If the passenger seat does not have this knob, skip this step.

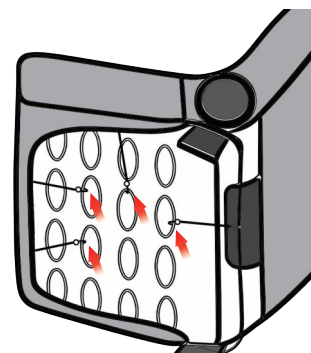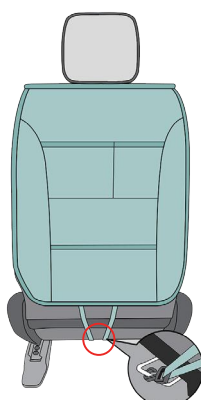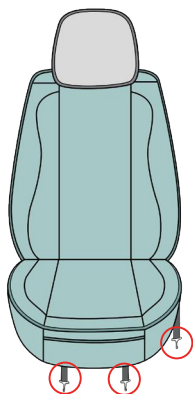

Hook to any sturdy position under the seat


Rear Seat Cover Installation

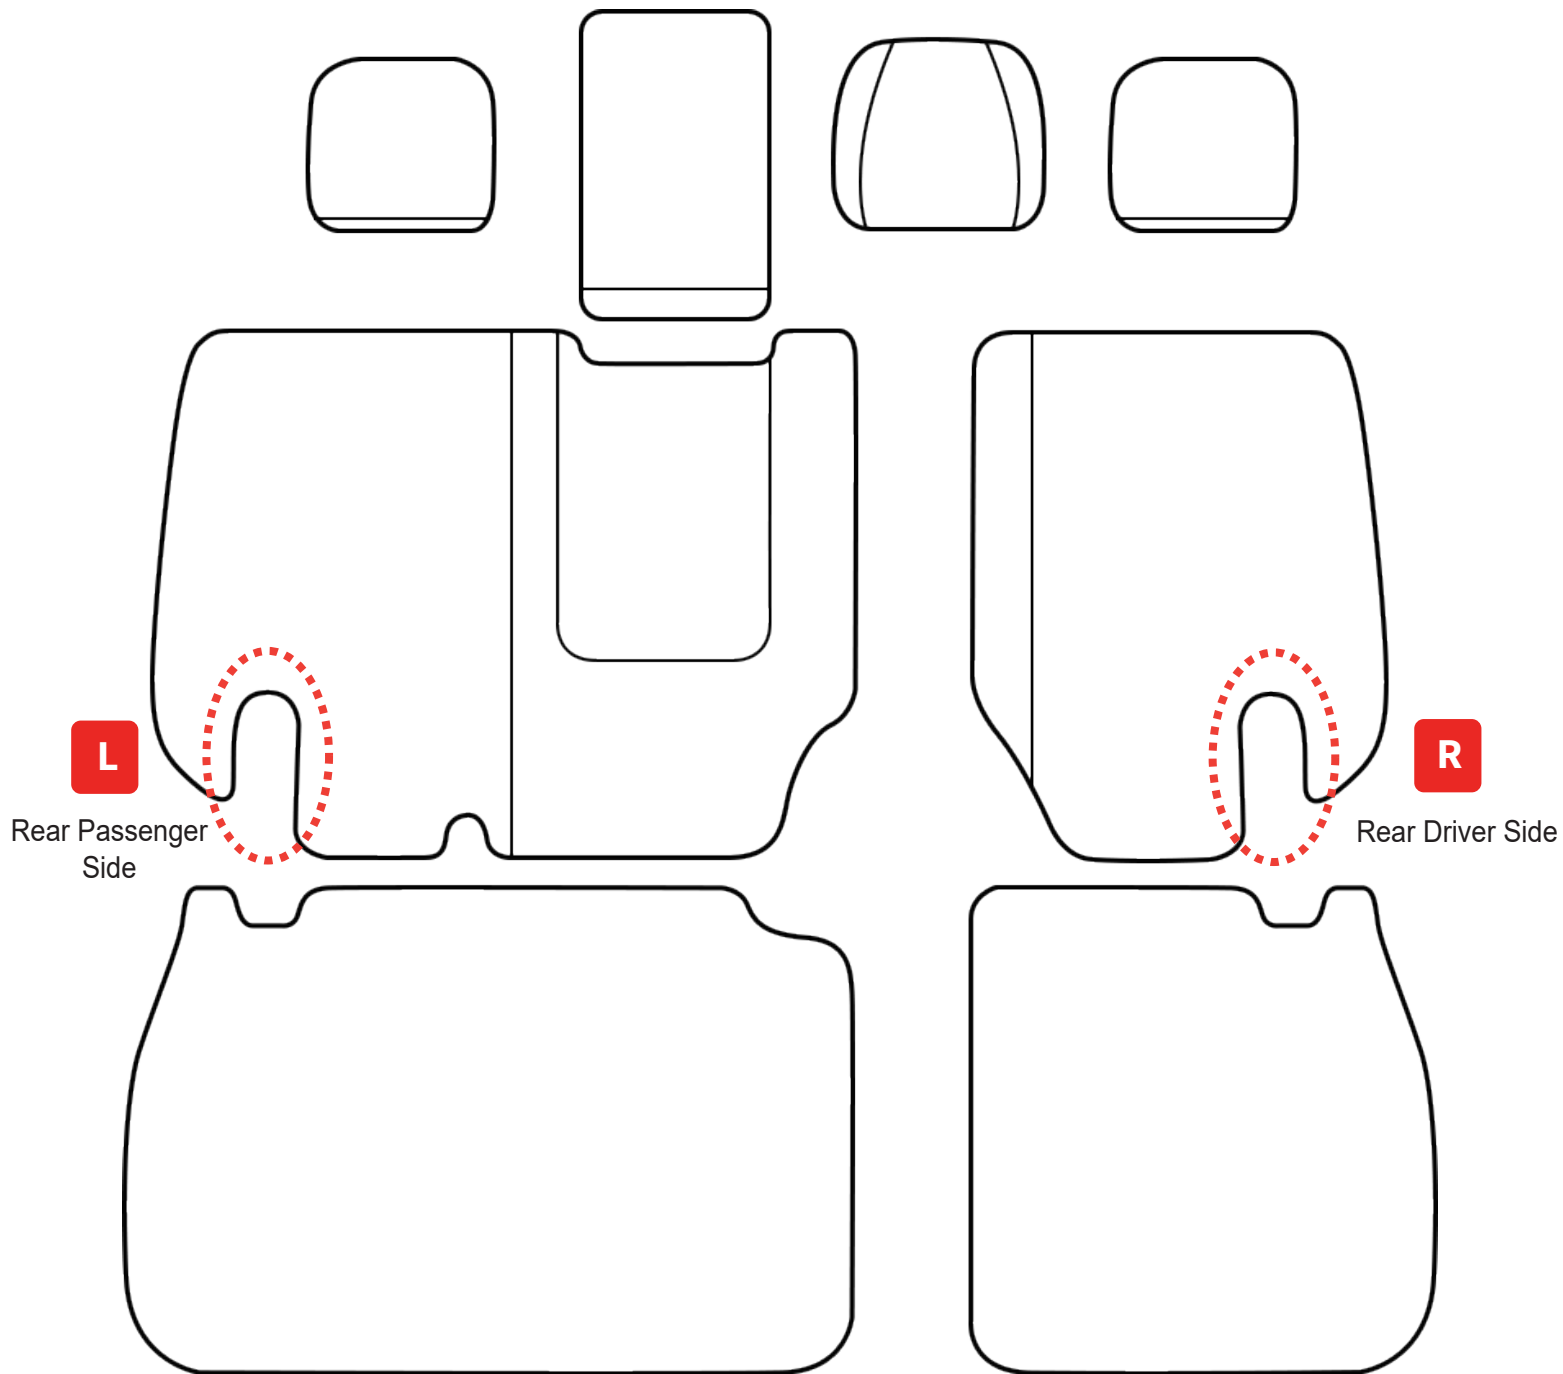


Should you encounter any product-related issues, please feel free to contact our customer service team for assistance.

🔍 Find our brand and get in touch with us.


Rear Seat Cover Installation Steps



Pull the seatback release latch to tilt the backrest



Unzip the back,
Cover from top to bottom

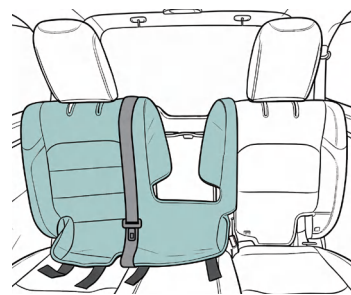



Lift the seatbelt strap to feed the cover through the belt opening, then ensure the belt is fully exposed and functional once the cover is in place




Align the Velcro tabs along the top edge of the seat cover, then press firmly to secure them in place.




Peel off the protective fleece, press the Velcro tab securely

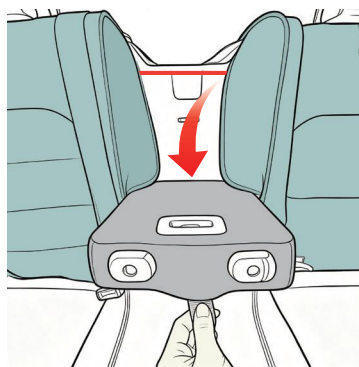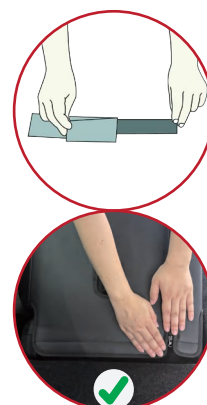

Lower the rear center armrest

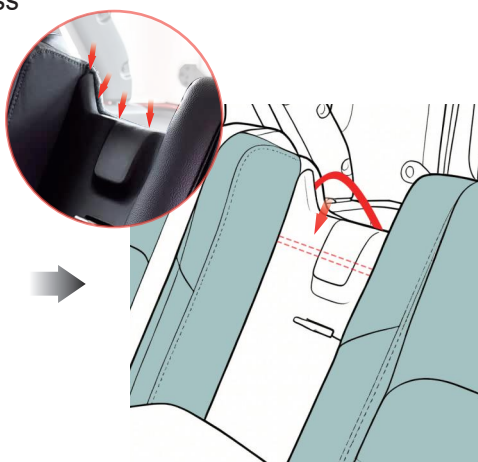


Tuck the elastic strap into the seat gap

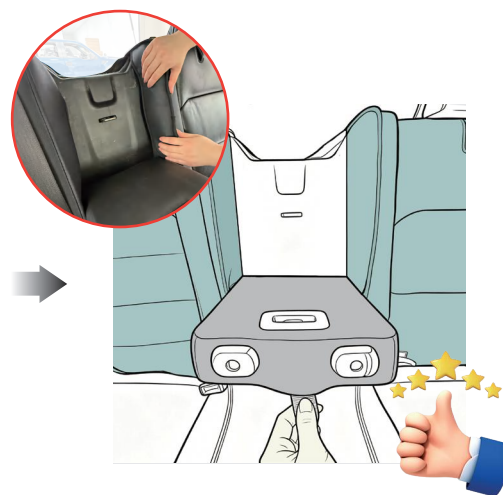

Tuck in the edges




Tuck the Velcro tabs into the gap between the backrest and cushion

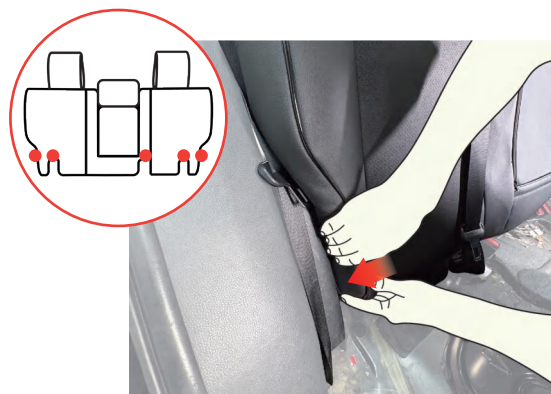


Tuck the edges into the seat gap

Rear Seat Cover Installation Steps

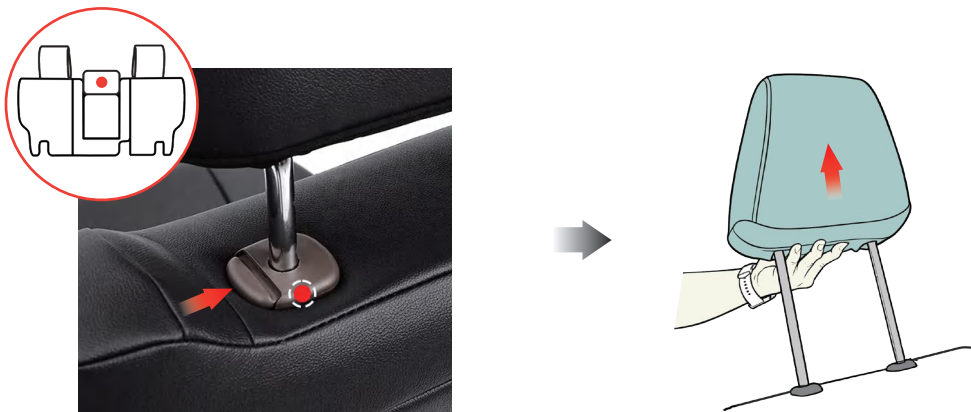

Press and hold the headrest release button on the rear center armrest, then remove the headrest.

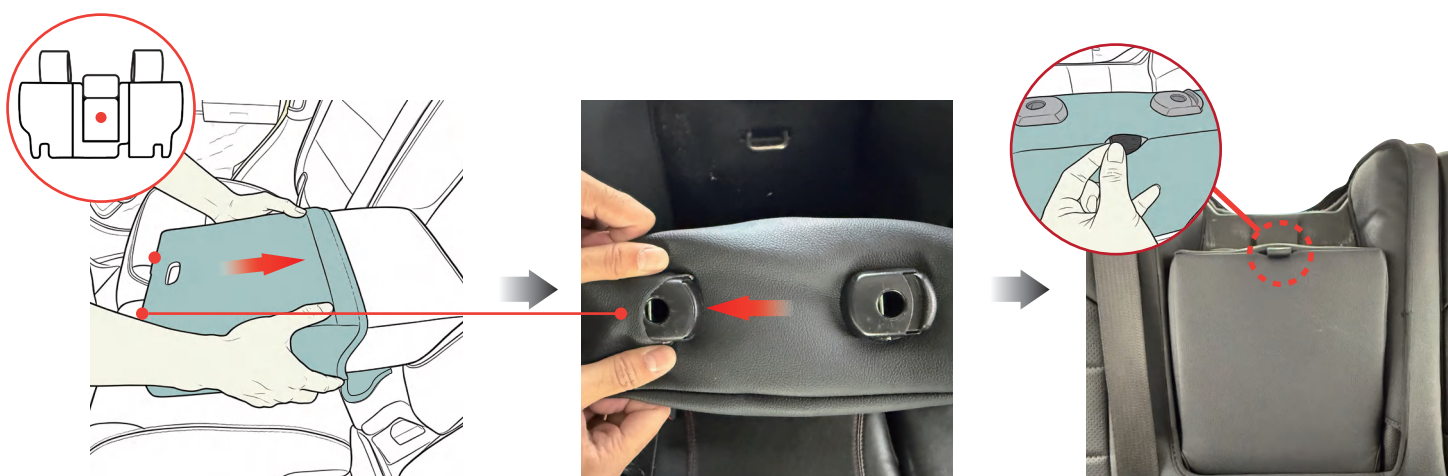

Lower the rear center armrest, then fit the armrest cover over it

Thread top edge through headrest posts


Pull the strap on top of the armrest through the opening in the armrest cover




Tuck the bottom into the gap by hand. If there is resistance, lower the armrest to a 45° angle and then tuck it in.

After feeding the bottom of the armrest cover through the seat gap, pull it out with your other hand

Secure bottom with Velcro

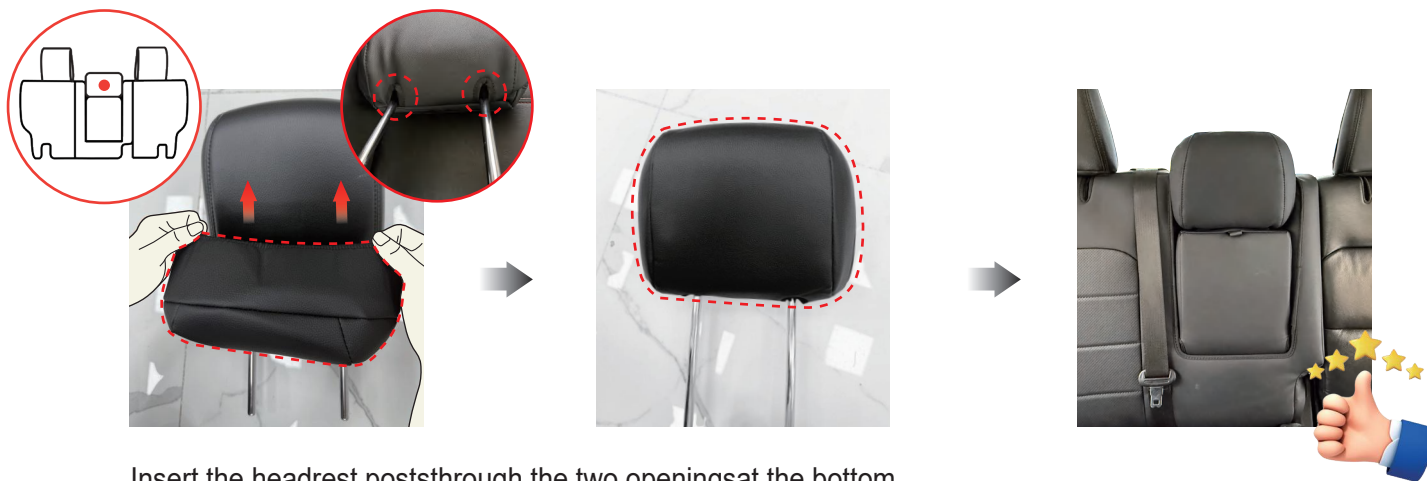

Insert the headrest post through the two openings at the bottom of the headrest cover, then, pull both sides of the headrest cover downward to install

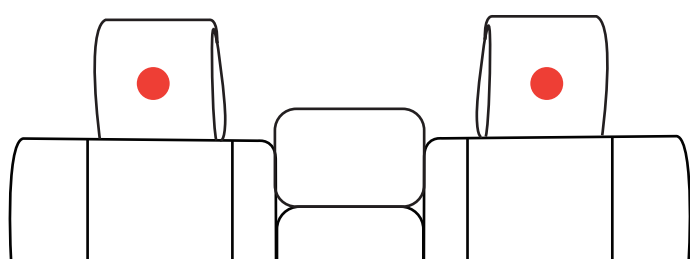


The driver side rear backrest is installed the same way as the passenger side rear one

2 Rear Seat Cover Installation Steps




Tuck the Velcro tabs into the seat gap

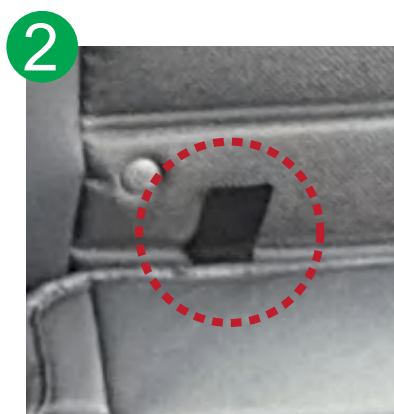

Mark 2

Tuck the Velcro tabs into the gap between the backrest and cushion

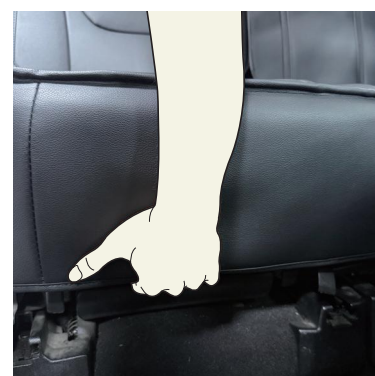

Mark 3

Under-seat gap Velcro fixations

Attach the bottom Velcro tabs to the seat base

The driver's side rear backrest is installed in the same way as the rear passenger's side one.

FINISH – CHECK

1. Make sure no loose edges
2. Ensure all hooks are fixed
3. Ensure all buckles are fastened
4. Ensure seat covers fit tightly
5. Ready for use

Friendly Reminder: Minor creases from shipping will smooth out within 1-5 days after installation.



Great job with the install!
You're a pro.

Show your awesome work to help others see how it fits!

Professional Quality & Worry-Free Service

AOMSAZTO | 20+

Search

AOMSAZTO Jeep Wrangler Accessories



20,000+

Serving 20,000+ Jeep Wrangler Owners
Over the Past 7 Years



2-Yr Free Replace



After-Sales Service



48h Delivery



24/7 Support

Full Interior Protection Kit

27pcs

