Owner's Manual

Seat Covers

SMS-G-SR-S-AL-V1.5-047 1.5

AOMSAZTO

WARM TIPS

Tip#1 Please contact the seller directly if you find the cover is damaged or doesn't fit well. We will send you the replacement

Tip#2 It is recommended that you watch the installation video OR installation instructions first before install

Tips#3 The Airbag flap on the seat covers must be closest to the door on the outside of the seat.

Our factory was established in 2013 with the commitment to design and develop superior quality custom car interior parts& accessoriess,especially dedicated to the design and production of custom seat covers.WVe have designed and manufactured over hundreds of styles for different car model which have been sold worldwide and be loved by our customers.

Our custom seat covers will be your top choice if you are considering to give your precious car a new look.protectively and decoratively.Premium fauxleather. Unique aesthetic design,add new highlights to your car interior.

AOMSAZTO

Contents

1 Preparing for front row installation

2 Front seat covers installation

3 Preparing for rear seat installation

4 Rear seat back covers installation

5 Important Installation Notes

6 Automotive Seat Cushion Usage and Maintenance Guidelines

AOMSAZTO

Preparing for front row installation

Tip Before installation, please confirm that the number of seat covers is correct.

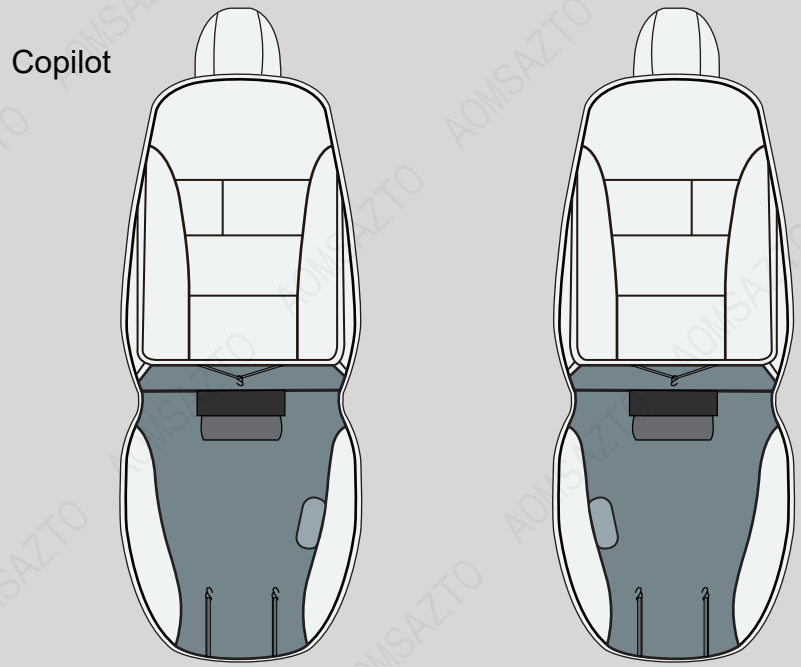

Before installation, distinguish between the driver's and passenger's seat covers

Note: Place the green-marked cotton pad on the outer side of the seat, and align the airbag label on the seat cover.

Front seat covers installation



1.Before installing the seat cover, adjust the seat backward, raise it to a higher position, and recline the backrest to an angle of approximately 45° for easier installation.

2.Unzip the seat cover and slip it over the front car seat.

3.After slipping the cover over the seat back, tidy it up and zip it closed.
(Note: If the zipper cannot be zipped due to obstruction by the center console, please adjust the seat position)



Insert the Sponge Rod into the gap at the bottom of the carseat. (Tip: If theSponge Rod cannot be inserted, recline the seat to insert it)



Insert the foam strip into the gap and tuck the excess edge of the seat cover into the seat crack. If your car does not require the use of this foam strip,you can trim off the foam strip.



Fix the hooks at thebottom of the seatcover to a suitable position under the carseat.



Slide the seat forward. Once there is sufficient space in the rear compartment, hook the fasteners at the bottom of the seat cover onto the underside of the car seat.



Pull the entire sponge rod out from the bottom of the car seat, and hook it onto the appropriate position underneath the carseat.



Complete the installation of the front seat covers.

AOMSAZTO

Preparing for rear seat installation

Tip Before installation, please confirm that the number of seat covers is correct.

Note: Your product may arrive in one of three possible structures—all are normal. Installation is similar across all versions.

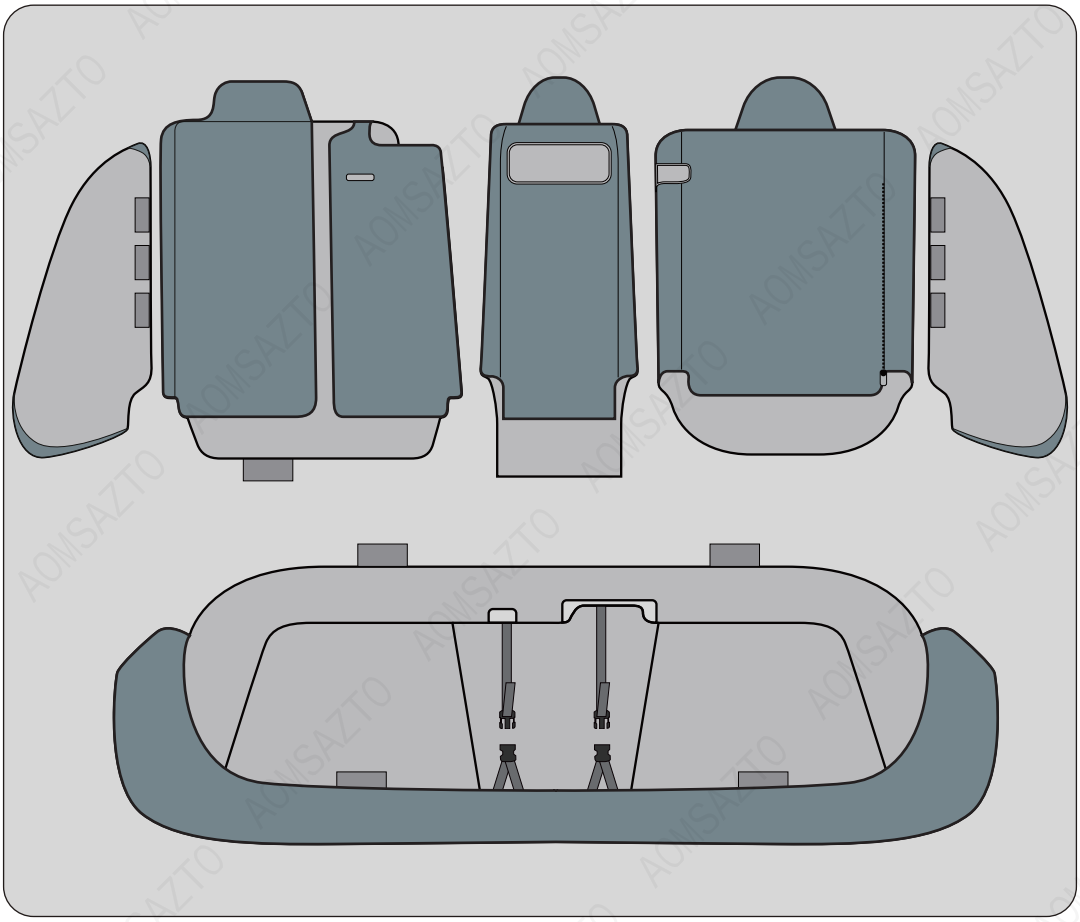

AOMSAZTO

Rear seat back covers installation

Note: If your car seats are configured as 7-seat (2+3+2) or 8-seat (2+3+3) layouts, the installation methods for the rear seats are similar.

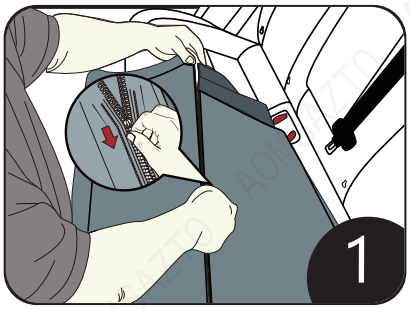

First unzip the cover, fold down the right-side seat back, and then slip the cover over the car seat from the top.
(Note: Thread the cover under the seat belt before slipping it over the seat, to ensure that the seat belt lies on the surface of the cover after installation.)

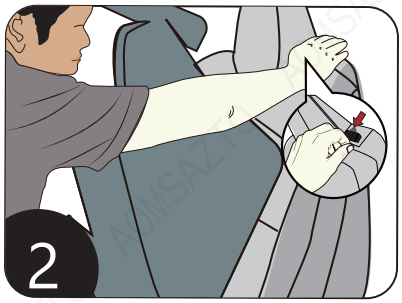

Securely fit the rear seat back cover onto the backrest of the car seat, and fasten the backrest part to the seat cover using the velcro strips.
(Note: Do not peel off all the velcro backing at once; fully adhere it only after the seat cover is completely installed.)

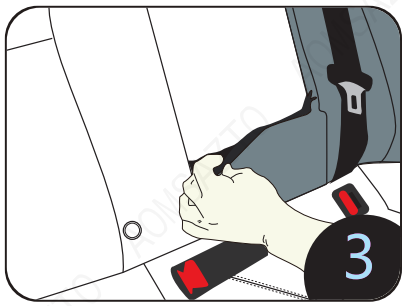

First open the center armrest, then tuck the cotton-padded leather cover into the car gaps to secure it in place.

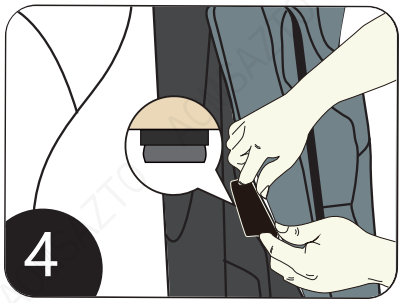

Tuck the leather edges into the gaps of the car seat.

5

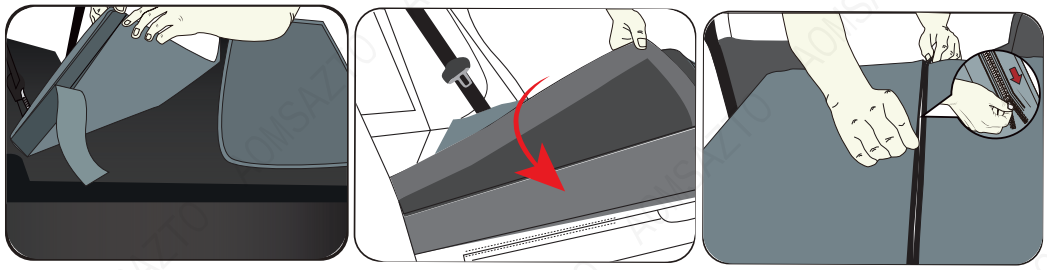

After fully installing and tidying up the seat cover, fold down the seat back, zip up the rear zipper, then peel off all the velcro strips and stick them firmly onto the seat.

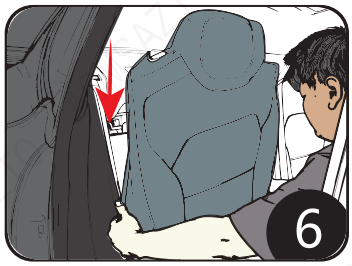

Install the seat back cover on the other side using the same method.



Fold down the center armrest, slip the cover over it from the top, align it with the cup holder opening, then thread the velcro strips through the gap underneath the armrest and secure them in place.

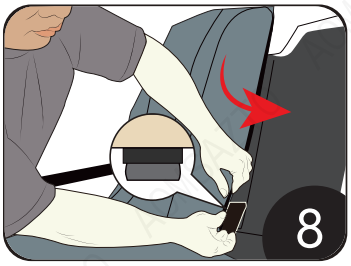

Fold down the seat back and tuck the french fry-shaped cotton pad and leather edges into the seat gaps.

9







First, open the seat cushion switch to pop up the cushion; thread the webbing through the seat belt buckle hole, secure the elastic band under the seat (adjust as needed), and ensure the velcro is fastened in the gap beneath the seat.

10





Tuck all the cotton pads of the seat cover into the gaps under the seat, then reinstall the car seat cushion in place.

Automotive Seat Cushion Usage and Maintenance Guidelines

Installation Recommendations

Prior to installation, ensure the seat surface is clean and free of sharpobjects to prevent scratches or damage to the cushion.When securinghooks or straps, adjust to an appropriate tightness to preventdisplacement during driving.

Odor Treatment for New Cushions

Ventilation: Upon initial use, it is recommended to air out the newcushion in a well-ventilated area for 1-2 days to expedite the dissipationof packaging odors (particularly after sealed transportation).ActivatedCarbon Absorption: For those sensitive to odors, placing activatedcharcoal packets in the vehicle can help accelerate odoradsorption.Avoid Direct Sun Exposure: Prolonged exposure to hightemperatures may intensify odors in certain materials; it is advisable toair-dry in a shaded area.

Cleaning and Maintenance

Regular vacuuming is recommended for automotive seat cushions. Forlocalized stains, gently wipe with a neutral detergent and allow toair-dry naturally.

Tips to Extend Lifespan

Periodically flip or fluff the cushion to maintain even distribution offilling material.If the vehicle is parked for an extended period, removethe cushion to allow ventilation and prevent moisture buildup.

Friendly Reminder:

Should you encounter any product-related issues, please feel free tocontact Amazon Online Customer Service for assistance.