

Tesla Model 3 Seat Cover Installation Guide

Fitment: Tesla Model 3 (2024-2025)



Precision Fit, Easy Installation

SMS-SR-S-TS1230B-5M-112

Content

1

Front Seat Cover Installation

Front Seat Cover Installation Steps ----- P2-P4

2


Rear Seat Cover Installation

Rear Seat Cover Installation Steps ----- P5-P9

3

Final Check ----- P10

Front Seat Cover Installation

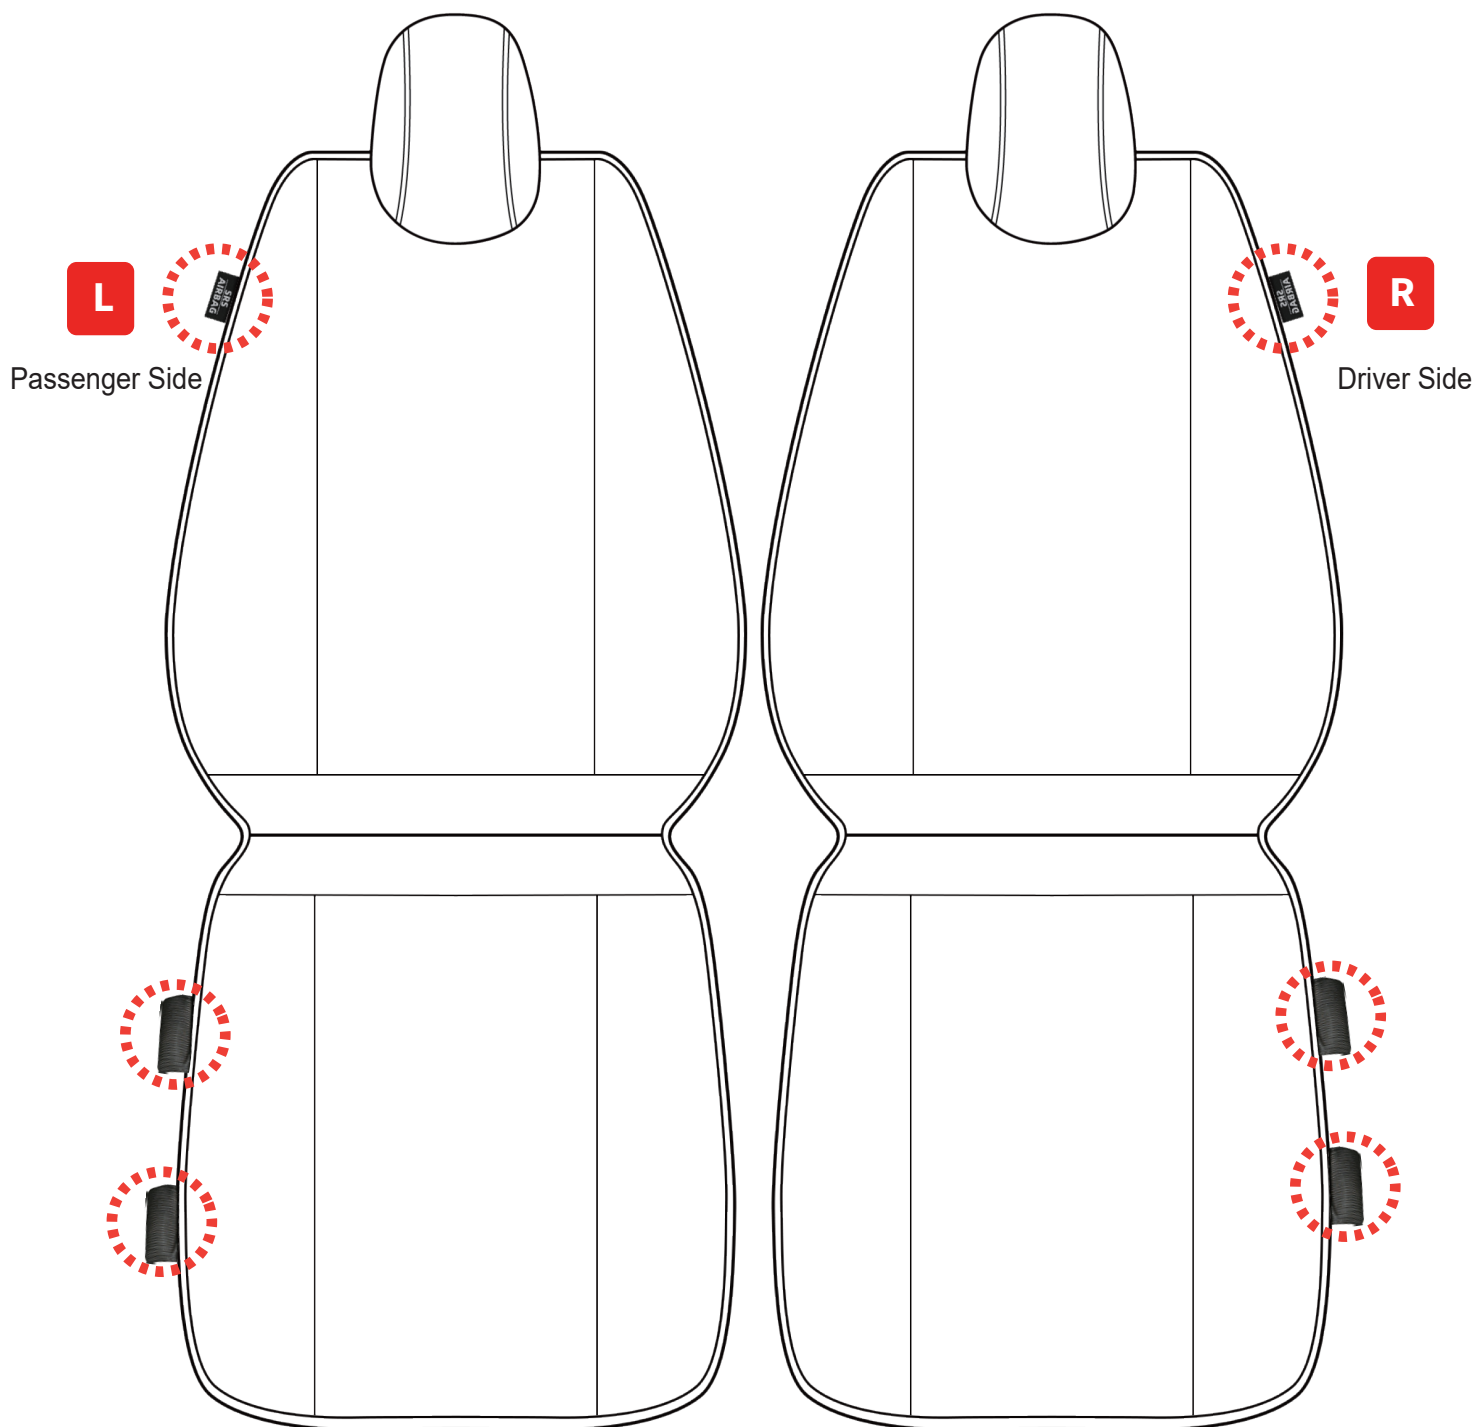

Should you encounter any product-related issues, please feel free to contact our customer service team for assistance.


 Find our brand and get in touch with us.

1 Front Seat Cover Installation Steps

⚠ WARNING: AIRBAG LABEL MUST FACE THE DOOR SIDE TO PROPERLY IDENTIFY DRIVER AND PASSENGER SEAT CUSHIONS. FAILURE TO DO SO MAY IMPAIR AIRBAG DEPLOYMENT.

⚠ Do not hook to seat wires


Friendly Reminder: Adjust gently to avoid straining or breaking the straps

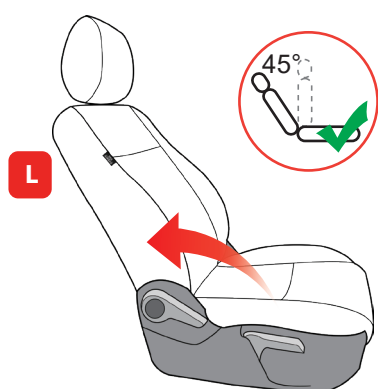

Pull lever to tilt seat back backward





Unzip the side

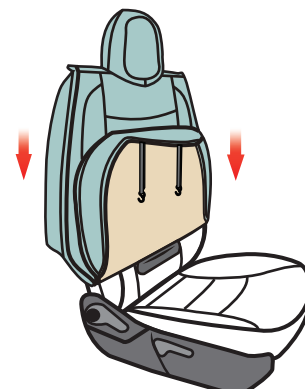

Cover from top to bottom




Tuck the sponge rod firmly by hand or use the tool into the seat gap

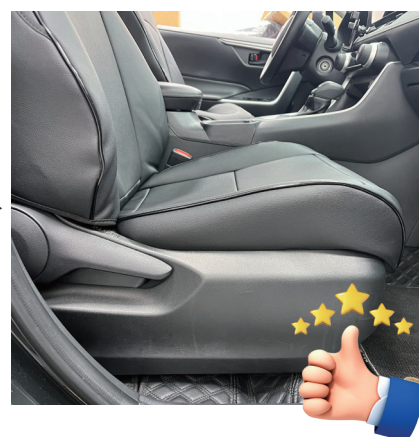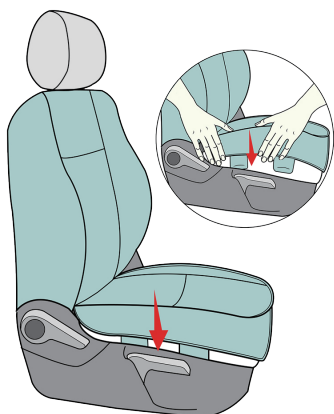


Tuck the sponge rod firmly by hand or use the tool into the seat gap

1 Front Seat Cover Installation Steps

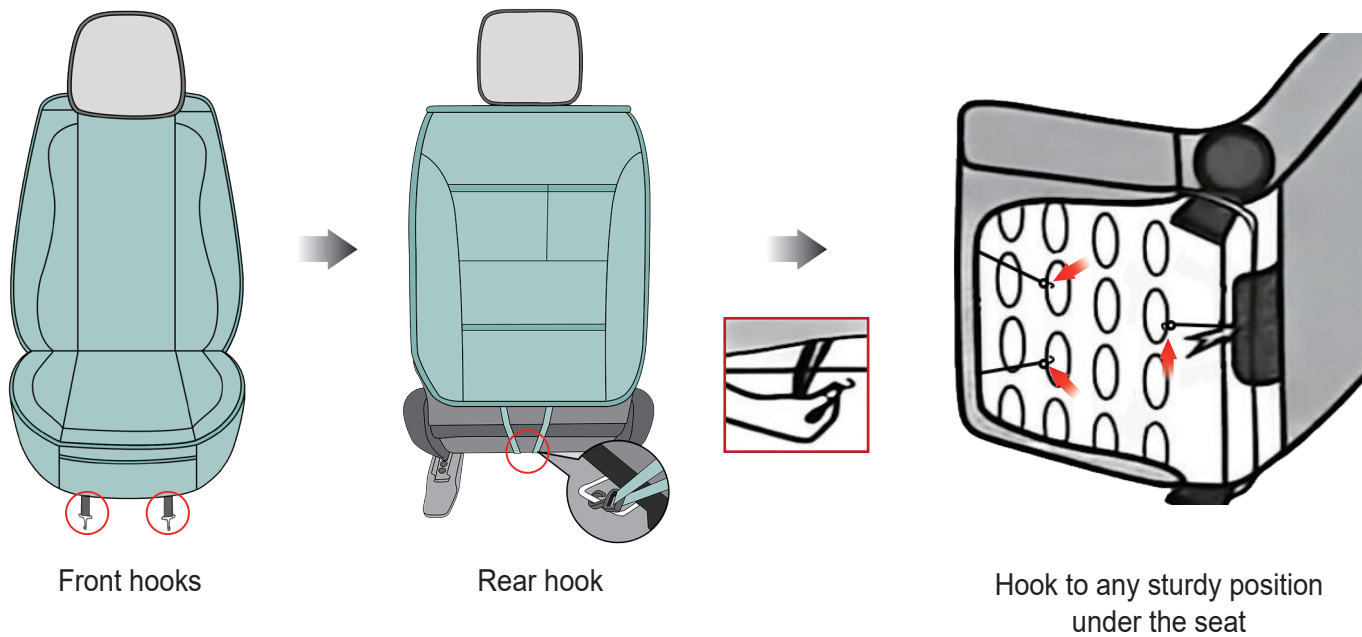

Congratulations!
The front seat cover installation is completed.



Rear Seat Cover Installation

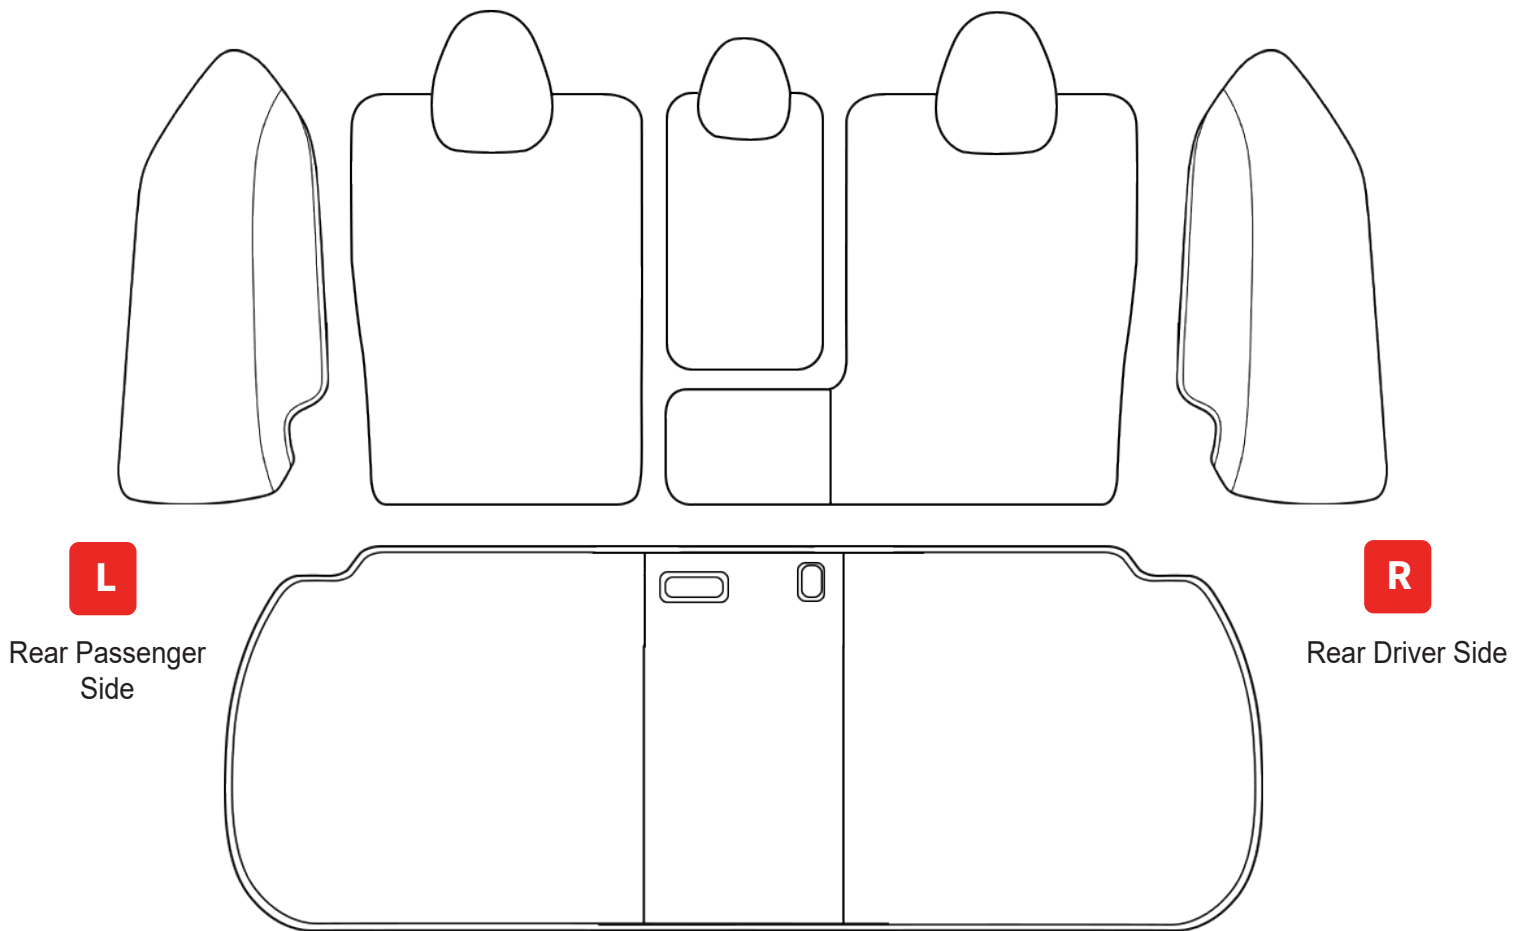


Should you encounter any product-related issues, please feel free to contact our customer service team for assistance.

 Find our brand and get in touch with us.


If your purchased product does not include the seatback bolsters, please skip this step

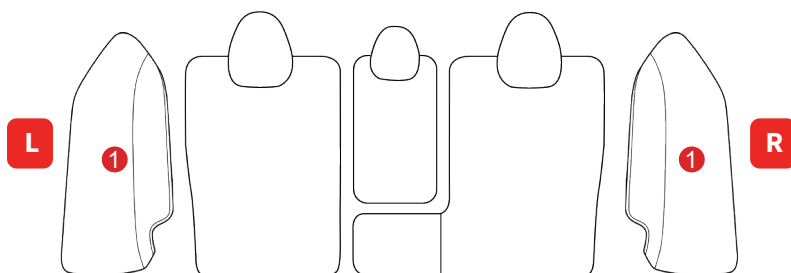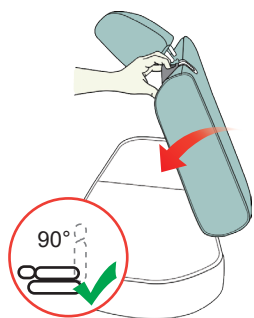

Fold the seat backrest forward until it lies completely flat against the seat cushion at a 90°

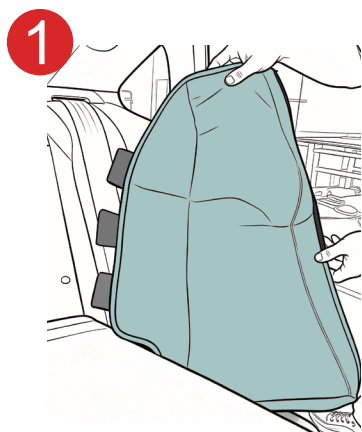


Align the seat back bolsters with both sides of the rear seat. Insert Tab A into the bottom gap first, then insert Tab B. Finally, tuck the three foam rods firmly into the side gaps until fully secured.

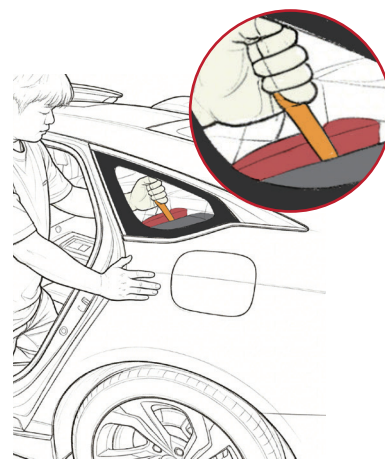


Use the tool to gently pry open a small gap along the seat edge, then tuck the bolster edge into the gap. Keep your fingers pressed firmly against the tucked edge as you slowly slide the tool out to prevent the bolster from pulling loose

For the top edge of the bolster, use the tool to tuck the edge into the gap while visually confirming placement through the quarter window


Rear Seat Cover Installation Steps

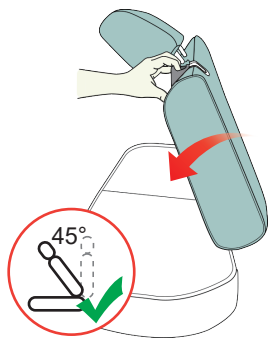

Pull the seatback release latch to tilt the backrest

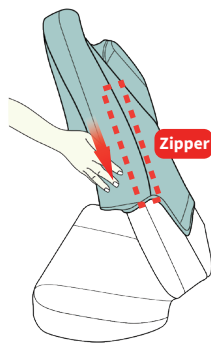




Unzip the back, Cover from top to bottom

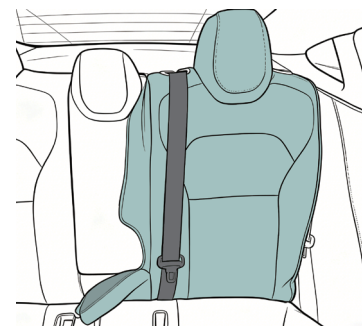


Lift the seatbelt strap to feed the cover through the belt opening, then ensure the belt is fully exposed and functional once the cover is in place



Peel off the protective fleece, press the Velcro securely

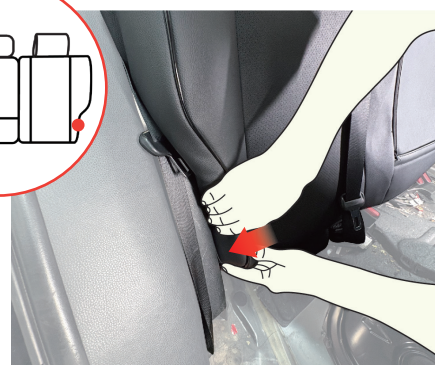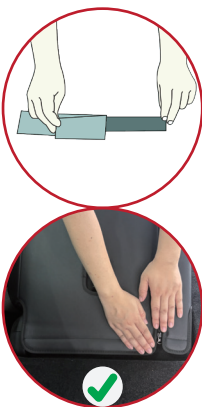

Tuck the edges into the seat gap



Lower the rear center armrest



Tuck the sponge rod and cover edges into the side gap and press firmly to lock them in place




Slide the sponge rod and Velcro tab from the cover into the gap of the rear center seat bolster



Tilt the rear center armrest to 45°, then tuck the Velcro tab into the gap




Rear Seat Cover Installation Steps

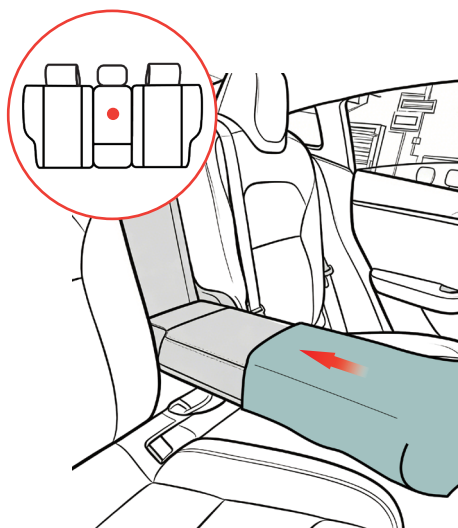

Fit the armrest cover over the rear center armrest



Tuck the bottom of the armrest cover into the seat gap. If you meet resistance, hold the cover in place and gently rock the rear center armrest up and down to work the fabric through the gap

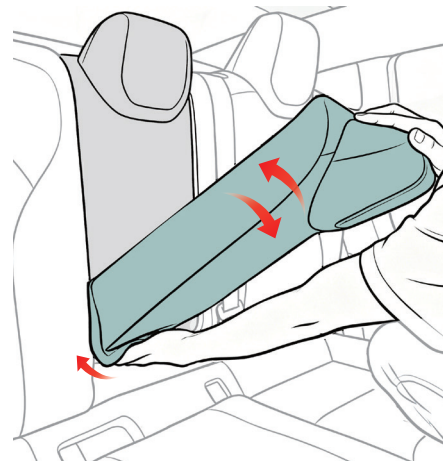

After feeding the bottom of the armrest cover through the seat gap, pull it out with your other hand





Secure bottom with Velcro





The driver side rear backrest is installed the same way as the passenger side rear one



Rear Seat Cover Installation Steps

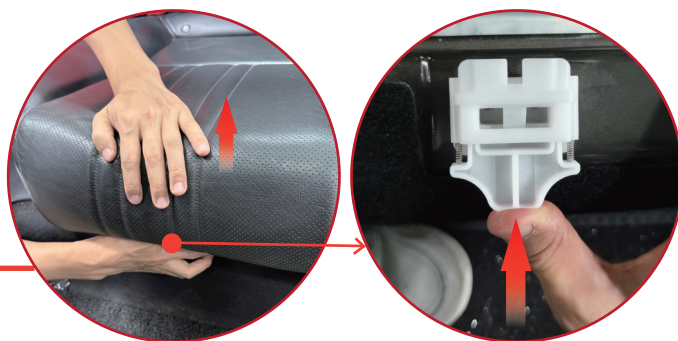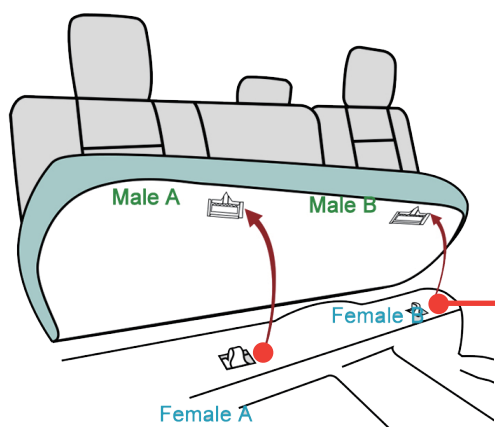

Press down on the seat cushion with one hand, then pinch the female fastener tab and pull outward to lift the cushion

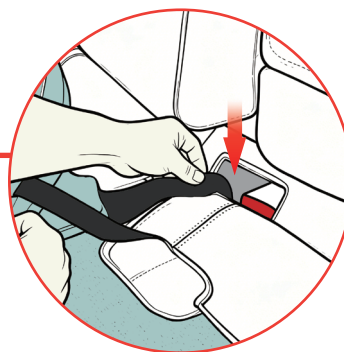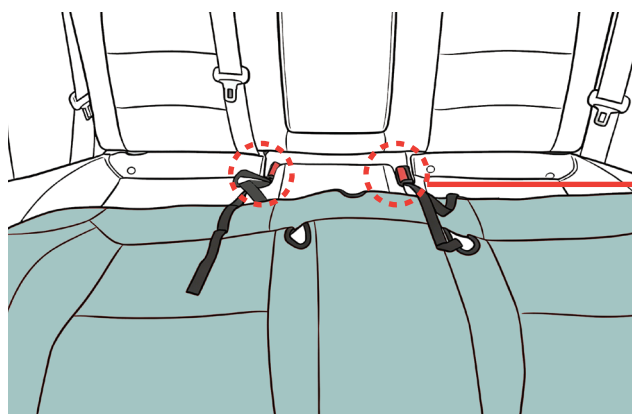

Thread the cover's buckle straps through the seat belt anchor points

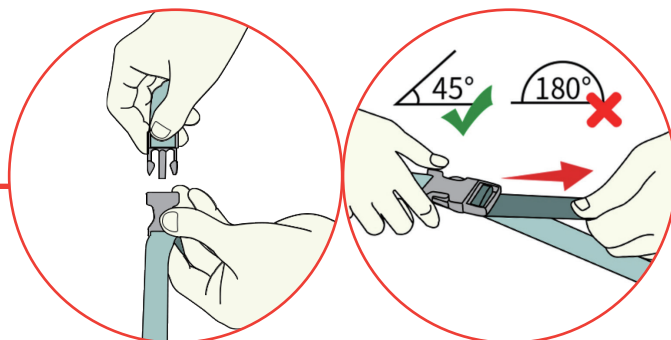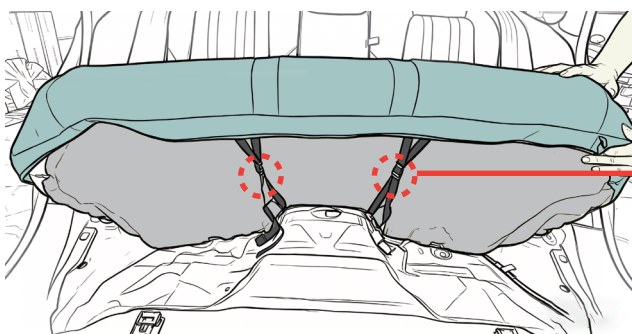

Secure the buckles underneath the cushion



Align the male fasteners (A/B) with the female fasteners (A) and press the seat cushion firmly into place to secure the clips. Rear seat installation is complete.



FINISH – CHECK

1. Make sure no loose edges
2. Ensure all hooks are fixed
3. Ensure all buckles are fastened
4. Ensure seat covers fit tightly
5. Ready for use

Friendly Reminder: Minor creases from shipping will smooth out within 1-5 days after installation.



Great job with the install!
You're a pro.

Show your awesome work to help others see how it fits!

Professional Quality & Worry-Free Service

AOMSAZTO | 20+

Search

AOMSAZTO Model 3 Accessories



20,000 +

Serving 20,000+ Model 3 Owners
Over the Past 7 Years



2-Yr Free Replace



After-Sales Service



48h Delivery



24/7 Support

Full Interior Protection Kit

27pcs

