


-----

Our main departure in thinking from RFC #167 concerns the socket length. (See RFC #164, page 21.) Since there is an apparently serious TIP storage consideration, Rand- assigned sockets will have the high-order 16 bits zero.

Our current use of socket names is diagrammed below.

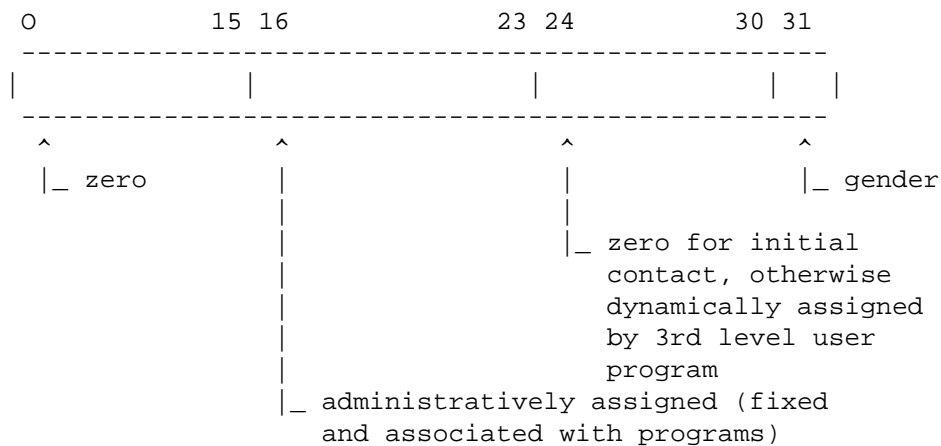

```
[ This RFC was put into machine readable form for entry ]
[ into the online RFC archives by BBN Corp. under the   ]
[ direction of Alex McKenzie.                            ] 12/96
```