



2014



conference  
proceedings  
Volume 2

conference proceedings Volume 2



## 14<sup>th</sup> International Conference

of the European Society for Precision Engineering & Nanotechnology  
Monday 2nd June to Friday 6th June 2014 Dubrovnik, Croatia

Sponsored by:

**OLYMPUS**

Your Vision, Our Future


Proceedings of the 14<sup>th</sup> international conference of the **eu**ropean  
society for **p**recision **e**ngineering and **n**anotechnology

June 2<sup>nd</sup> – 6<sup>th</sup> 2014  
Dubrovnik, Croatia

**Volume II**

**Editors:**  
R. Leach

**Proceedings Compilation:**  
N. Charlton  
D. Nyman  
D. Phillips





## Tuning vibration frequencies with shape memory alloys in precision engineering applications

Roderick Melnik<sup>1</sup>, Ali Sebetci<sup>2</sup>, and Linxiang Wang<sup>3</sup>

<sup>1</sup>*M<sup>2</sup>NeT Laboratory, Wilfrid Laurier University, Waterloo, ON, Canada*

<sup>2</sup>*Department of Mechanical Engineering, Mevlana University, Konya, Turkey*

<sup>3</sup>*Department of Ocean Science and Engineering, Zhejiang University, China*  
[rmelnik@wlu.ca](mailto:rmelnik@wlu.ca)

**Keywords:** shape memory alloys, vibration tuning, frequency adjustment, precision engineering, nanotechnological applications

### Abstract

Shape memory alloys (SMAs) are used widely in a range of applications, including precision engineering, state-of-the-art bio-medical and nanotechnologies. In precision engineering, these materials are used, for example, for automatic alignment of optical systems. In SMA actuators, we often use hysteresis compensation for high-precision positioning, so that SMAs can be applied for control and vibration tuning of various structures. In vibration tuning in many of these applications, it is often necessary to apply supplementary oscillators to absorb the vibration energy input into the primary system. In this contribution we highlight how, due to the thermo-mechanical coupling, the vibration characteristics of the supplementary oscillator can be tuned by changing its temperature. The basis is our dynamic nonlinear model of SMA oscillator which has been simplified for the vibration analysis. At low temperatures, the SMA oscillator behaves as a regular damper by using its dissipation due to mechanically induced phase transformations.

### 1. Coupling primary and adaptive systems

The limitation of the linear mass-spring oscillator used for the vibration absorption and in similar technological applications lies with the fact that it only works when the excitation frequency is known and close (or, ideally, equal) to the natural frequency of the primary system. For many engineering structures, both such frequencies might not be known a priori [1,2]. In such cases, adaptive oscillators with adjustable stiffness would be beneficial in order to tune (and ultimately to control) the vibrations so that the natural frequency of the oscillator can be adjusted to match the resonance

frequency of the primary system. Due to their thermo-mechanical coupling properties, shape memory alloys are promising materials for these purposes.

These advanced materials have already been applied to the adaptive vibration absorption (e.g., [2,3] and references therein), in precision engineering, and in nanotechnological applications [4]. The unique properties of SMAs lead to hardening the elastic modulus of the material at higher temperature (in the austenite state) and to its softening at lower temperature (in the martensite state). When the temperature is continuously adjusted, the elastic modulus of the material will be changing accordingly. Therefore, the thermo-mechanical coupling of SMAs provides a way to adjust the frequency response of vibration absorbers for adaptive vibration tuning. Previous results on the technological applications of SMA (composite) beams showed that the frequency of the oscillator using such beams can be adjusted in a range of 15% (see [3] and references therein).

Up to date, most studies in this field relied on mono-frequency or harmonic assumptions. If one considers the vibration tuning in more realistic situations, where the excitation frequencies may not necessarily be mono-frequency or harmonic and the primary system itself may be nonlinear, then the adaptive vibration absorber designed according to the standard frequency analysis might not be a suitable choice. Indeed, in this case vibration tuning should be implemented by taking energy dissipation into account, ensuring stability and robustness of the system, because of the energy dissipation driven vibration attenuation. In order to exploit the application potential of SMAs in vibration tuning, precision engineering and similar applications, in this contribution we take into account both key SMA properties: the thermo-mechanical coupling and the hysteresis induced by phase transformations. The main ideas are explained on an example of a SMA rod with an end-mass as a vibration absorber [3]. We emphasize that when supplementary oscillators are used in the applications of interest here, we often have to deal with a situation where the primary vibration frequency is not known a priori. In such cases, we have to design a robust supplementary oscillator such that it is able to operate in a rather wide range of frequencies. A SMA-based oscillator is an ideal candidate for these purposes. Hence, we propose a dynamic nonlinear model and its numerical realization for using SMA oscillators as vibration absorbers and in other relevant applications. To model the vibration tuning, the vibration of the primary system and the attached oscillator

should be considered simultaneously. To do so, we formulate the governing equations for the entire system as in [3].

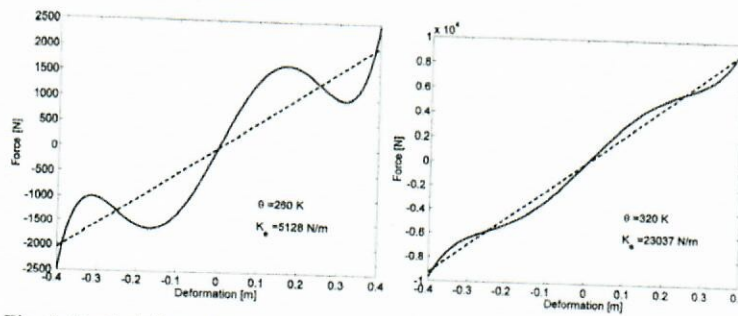


Fig. 1: Typical force-deformation relations of a SMA rod (260K and 320K).

## 2. Shape memory alloy dynamics for precision engineering applications

In order to make the dynamic problem tractable in engineering applications, a dimensional reduction of the fully coupled dynamic three-dimensional model for shape memory alloys has been proposed (see [3] and references therein). The reduced model was approximated by a system of differential-algebraic equations and was applied to the modelling of SMA-based devices such as actuators.

The dependency of the dynamics of the mechanical field on the temperature is included in the proposed formulation. Recently we demonstrated that this model is able to capture the thermo-mechanical coupling effects and the first order phase transformations in SMA rods (see [3] and references therein). However, the main difficulty in applying this model to the analysis of vibration tuning in the context of our present problem is that the dynamic response simulation (accompanied by the simulation of phase transformations and wave propagations in the SMA rod) is computationally too costly for most engineering problems. Following [3], we explain here how to overcome this difficulty.

When the primary system is vibrating with unknown multiple frequencies, supplementary oscillators normally will not perform well by tuning their own natural frequencies in this case, because one supplementary oscillator can absorb only the vibration energy of a single frequency component which matches with the supplementary oscillator, with no effects (or very minor effects) on other frequency components. When the SMA oscillator is used in this case, it could be tuned to work



in its low temperature range in which the martensite transformations could be induced. However, such martensite transformations and martensite re-orientations are always accompanied by mechanical energy dissipation, and as a result, abroad-band vi- bration attenuation might be induced. In this case, the mechanism of vibration suppression will be different from that of attaching supplementary oscillators. The interested reader is referred to [3] (and references therein) for further discussion on vibration damping by using the mechanically induced phase transformations in SMAs in a situation described above.

The important results of our study include our proposed dynamic nonlinear model for SMA-based oscillators in the vibration absorption and precision engineering applications, as well as the evaluation of the performance of such oscillators. An essential part of such oscillators - the SMA rod - is modelled on the basis of the Ginzburg-Landau theory. The resulting nonlinear model accounts for both thermo-mechanical coupling and hysteresis effects induced by phase transformations. Numerical simulations, carried out for various excitation frequencies, demonstrate that the SMA vibration absorber could be adaptive in a sense that it could be adjusted to match different frequencies by changing its temperature. In particular, based on estimated values of temperature for the vibration absorption, our results show that the vibrations of the primary mass block are successfully attenuated by using the SMA absorber. In the general case, due to nonlinearity of the force-deformation relation (see Fig. 1), the best temperature for the vibration absorption should be found by using an appropriate optimization procedure. We conclude by a discussion of SMAs in nanotechnological applications in the context of [4].

**Acknowledgments:** RM and AS are grateful to TUBITAK for its support.

#### References:

- [1] Y.H. Teh and R. Featherstone, An architecture for fast and accurate control of shape memory alloy actuators, *Int. J. Robotics Research*, 27 (5), 595-611, 2008.
- [2] G. McGavin and G. Guerin, Real-time seismic damping and frequency control of steel structures using Nitinol wire, *Proceedings of SPIE*, 4696, 176 – 184, 2002.
- [3] L. Wang and R.V.N. Melnik, Nonlinear dynamics of SMA oscillators in tuning structural vibration frequencies, *Mechatronics*, 22 (8), 1085-1096, 2012.
- [4] R.P. Dhote, R.V.N. Melnik, and J. Zu, Dynamic thermo-mechanical coupling and size effects in finite SMA nanostructures, *Computational Materials Science*, 63, 105-117, 2012.

Proceedings of the euspen 14<sup>th</sup> International Conference  
Volume I - Volume II

**Reviewed by:**

Mr D. Arneson  
Mr. S. Azcarate  
Dr K. Beckstette  
Prof. L. Blunt  
Dr H. Bosse  
Prof. C. Brecher  
Prof. W. Brenner  
Prof. E. Brinksmeier  
Dr ir. D. Brouwer  
Prof. S. Büttgenbach  
Mr K. Carlisle  
Dr. S. Carmignato  
Dr K. Carneiro  
Prof. K. Cheng  
Prof. D. Chetwynd  
Dr P. Comley  
Prof. J. Corbett  
Prof. G. Davies  
Prof. L. De Chiffre  
Dr. P. de Groot  
Dr. C. Doring  
Mr P. Eklund  
Dr W. Tyler Estler  
Dr C.J. Evans  
Dr G. Florussen  
Dr.ir. J. Franse  
Assist. Prof. Marina Franulović, D. Sc  
Dr H. Haitjema  
Prof. H. N. Hansen  
Dr S. Henein  
Prof. R. Hocken  
Dr. W. Holzapfel  
Dr. A. Islam  
Prof. S.W. Kim  
Dr W. Knapp  
Dr L. Kudla  
Dr P. Kwan  
Prof. R. Leach

Prof. R. W-B Lee  
Dr S. Ludwick  
Dr. T. Lundholm  
Prof. X. Luo  
Mr P. T. Martin  
Prof. L. Mattsson  
Prof. G. McFarland  
Prof. P.A. McKeown  
Dr. K. Monkkonen  
Mr P. Morantz  
Prof. T. Moriwaki  
Prof. R. Munnig Schmidt  
Dr W. Preuss  
Dr A. Rankers  
Prof D. Reynaerts  
Dr O. Riemer  
Dr. J. Roblee  
Prof. E. Savio  
Dr Ing. H. Schwenke  
Prof. P. Shore  
Prof. A. Slocum  
Dr H. Spaan  
Dr S.A. Spiewak  
Dr P. Subramanyan  
Prof. Dr. K. Takamasu  
Prof. Y. Takeuchi  
Dr. G. Tosello  
Mr M. Tricard  
Prof. H. Van Brussel  
Prof. J. van Eijk  
Dr. M. Verdi  
Dr D. Walker  
Dr C. Wenzel  
Dr. J. Yagüe-Fabra  
Prof. K. Yamamura  
Dr M. Zatarain  
Prof S. Zelenika

Published by euspen  
ISBN 14: 978-0-9566790-3-1

Printed in Netherlands May 2014  
Sieca Repro  
Turbineweg 20  
2627 BP, Delft

© euspen Headquarters  
Building 90, Cranfield University, Bedford,  
MK43 0AL  
Tel: 0044 (0) 1234 754023  
Website: [www.euspen.eu](http://www.euspen.eu)

Information correct at time of printing and may become subject to change

**OLY**

Your V

Opto  
Experien

Calling all p

Olympus, in  
the chance

**OLYMPUS E**  
Postbox 10 49 06, 10



conference proceedings Volume 2