

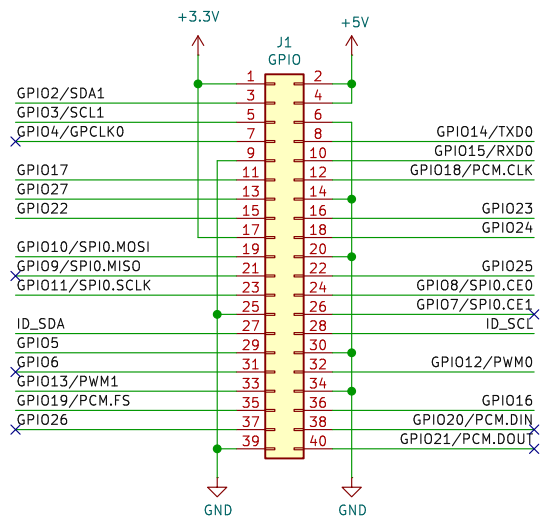



File: pot-adc.kicad_sch




File: eeprom.kicad_sch

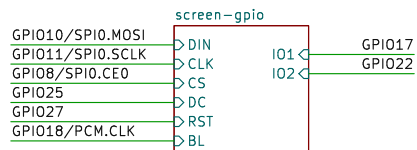


File: screen-gpio.kicad_sch



File: buttons.kicad_sch



File: midi.kicad_sch




File: clock.kicad_sch

Sheet: /
File: protosync.kicad_sch

Title: Protosync

Size: A4 Date: 2026-05-15
KiCad E.D.A. 9.0.7

Rev: 1.0.0
Id: 1/7

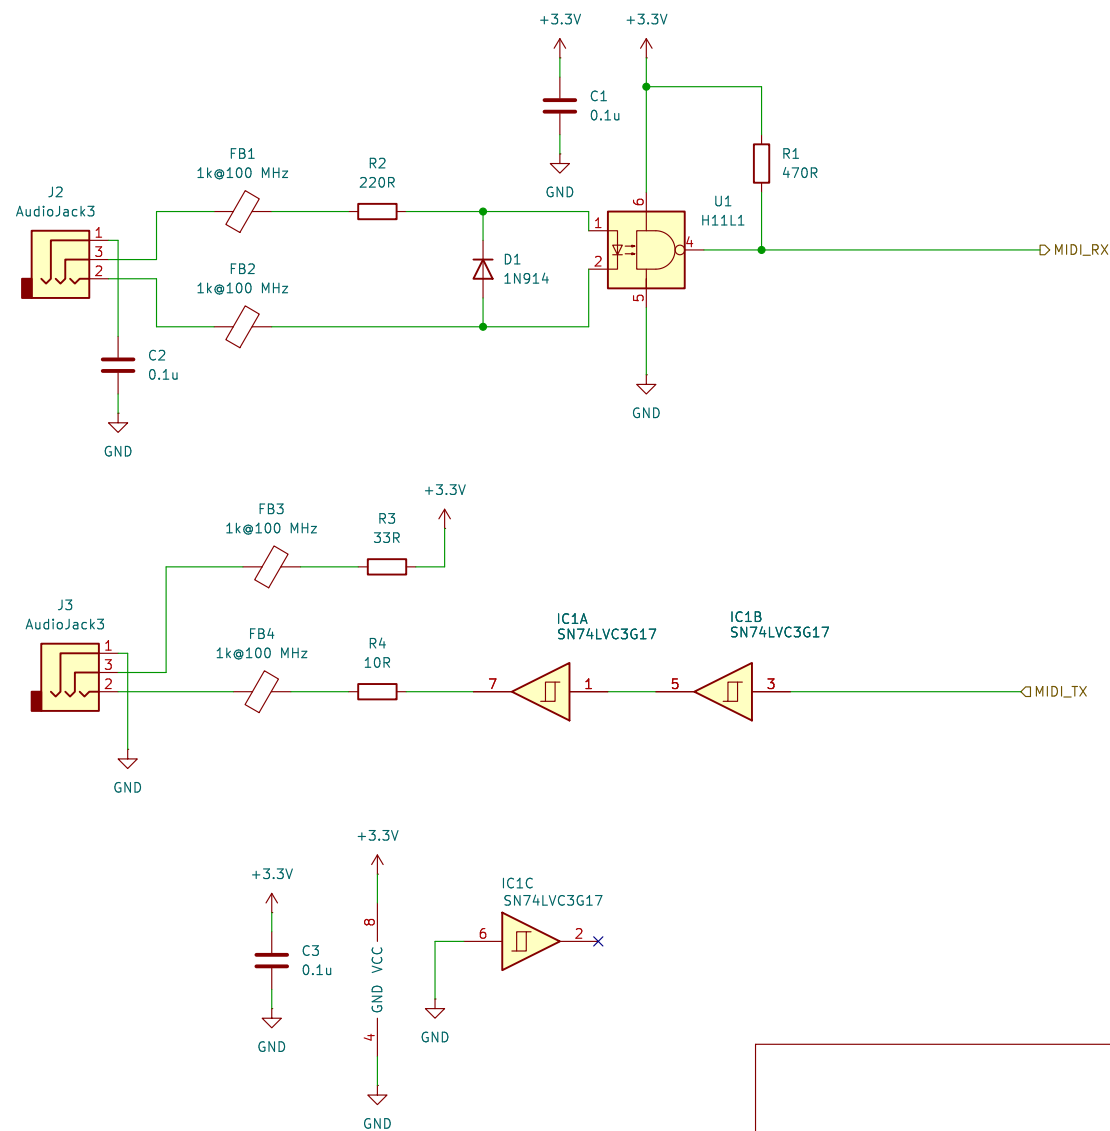

Sheet: /midi/
File: midi.kicad_sch


Title: Protosync




Size: A4 Date: 2026-05-15

KiCad E.D.A. 9.0.7

Rev: 1.0.0

Id: 2/7

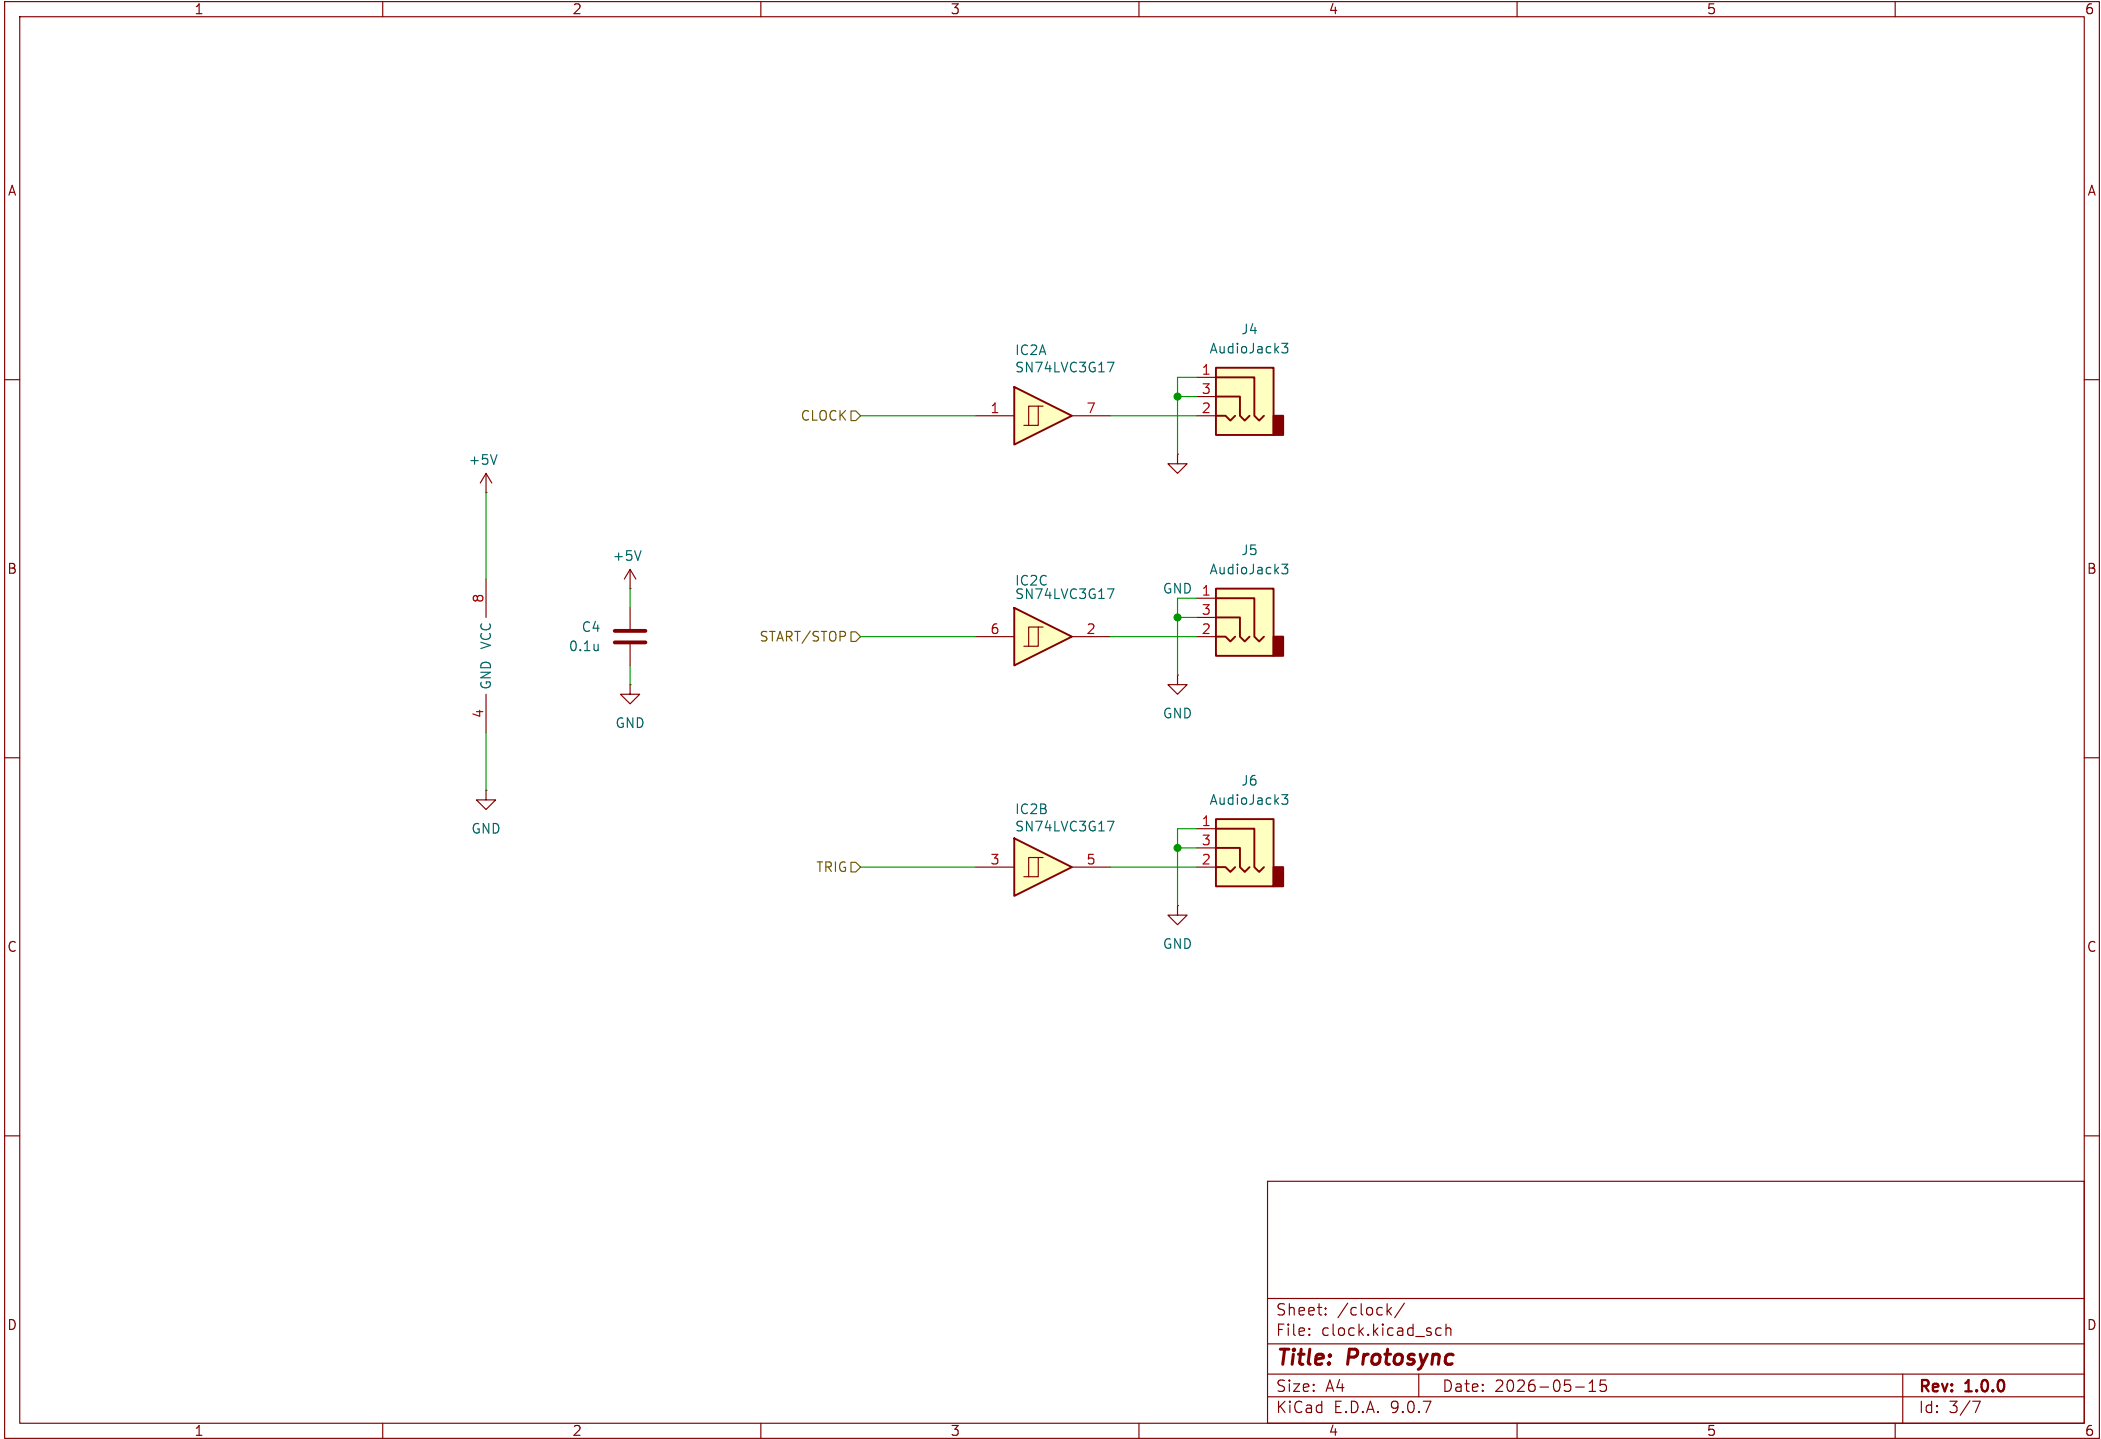

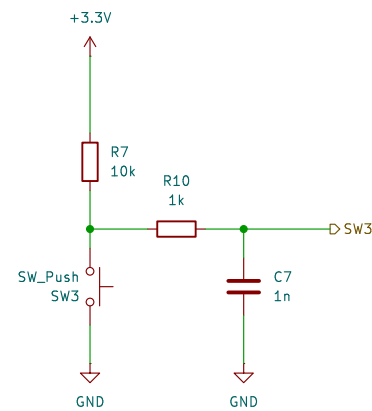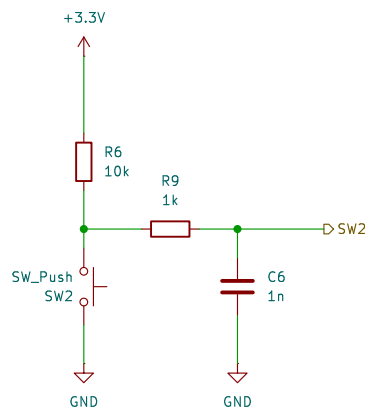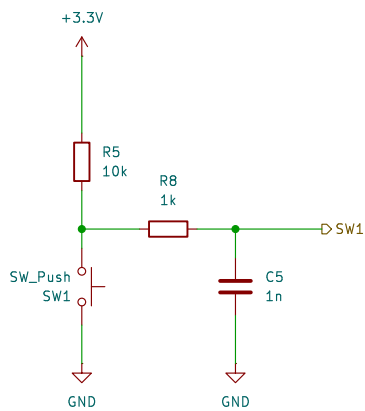

Sheet: /buttons/
File: buttons.kicad_sch

Title: Protosync

Size: A4 Date: 2026-05-15

KiCad E.D.A. 9.0.7

Rev: 1.0.0


Id: 4/7



ID_SD and ID_SC PINS:
These pins are reserved for HAT ID EEPROM.

At boot time this I2C interface will be
interrogated to look for an EEPROM
that identifies the attached board and
allows automatic setup of the GPIOs
(and optionally, Linux drivers).

Bridging JP1 enables write protection.

DO NOT USE these pins for anything other
than attaching an I2C ID EEPROM. Leave
unconnected if ID EEPROM not required.

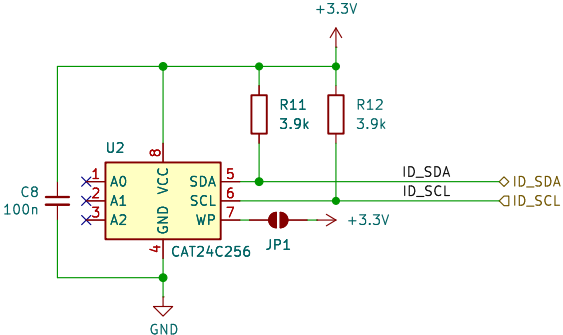

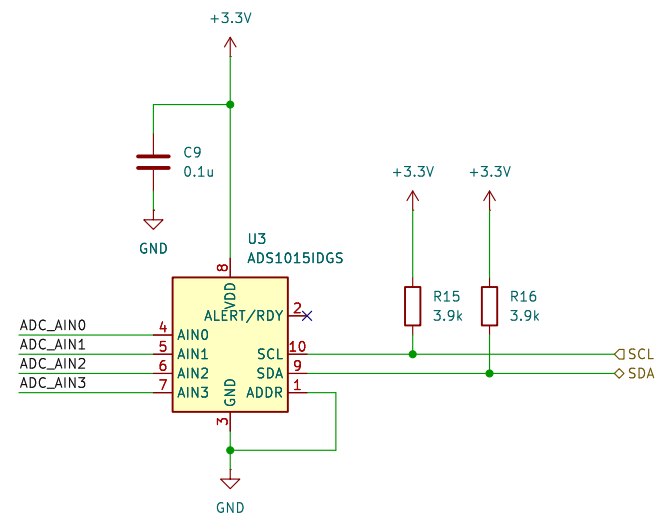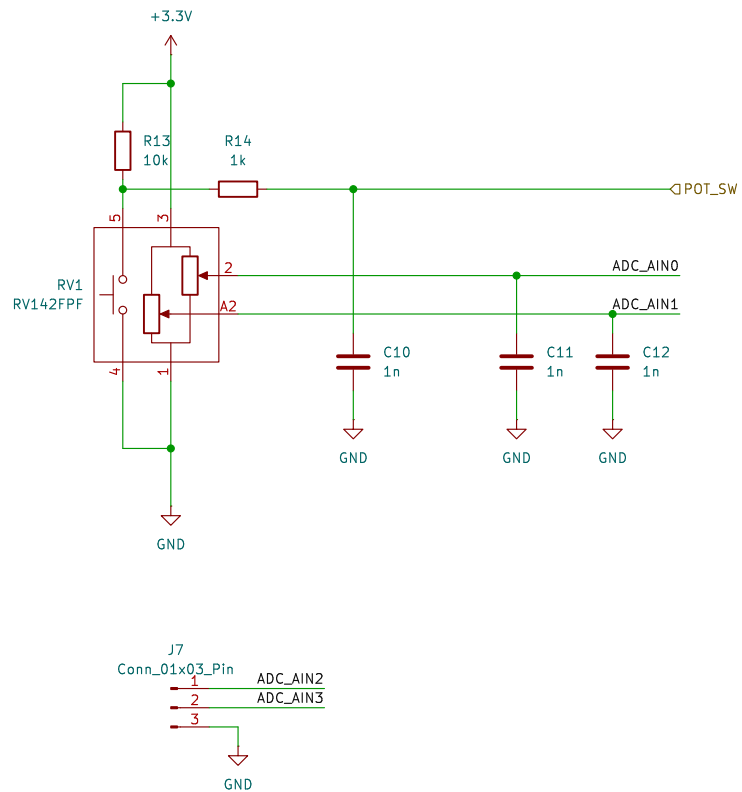

Sheet: /pot-adc/
File: pot-adc.kicad_sch

Title: Protosync

Size: A4 Date: 2026-05-15

KiCad E.D.A. 9.0.7

Rev: 1.0.0

Id: 6/7

