
Bus types
General purpose bus
Ignition
Injection
Analog inputs (sensors)
Discrete inputs
LS & HS outputs
DC Motor

M5
Module-wbo-0.6
5569-06A2
J3
J6
Conn_01x06
M7
Module-can-0.1
5569-18A2
J5
5569-08A2
J4
M6
Module:mega-mcu100/0.3
uSD card and accelerometer on SPI1 bus
Ignition
LS HOT
3.5A MAX
Always hot capable
Injector
LS
3.5A MAX
Solenoid load capable
DC Driver 1
DC Driver 2
Flyback diodes
Barometer on this I2C bus
F40x does not have UART8
Internal TC2030 connector
Internal buttons
Move the resistor from position R143 to R145 to enable the CAN WAKEUP function. The AUX1 analog input will be unavailable.
Move the resistor from position R6 to R5 to use ADC3 for receiving the analog signal VR-DISCRETE instead of the knock signal
Pin 8 may be used for shielding VR signals
Install a 4.7 kOhm R1 resistor for using VR2- as a hall sensor input
M3
Module-vr-discrete-0.5
M4
Module-vr-max9924-0.1
M2
Module-knock-0.2
M1
Module-power_12and5V-0.3
Bluetooth Module
Configurable "BUTTON" pulls
1N4148WS CR1220

Pin	Name	Recommended function
B8	OUT_LS_HOT2	Fan Relay
B9	OUT_LS_HOT1	Main Relay
B16	OUT_LS4	Fuel Pump Replay
B18	OUT_LS2	Idle Air Valve
C8	GND	VR Shield
C15	IN_AUX3	Fuel Pressure
D10	IN_BUTTON2	A/C Request

All inputs are 12V-tolerant

Hellen-One-PCB-logo
https://rusefi.com/s/uaefi
rusEFI.com
Sheet: /
File: uaefi.kicad_sch
Title: UAEFI
Size: A3 | Date: 2026-09-01 | Rev: F3
KiCad E.D.A. 10.0.8 | Id: 1/9

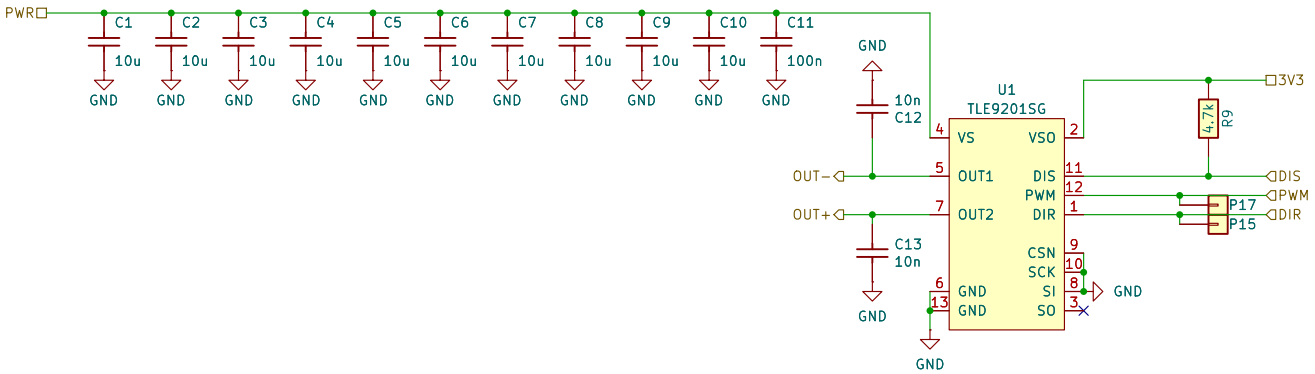


rusEFI.com

Sheet: /DC Driver 1/

File: DC_MOTOR_0.1.kicad_sch

Title: UAEFI

Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.8		Id: 2/9

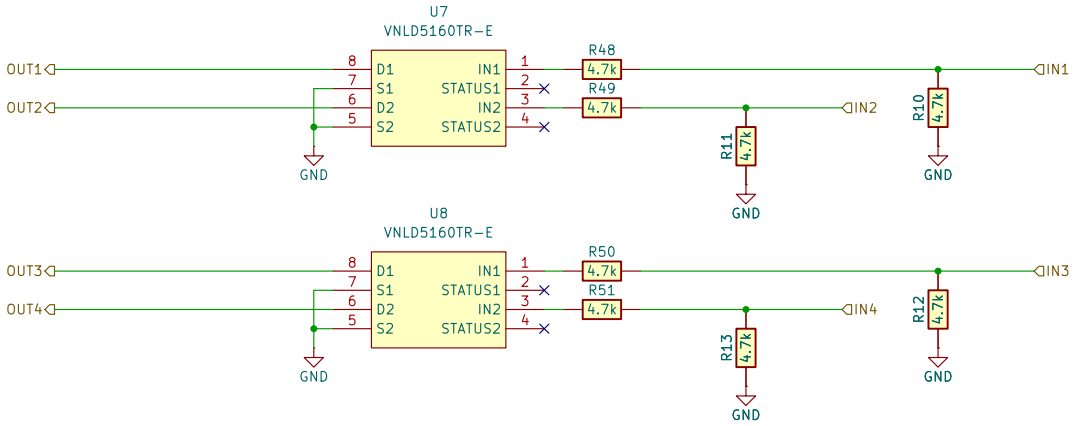


rusEFI.com

Sheet: /LS/
File: LS4.kicad_sch

Title: UAEFI

Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.8		Id: 3/9

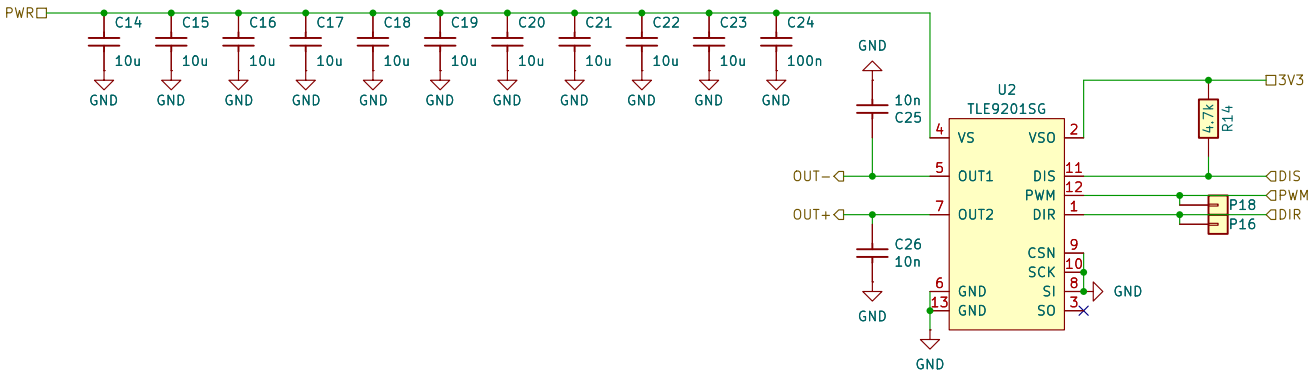


rusEFI.com

Sheet: /DC Driver 2/
File: DC_MOTOR_0.1.kicad_sch

Title: UAEFI

Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.8		Id: 4/9

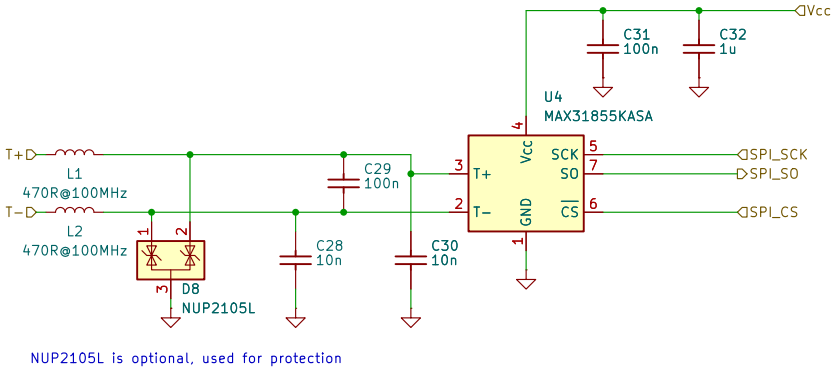


rusEFI.com

Sheet: /EGT/

File: egt.kicad_sch

Title: UAEFI

Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.8		Id: 5/9

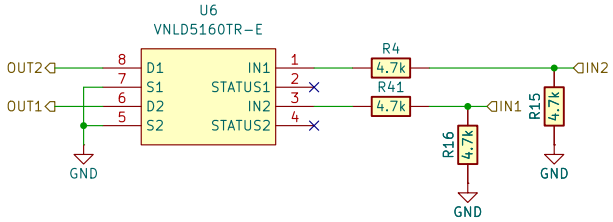


rusEFI.com

Sheet: /LS HOT/
File: LS_HOT.kicad_sch

Title: UAEFI

Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.8		Id: 6/9




rusEFI.com

Sheet: /MAP/
File: MAP.kicad_sch

Title: UAEFI

Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.8		Id: 8/9

Remove R20–R22, R26–R28, and install Q7–Q12 for use with dumb coils

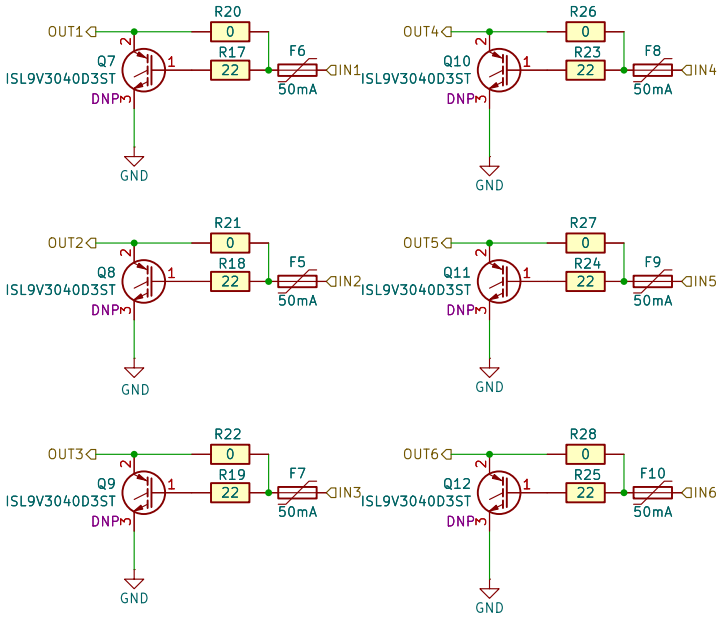


rusEFI.com

Sheet: /Ignition/
File: IGN6.kicad_sch

Title: UAEFI

Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.8		Id: 9/9

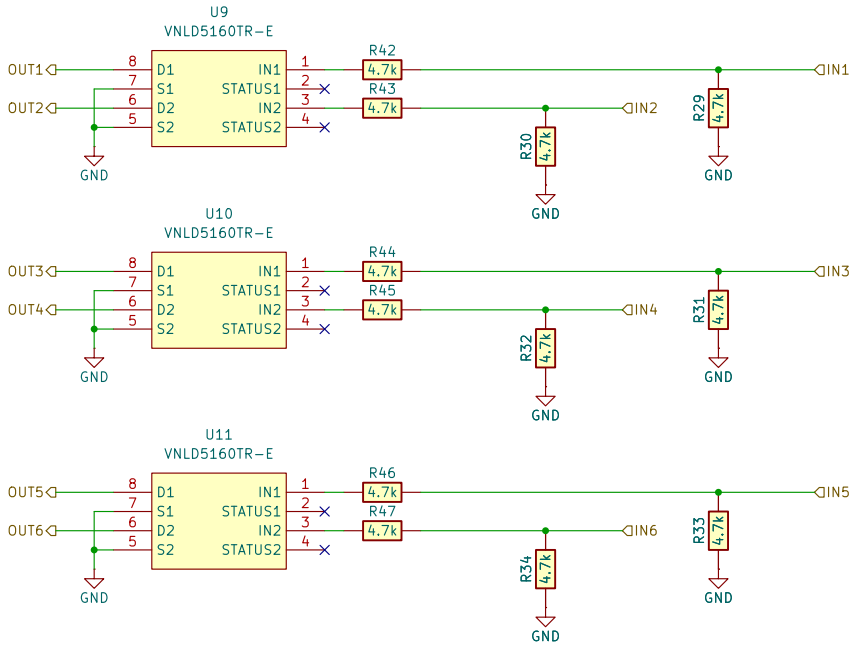

rusEFI.com		
Sheet: /Injector/ File: INJ6.kicad_sch		
Title: UAEFI		
Size: A4	Date: 2026-07-14	**Rev: F3**
KiCad E.D.A. 10.0.8		Id: 10/9