

ART Series

Features


- $\phi 4 \sim \phi 10$, 105°C, 2000 hours assured
- Miniaturized Products (1 size smaller than XT Series)
- Designed for reflow soldering
- Designed for surface mounting on high-density PCB
- RoHS compliant, REACH&SVHC compliant
- AEC-Q200 compliant, Please contact Jarson for more details, test data, information



Marking color: Black


Specifications								
Category temp. range	-55℃ to +105℃							
Capacitance tolerance	±20% (120 Hz / +20 ℃)							
Leakage current	I ≤ 0.01 CV or 3 μA whichever is greater (after 2 minutes)							
Tan δ	Please see the attached characteristics list							
Characteristics at low temperature	Rated voltage (V)	6.3	10	16	25	35	50	Impedance ratio at 120 Hz
	Z (-25 ℃) / Z (+20 ℃)	4	3	2	2	2	2	
	Z (-55 ℃) / Z (+20 ℃)	8	6	4	3	3	3	
Endurance	After applying rated working voltage for 2000 hours at +105 ℃ ± 2 ℃, and then being stabilized at +20 ℃, capacitors shall meet the following limits.							
	Capacitance change	Within ±30% of the initial value						
	Dissipation factor (tan δ)	Less than 300% of the initial value						
	Leakage current	Within the initial limit						
Shelf life	After storage for 1000 h at +105 ℃ ± 2 ℃ with no voltage applied and then being stabilized at +20 ℃, capacitors shall meet the limits specified in endurance.							
Resistance to soldering heat	After reflow soldering and then being stabilized at +20 ℃, capacitors shall meet the following limits.							
	Capacitance change	Within ±10% of the initial value						
	Dissipation factor (tan δ)	Within the initial limit						
	Leakage current	Within the initial limit						
Ripple Current and Frequency Multipliers	Frequency	50Hz	120Hz		1kHz		10kHz≤	
	C ≤ 1000μF	0.7	1.0		1.2		1.3	
	C > 1000μF	0.8	1.0		1.1		1.2	

Dimensions:

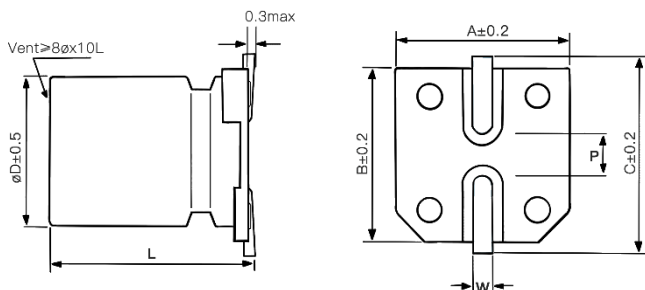

Dimensions						Unit: mm
ϕD	L	A	B	C	W	P±0.2
4	5.7±0.3	4.3	4.3	5.1	0.5~0.8	1.0
5	5.7±0.3	5.3	5.3	6.0	0.5~0.8	1.4
6.3	5.7±0.3	6.6	6.6	7.3	0.5~0.8	2.0
6.3	7.7±0.3	6.6	6.6	7.3	0.5~0.8	2.0
8	10.5±0.5	8.3	8.3	9.1	0.7~1.3	3.1
10	10.5±0.5	10.3	10.3	11.1	0.7~1.3	4.4

Marking:

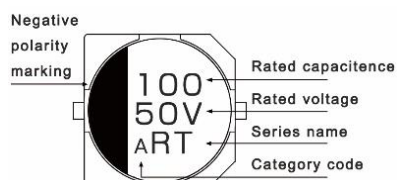

Characteristics list

Rated voltage (V)	Capacitance (±20%) (μF)	Case size		Specification		Part Number③	Taping&Reel
		øD (mm)	L (mm)	Rated ripple current① (mA rms)	tan δ②		MPQ (pcs/reel)
6.3	100	4	5.7	60	0.30	ART0J101M0406	2000
	220	5	5.7	95	0.30	ART0J221M0506	1000
	330	6.3	5.7	180	0.30	ART0J331M0606	1000
	470	6.3	5.7	180	0.30	ART0J471M0606	1000
		6.3	7.7	360	0.30	ART0J471M0607	1000
	680	6.3	7.7	360	0.30	ART0J681M0607	1000
	1500	8	10.5	510	0.34	ART0J152M0810	500
10	2200	10	10.5	710	0.36	ART0J222M1010	500
	68	4	5.7	60	0.26	ART1A680M0406	2000
	150	5	5.7	95	0.26	ART1A151M0506	2000
	220	6.3	5.7	180	0.26	ART1A221M0606	1000
	330	6.3	7.7	360	0.26	ART1A331M0607	1000
	470	6.3	7.7	360	0.26	ART1A471M0607	1000
	1000	8	10.5	510	0.28	ART1A102M0810	500
16	1500	10	10.5	710	0.28	ART1A152M1010	500
	47	4	5.7	60	0.22	ART1C470M0406	2000
	68	5	5.7	95	0.22	ART1C680M0506	1000
	100	5	5.7	95	0.22	ART1C101M0506	1000
	150	6.3	5.7	120	0.22	ART1C151M0606	1000
	220	6.3	5.7	180	0.22	ART1C221M0606	1000
	330	6.3	7.7	360	0.22	ART1C331M0607	1000
	470	6.3	7.7	360	0.22	ART1C471M0607	1000
	680	8	10.5	510	0.24	ART1C681M0810	500
	820	8	10.5	510	0.24	ART1C821M0810	500
	1000	10	10.5	710	0.26	ART1C102M1010	500
25	1200	10	10.5	710	0.26	ART1C122M1010	500
	22	4	5.7	55	0.20	ART1E220M0406	2000
	33	4	5.7	60	0.20	ART1E330M0406	2000
	47	5	5.7	95	0.20	ART1E470M0506	1000
	68	5	5.7	95	0.20	ART1E680M0506	1000
	100	6.3	5.7	120	0.20	ART1E101M0606	1000
	150	6.3	7.7	240	0.20	ART1E151M0607	1000
	220	6.3	7.7	360	0.20	ART1E221M0607	1000
	390	8	10.5	510	0.22	ART1E391M0810	500
	470	8	10.5	510	0.22	ART1E471M0810	500
	560	8	10.5	510	0.22	ART1E561M0810	500
	820	10	10.5	710	0.22	ART1E821M1010	500
35	1000	10	10.5	710	0.24	ART1E102M1010	500
	22	4	5.7	55	0.18	ART1V220M0406	2000
	33	5	5.7	85	0.18	ART1V330M0506	1000
	47	5	5.7	95	0.18	ART1V470M0506	1000
	68	6.3	5.7	120	0.18	ART1V680M0606	1000
	100	6.3	5.7	120	0.18	ART1V101M0606	1000
	150	6.3	7.7	240	0.18	ART1V151M0607	1000
	330	8	10.5	510	0.20	ART1V331M0810	500
	390	8	10.5	510	0.20	ART1V391M0810	500
	470	10	10.5	660	0.20	ART1V471M1010	500
	560	10	10.5	660	0.20	ART1V561M1010	500
	680	10	10.5	710	0.20	ART1V681M1010	500

① Rated ripple current (120Hz / +105℃) ② tan δ (120Hz / +20℃) ※ Please refer to the page of reflow conditions for reflow profile.

Characteristics list

Rated voltage (V)	Capacitance (±20%) (μF)	Case size		Specification		Part Number ^③	Taping&Reel
		øD (mm)	L (mm)	Rated ripple current ^① (mA rms)	tan δ ^②		MPQ (pcs/reel)
50	10	4	5.7	30	0.16	ART1H100M0406	2000
		5	5.7	55	0.16	ART1H100M0506	1000
	22	5	5.7	55	0.16	ART1H220M0506	1000
	47	6.3	5.7	75	0.16	ART1H470M0606	1000
	100	6.3	7.7	140	0.16	ART1H101M0607	1000
	220	8	10.5	400	0.18	ART1H221M0810	500
	330	10	10.5	450	0.18	ART1H331M1010	500

① Rated ripple current (120Hz / +105°C) ② tan δ (120Hz / +20°C) ※ Please refer to the page of reflow conditions for reflow profile.

Part Number System:

SMD E-Cap	ART series	25V	220μF	±20 %	6.3 φ x7.7L	
<u>A</u>	<u>RT</u>	<u>1E</u>	<u>221</u>	<u>M</u>	<u>0607</u>	
Category	Series name	Rated voltage	Capacitance	Tolerance	Case Size	Supplement

③ Note: For more details, please refer to "Part Number System - SMD Type"