

# Specification for HTPA32x31L10/1.0HiM(SPI)[Si]

Rev.0: 2015.10.12 Fg



The HTPA32x31L/\_M(SPI) is a fully calibrated, low cost thermopile array module, with fully digital SPI interface. The module delivers an electrical offset and ambient temperature compensated output stream, which can be already used for image processing, pattern recognition and presence detection purposes. Furthermore, this module type can deliver already an object temperature stream, which is measured by each single element of the matrix.

## Order Code Example

HTPA32x31	L10 / 0.8	F8-14	Hi	M	(SPI)	[Si]
-----------	-----------	-------	----	---	-------	------

### Type:

HTPA32x31

Please contact support for all available HTPA and module combinations.

### Output:

d

HTPA sensor with digital output

Not declared

HTPA sensor with analogous output

### Optics:

L

Focal length: In example L10 = 10.0 mm focal length

/

F-Number: In example /0.8

For optics see also "HTPA standard optics"

### Filter:

F

Filter characteristics. In example F8-14 (µm, Bandpass)

Not declared

Broad band ARC

### Sensitivity:

Hi

Increased sensitivity

Not declared

Standard sensitivity

### Version:

A

Application set: comes with GUI, housing, power supply.

Always UDP Interface.

C

Calibrated sensor (only digital). Carries calibration constants on internal EEPROM

M

Module: HTPA sensor soldered to PCB, calibrated stream

S

HTPA sensor only. Raw voltage output, not calibrated

### Interface:

SPI

SPI device; Three variants:

HTPA82x62: 16bit ADC

all other analogous HTPAs: 14bit ADC

Digital HTPA: 12bit ADC

LC

SPI, Only Analogous HTPA, 12bit ADC

low speed, external processing required

UDP

Ethernet, CAT5 cable connection

PoE

Power over Ethernet, CAT5 connection, UDP protocol

### Lens Material:

Si

Silicon


Not declared

Germanium

For modules, the recommended type is M(SPI). The advantages are the better ADC resolution, wider input voltage range, wider measurement range.

## Pinout

Pin Assignment HTPA32x31M(SPI)			
Pin	Name	Description	Type
1	#MCLR	Master clear, negotiated	Digital Input
2	VDD	Positive supply voltage	Power
3	VSS	Negative supply voltage	Power
4	VSS	Negative supply voltage	Power
5	#SS	Slave select, negotiated	Digital Input
6	SDO	Serial data out of module	Digital output
7	SDI	Serial data in of module	Digital Input
8	SCK	Serial clock	Digital Input
9	MCLK	Master clock, drives Sensor	Digital output
10	#VD	Valid Data, negotiated	Digital output



Connector: B10B-PUDSS-1 (LF)(SN), Supplier: J.S.T.

**HEIMANN Sensor GmbH**  
Maria-Reiche-Str. 1  
D-01109 Dresden / Germany

**Contact / Customer Support**  
Phone 49 (0) 6123 60 50 30  
Fax 49 (0) 6123 60 50 39

**Internet**  
[www.heimannsensor.com](http://www.heimannsensor.com)  
mail: [info@heimannsensor.com](mailto:info@heimannsensor.com)

# Specification for HTPA32x31L10/1.0HiM(SPI)[Si]

Rev.0: 2015.10.12 Fg



## SPI Interface:

**SCK-Frequency:** 350 kHz ... 10 MHz <sup>1)</sup>

<sup>1)</sup> For customer specified devices with higher frame rates than usual, higher SCK-Frequencies than 350 kHz might be needed. See also "Communication and Timings"


## Protocol Specifications:

Data format:	16 data bits
Frame Sync:	None
Module-Selection:	$\overline{SS}$ -Pin
Clock Edge Select:	Serial output data changes on transition from idle to active clock state
SPI Data Input Sample Phase:	Data sampled on transition from active to idle clock state
Clock Polarity:	Idle state is high level, active is low level.

## Electrical Specifications:


VDD Range:	Supply (2.8 – 3.3 V DC)
SPI Transmit/Receive:	TTL
VSS	GND
<b>Power Supply:</b>	<b>2.8-3.3 VDC</b>
IDD (Idle mode)	35 mA
IDD (Operating mode)	65 mA

## HTPA32x31L10/1.0M(SPI) Optical Orientation of Pixels:

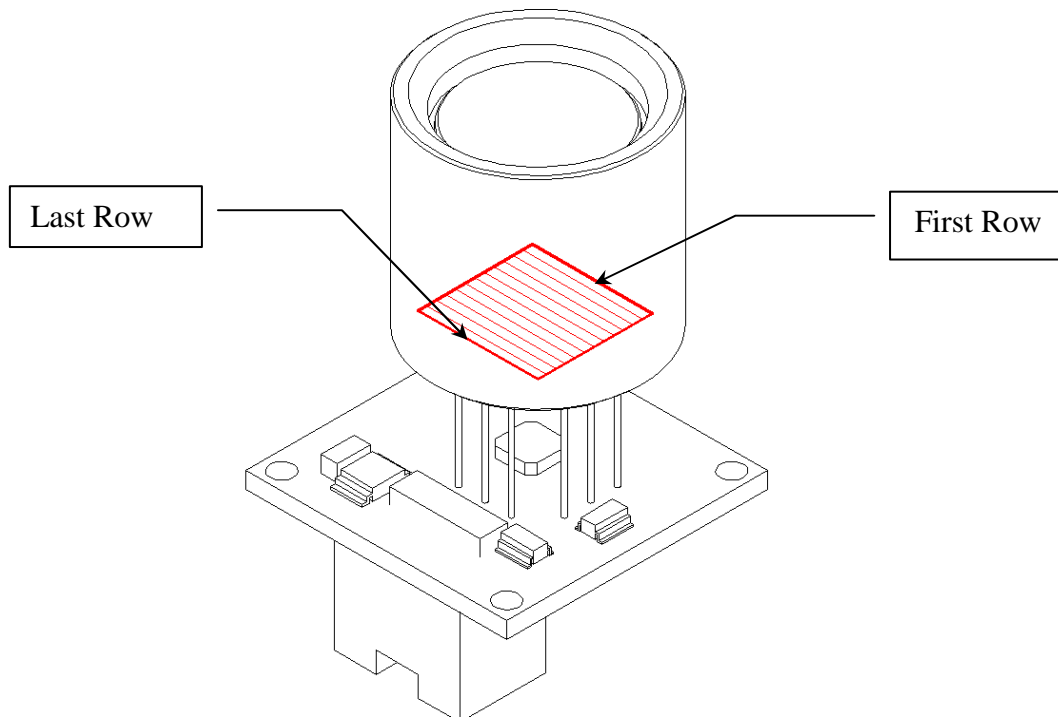


## Electrical Connections:

Single Module:

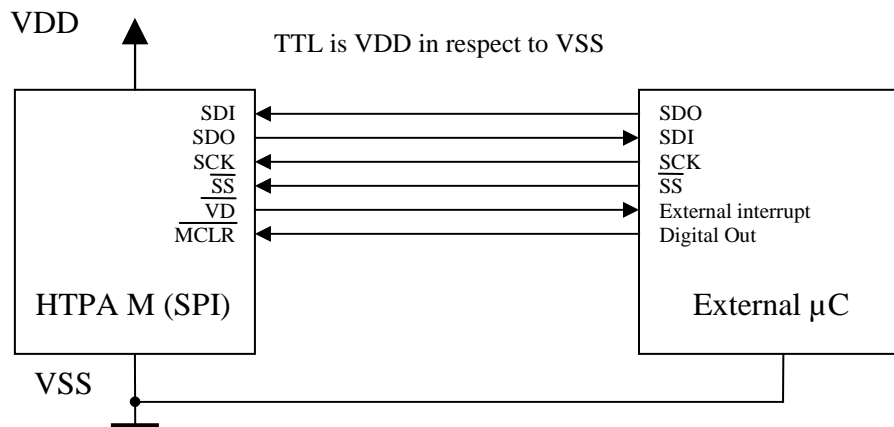


Multiple Modules (preliminary):

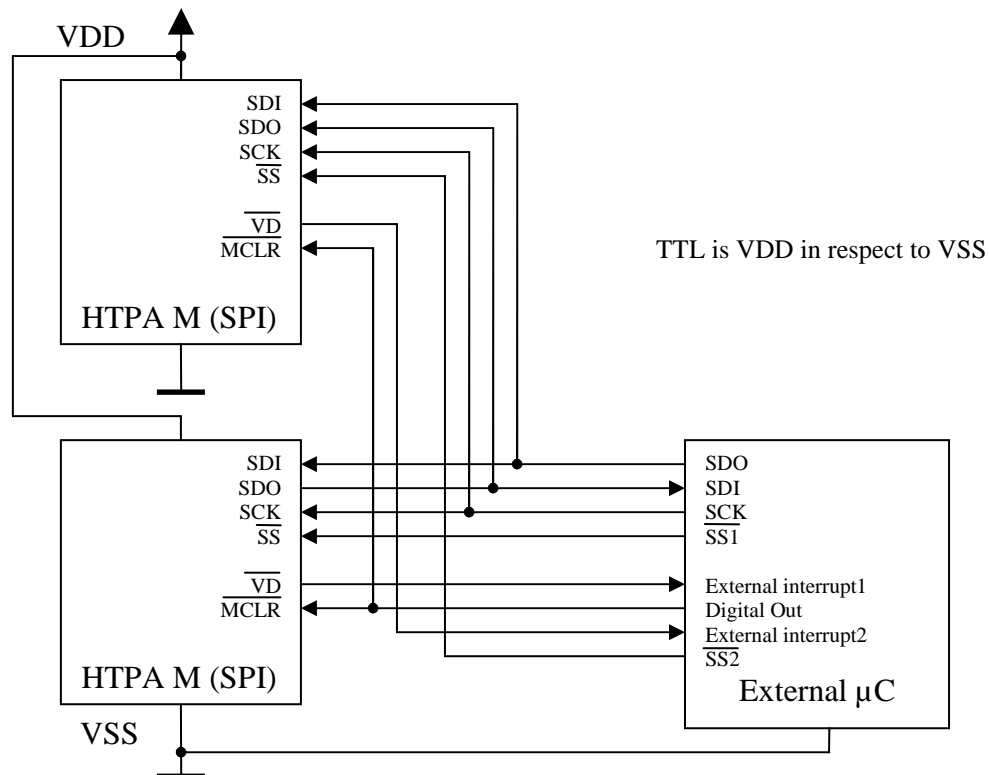


## Communication and Timings:

Proposed flow chart of communication. (Master is referred as  $\mu$ C, Slave as HTPA module)

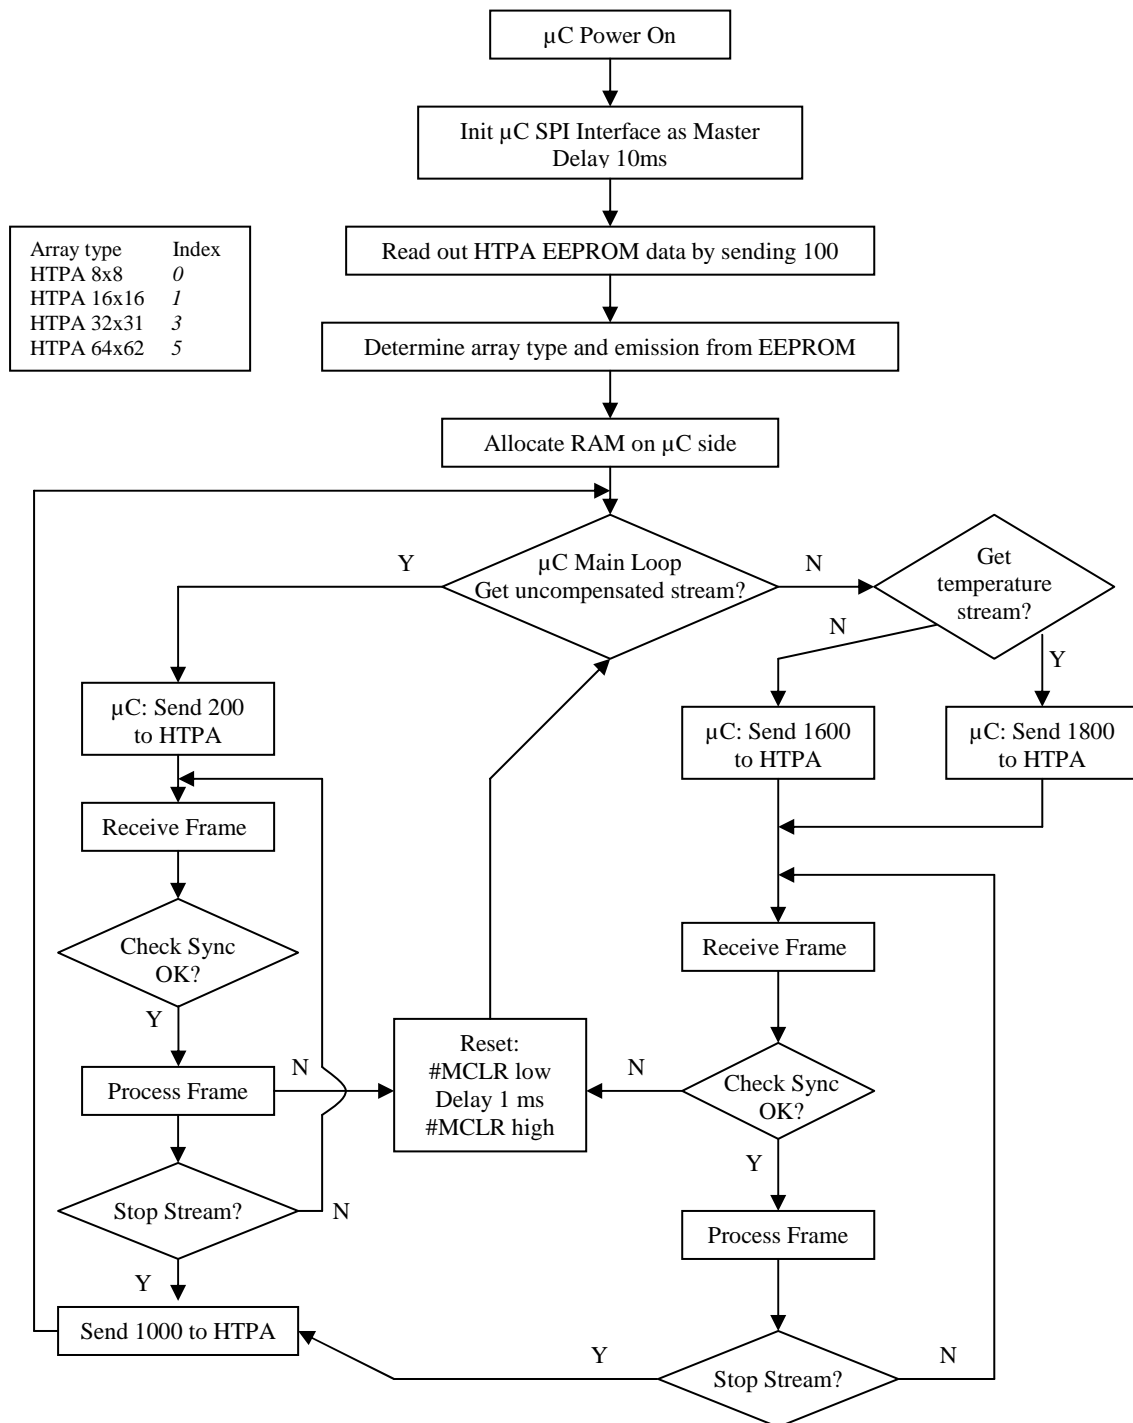

## Communication and Timings:

**Setting emission coefficient epsilon.** (Master is referred as  $\mu$ C, Slave as HTPA module)

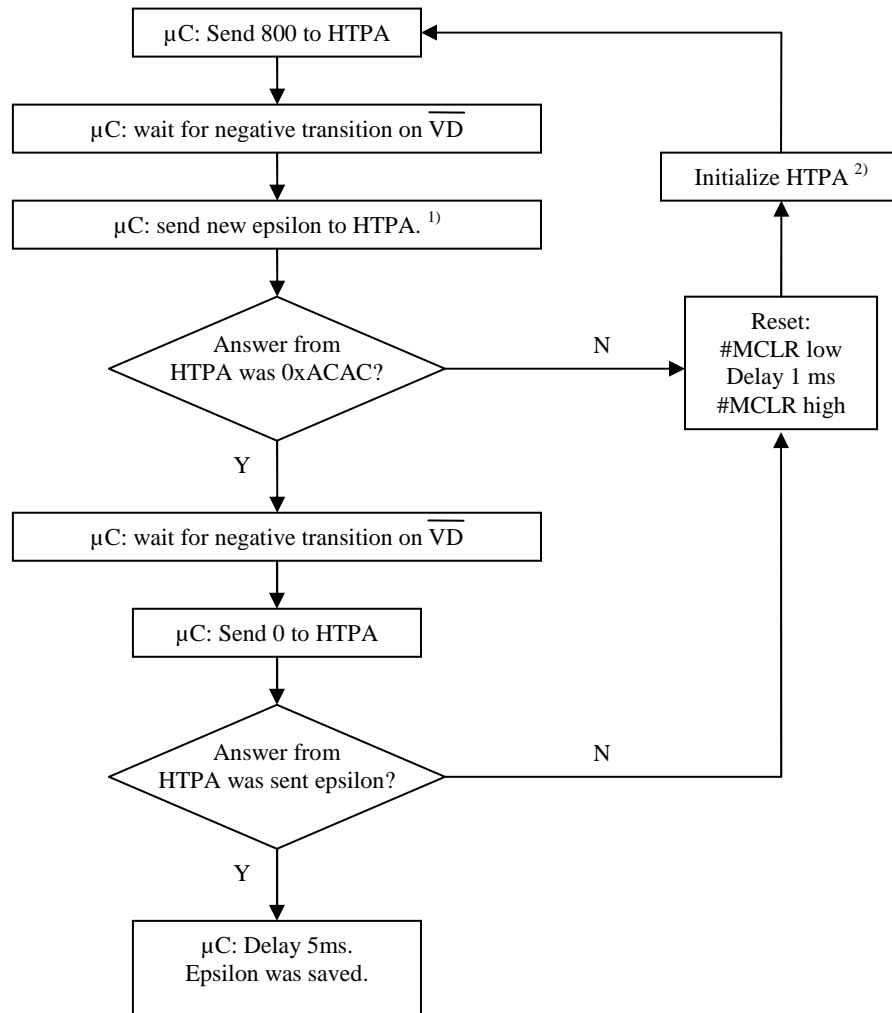


<sup>1)</sup> Epsilon needs to be >0 and <=100. (Decimal)

<sup>2)</sup> See “Proposed flow chart of communication”.


## Communication and Timings (continuation):

### Receive of command:

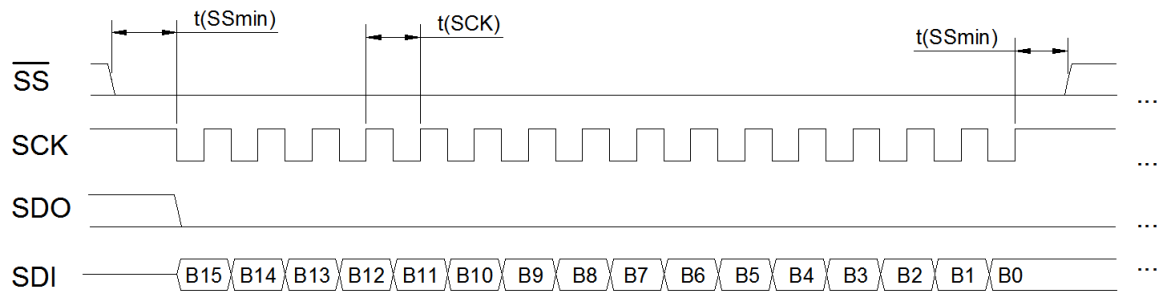


(High state of #SS is not necessary, only for communication with multiple devices)

### Send of EEPROM content:

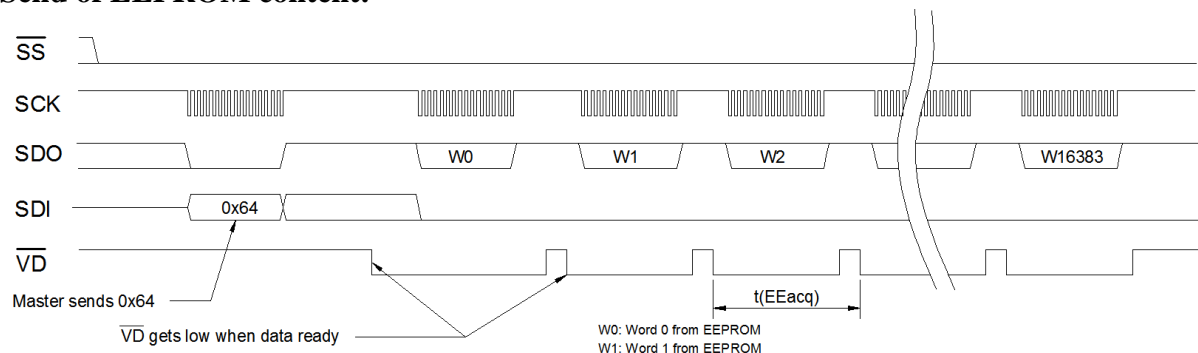


### Pixel data:

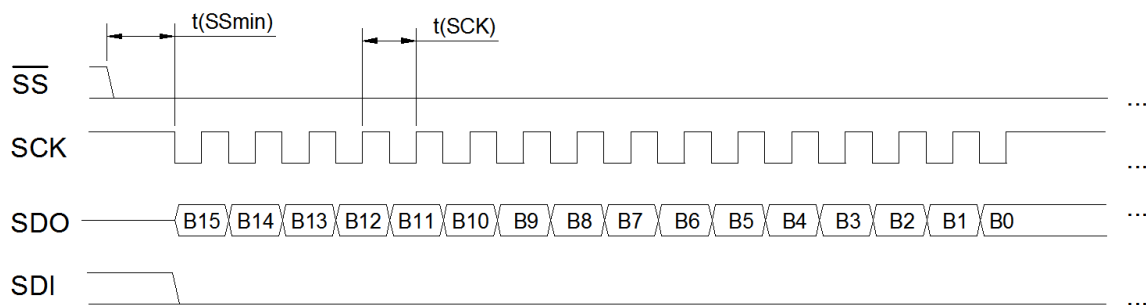

B15...B0: Raw or compensated ADC reading (depending from streaming mode)

### Receive of stream command:

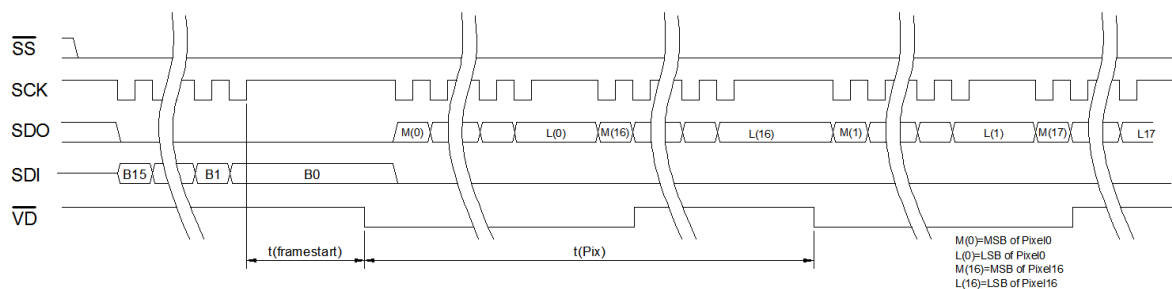

## Communication and Timings (continuation):

Absolute values:

	MIN	NOM	MAX	Unit	Remarks
MCLR pulse width (low)	2			µs	
t(SSmin)	175			ns	
t(SCK)	0.1	1	2.86	µs	1)
t(EEacq)	185			µs	
t(framestart)		120		ms	f(MCLK)=1 MHz
t(Pix)		200		µs	f(MCLK)=1 MHz

1) For customer specified devices with higher frame rates than usual, higher SCK-Frequencies than 350 kHz might be needed.  
See below comment:  $32 \cdot t(SCK) < t(Pix)$

t(Pix) and t(framestart) depend on the given MCLK frequency of the master. t(framestart) also depends on selection of the command. In example:

MCLK frequency is 1003 kHz, then t(Pix) and t(framestart) is calculated via

$t(Pix) = \frac{200}{f(MCLK)} = \frac{200}{1003000} = 199,4 \mu s$	
$t(framestart) = \frac{t(Pix) \cdot 32 \cdot 33}{2} + 14ms = 119,3ms$	Command was 0d200
$t(framestart) = \frac{3 \cdot t(Pix) \cdot 32 \cdot 33}{2} + 14ms = 329,9ms$	Command was 0d1600 or 0d1800

### Important:

The SCK frequency needs to be at least that large, that the 32 bits can be submitted within tPix. Therefore, the following condition must be always true:

$$32 \cdot t(SCK) < t(Pix)$$

## EEPROM Mapping:

### Overview:

Start address	End address	Data type	Value
0x0	0x9	float	Heimann Sensor reserved
0xA	0xA	char	Table number
0x22	0x22	char	Arraytype <sup>1)</sup>
0x23	0x33		Heimann Sensor reserved
0x34	0x37	float	PTATgrad
0x38	0x3B	float	PTAToff
0x3C	0x58		Heimann Sensor reserved
0x46	0x46	unsigned char	Emission coefficient epsilon
0x59	0x5A	unsigned int	MCLK Frequency in kHz
0x5B	0x75		Heimann Sensor reserved
0x76	0x76	unsigned char	Moduletype <sup>2)</sup>
0x80	0x3FFF		Heimann Sensor reserved

<sup>1)</sup> Refer to table Arraytype.

<sup>2)</sup> Shows which sensor and PCB type the current module is. Refer to table "Details for Moduletype" for details.

### Important Note:

unsigned int: 2 byte; float: 4 byte; char: 1 byte

All the values are stored (if larger than one byte) in little endian, the so called „Intel-Format“.

Example for the MCLK-Frequency:

$$MCLK_{LB} = \text{EEPROM}[0x59] \quad MCLK_{HB} = \text{EEPROM}[0x5A]$$

$$MCLK = 256 \cdot MCLK_{HB} + MCLK_{LB}$$

### Details for Moduletype:

Value	Declaration
255	M(LC)
0	M(SPI) + Analogous Chip
1	M(SPI) + Digital Chip
2	M(UDP) + analogous Chip
3	M(PoE) + 16x16d; BCC stored in Flash
4	M(PoE) + 16x16d; BCC stored in Sensor EEPROM

BCC → Binary Calibration Constants

### Arraytype:

Arraytype	Value
HTPA 8x8	0
HTPA 16x16	1
HTPA 32x31	3
HTPA 64x62	5
HTPA 82x62	9



## Serial order of data in stream:

Compensated Voltage Mode	
Dataset	Value
0	offset corrected Voltage of Pixel0 in digits
1	offset corrected Voltage of Pixel16 in digits
2	offset corrected Voltage of Pixel1 in digits
3	offset corrected Voltage of Pixel17 in digits
...	...
30	offset corrected Voltage of Pixel15 in digits
31	offset corrected Voltage of Pixel31 in digits
32	offset corrected Voltage of Pixel32 in digits
33	offset corrected Voltage of Pixel48 in digits
...	...
991	offset corrected Voltage of Pixel991 in digits
992	eIOff0 in digits
993	eIOff16 in digits
994	eIOff1 in digits
995	eIOff17 in digits
...	...
1022	eIOff15 in digits
1023	eIOff31 in digits
1024	Module transmitts 0x789A (use for sync)
1025	Module transmitts 0xBCDE (use for sync)
1026	Tamb
1027	no value, ignore
1028	no value, ignore
1029	no value, ignore
...	...
1039	no value, ignore
1040	PTAT0 in digits
1041	no value, ignore
1042	PTAT1 in digits
...	...
1053	no value, ignore
1054	PTAT7 in digits
1055	no value, ignore

Raw Voltage Mode	
Dataset	Value
0	absolute Voltage of Pixel0 in digits
1	absolute Voltage of Pixel16 in digits
2	absolute Voltage of Pixel1 in digits
3	absolute Voltage of Pixel17 in digits
...	...
30	absolute Voltage of Pixel15 in digits
31	absolute Voltage of Pixel31 in digits
32	absolute Voltage of Pixel32 in digits
33	absolute Voltage of Pixel48 in digits
...	...
991	absolute Voltage of Pixel991 in digits
992	eIOff0 in digits
993	eIOff16 in digits
994	eIOff1 in digits
995	eIOff17 in digits
...	...
1022	eIOff15 in digits
1023	eIOff31 in digits
1024	Module transmitts 0x789A (use for sync)
1025	Module transmitts 0xBCDE (use for sync)
1026	no value, ignore
1027	no value, ignore
1028	no value, ignore
1029	no value, ignore
...	...
1039	no value, ignore
1040	PTAT0 in digits
1041	no value, ignore
1042	PTAT1 in digits
...	...
1053	no value, ignore
1054	PTAT7 in digits
1055	no value, ignore

Temperature Mode	
Dataset	Value
0	Object temp. at Pixel0 in dK
1	Object temp. at Pixel16 in dK
2	Object temp. at Pixel1 in dK
3	Object temp. at Pixel17 in dK
...	...
30	Object temp. at Pixel15 in dK
31	Object temp. at Pixel31 in dK
32	Object temp. at Pixel32 in dK
33	Object temp. at Pixel48 in dK
...	...
991	Object temp. at Pixel991 in dK
992	eIOff0 in digits
993	eIOff16 in digits
994	eIOff1 in digits
995	eIOff17 in digits
...	...
1022	eIOff15 in digits
1023	eIOff31 in digits
1024	Module transmitts 0x789A (use for sync)
1025	Module transmitts 0xBCDE (use for sync)
1026	Tamb
1027	no value, ignore
1028	no value, ignore
1029	no value, ignore
...	...
1039	no value, ignore
1040	PTAT0 in digits
1041	no value, ignore
1042	PTAT1 in digits
...	...
1053	no value, ignore
1054	PTAT7 in digits
1055	no value, ignore

Each dataset consists of a 16 bit value. The 16 bit values are transmitted with MSB first. In case of compensated voltage mode a signed 16 bit value is transmitted, in case of raw voltage or temperature mode an unsigned 16 bit value. Signed values are always in 2's complement.

# Specification for HTPA32x31L10/1.0HiM(SPI)[Si]

Rev.0: 2015.10.12 Fg



## Pixel Map:

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63
64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95
96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127
128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159
160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191
192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223
224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255
256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287
288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319
320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351
352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383
384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415
416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447
448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479
480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511
512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543
544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575
576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607
608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639
640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671
672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703
704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735
736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767
768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799
800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831
832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863
864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895
896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927
928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959
960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991

C-Code for all these calculations can be found in our SDK (Software Development Kit). Furthermore, the SDK is able to fetch the data from the module and sends it to our GUI (Graphical User Interface) which can visualize the data, records videos and text files and has many additional features. For more information see [www.heimannsensor.com](http://www.heimannsensor.com).

**HEIMANN Sensor GmbH**  
Maria-Reiche-Str. 1  
D-01109 Dresden / Germany

**Contact / Customer Support**  
Phone 49 (0) 6123 60 50 30  
Fax 49 (0) 6123 60 50 39

**Internet**  
[www.heimannsensor.com](http://www.heimannsensor.com)  
mail: [info@heimannsensor.com](mailto:info@heimannsensor.com)

## Communication commands:

Sent Command	Answer / Result
0d100	Output of EEPROM content. Data ready of each 2 bytes is signified by #VD pin.
0d200	Module streams out uncompensated, raw data stream. Data ready of each 4 bytes is signified by #VD pin.
0d700	Device goes in IDLE mode.
0d1000	Stops streaming mode of module.
0d1600	Module streams offset corrected stream (electrical and thermal). Data ready of each 4 bytes is signified by #VD pin.
0d1800	Module streams temperature stream in deci-Kelvin. Data ready of each 4 bytes is signified by #VD pin

## Precondition for all streaming modes:

VDD must be in the given limits.

## Absolute Maximum Ratings:


Value	MIN	NOM	MAX	Unit	Remarks
VDD in respect to VSS	-0.3	3	4	V	
VDD in streaming mode	2.8	3	3.3	V	False VDD values affect compensation
Voltage on digital pin with respect to VSS	-0.3		VDD+0.3	V	
Storage temperature	-40		120	°C	
ADC reference voltages	VSS		4.096	V	high precision references
ADC resolution		14		bit	4dig/mV
Max. current sunk/sourced on any pin		20		mA	
Operating temperature	-20		60	°C	non-condensing
Current consumption		65		mA	In streaming
Current consumption		35		mA	Idle

# Specification for HTPA32x31L10/1.0HiM(SPI)[Si]

Rev.0: 2015.10.12 Fg



## Dimensions:

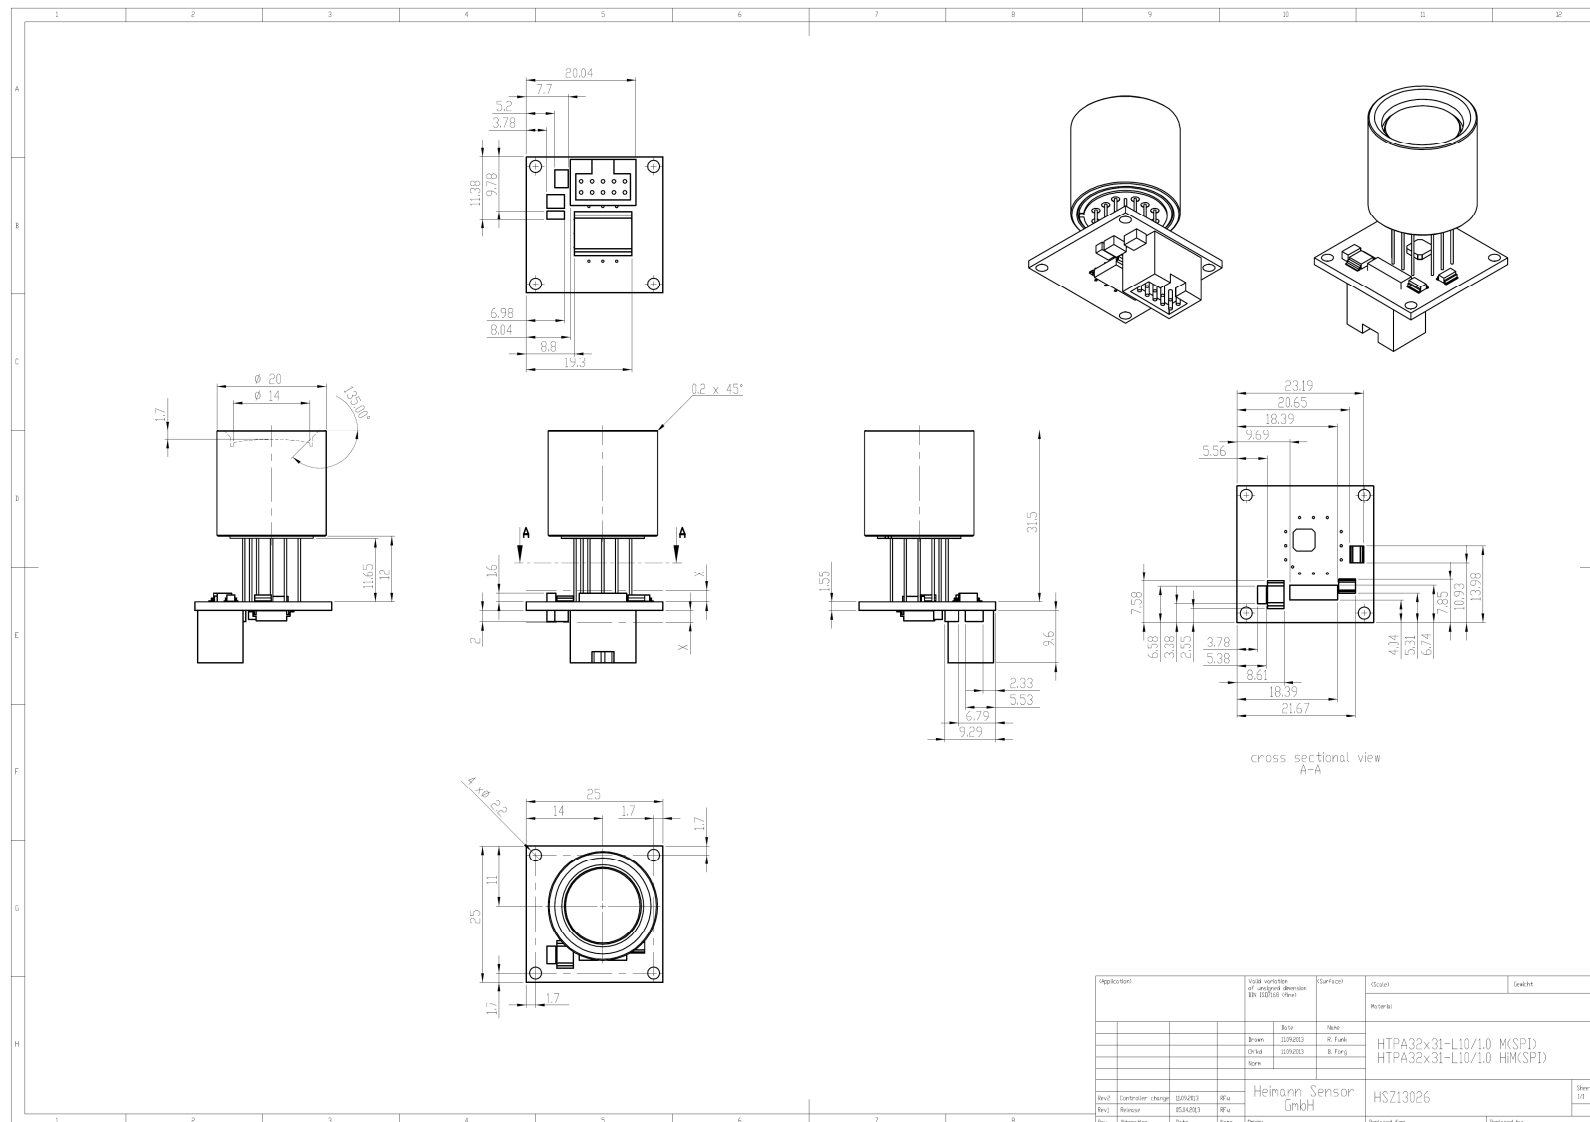

Application	Valid version of ordered document (M, D, S, E, F, G, H)	Surface	Color	Weight
		Color	Material	
		Brown	HTPA32x31-L10/1.0 MCSPD	
		Black	HTPA32x31-L10/1.0 HiM(SPI)	
		None		
Rev.	Control change	01/2013	HTPA	HSZ13026
Rev.	Revision	02/2013	HTPA	
Rev.	Alteration	03/2013	HTPA	
Rev.	Alteration	04/2013	HTPA	
Rev.	Alteration	05/2013	HTPA	
Rev.	Alteration	06/2013	HTPA	
Rev.	Alteration	07/2013	HTPA	
Rev.	Alteration	08/2013	HTPA	
Rev.	Alteration	09/2013	HTPA	
Rev.	Alteration	10/2013	HTPA	
Rev.	Alteration	11/2013	HTPA	
Rev.	Alteration	12/2013	HTPA	
Rev.	Alteration	01/2014	HTPA	
Rev.	Alteration	02/2014	HTPA	
Rev.	Alteration	03/2014	HTPA	
Rev.	Alteration	04/2014	HTPA	
Rev.	Alteration	05/2014	HTPA	
Rev.	Alteration	06/2014	HTPA	
Rev.	Alteration	07/2014	HTPA	
Rev.	Alteration	08/2014	HTPA	
Rev.	Alteration	09/2014	HTPA	
Rev.	Alteration	10/2014	HTPA	
Rev.	Alteration	11/2014	HTPA	
Rev.	Alteration	12/2014	HTPA	
Rev.	Alteration	01/2015	HTPA	
Rev.	Alteration	02/2015	HTPA	
Rev.	Alteration	03/2015	HTPA	
Rev.	Alteration	04/2015	HTPA	
Rev.	Alteration	05/2015	HTPA	
Rev.	Alteration	06/2015	HTPA	
Rev.	Alteration	07/2015	HTPA	
Rev.	Alteration	08/2015	HTPA	
Rev.	Alteration	09/2015	HTPA	
Rev.	Alteration	10/2015	HTPA	
Rev.	Alteration	11/2015	HTPA	
Rev.	Alteration	12/2015	HTPA	
Rev.	Alteration	01/2016	HTPA	
Rev.	Alteration	02/2016	HTPA	
Rev.	Alteration	03/2016	HTPA	
Rev.	Alteration	04/2016	HTPA	
Rev.	Alteration	05/2016	HTPA	
Rev.	Alteration	06/2016	HTPA	
Rev.	Alteration	07/2016	HTPA	
Rev.	Alteration	08/2016	HTPA	
Rev.	Alteration	09/2016	HTPA	
Rev.	Alteration	10/2016	HTPA	
Rev.	Alteration	11/2016	HTPA	
Rev.	Alteration	12/2016	HTPA	
Rev.	Alteration	01/2017	HTPA	
Rev.	Alteration	02/2017	HTPA	
Rev.	Alteration	03/2017	HTPA	
Rev.	Alteration	04/2017	HTPA	
Rev.	Alteration	05/2017	HTPA	
Rev.	Alteration	06/2017	HTPA	
Rev.	Alteration	07/2017	HTPA	
Rev.	Alteration	08/2017	HTPA	
Rev.	Alteration	09/2017	HTPA	
Rev.	Alteration	10/2017	HTPA	
Rev.	Alteration	11/2017	HTPA	
Rev.	Alteration	12/2017	HTPA	
Rev.	Alteration	01/2018	HTPA	
Rev.	Alteration	02/2018	HTPA	
Rev.	Alteration	03/2018	HTPA	
Rev.	Alteration	04/2018	HTPA	
Rev.	Alteration	05/2018	HTPA	
Rev.	Alteration	06/2018	HTPA	
Rev.	Alteration	07/2018	HTPA	
Rev.	Alteration	08/2018	HTPA	
Rev.	Alteration	09/2018	HTPA	
Rev.	Alteration	10/2018	HTPA	
Rev.	Alteration	11/2018	HTPA	
Rev.	Alteration	12/2018	HTPA	
Rev.	Alteration	01/2019	HTPA	
Rev.	Alteration	02/2019	HTPA	
Rev.	Alteration	03/2019	HTPA	
Rev.	Alteration	04/2019	HTPA	
Rev.	Alteration	05/2019	HTPA	
Rev.	Alteration	06/2019	HTPA	
Rev.	Alteration	07/2019	HTPA	
Rev.	Alteration	08/2019	HTPA	
Rev.	Alteration	09/2019	HTPA	
Rev.	Alteration	10/2019	HTPA	
Rev.	Alteration	11/2019	HTPA	
Rev.	Alteration	12/2019	HTPA	
Rev.	Alteration	01/2020	HTPA	
Rev.	Alteration	02/2020	HTPA	
Rev.	Alteration	03/2020	HTPA	
Rev.	Alteration	04/2020	HTPA	
Rev.	Alteration	05/2020	HTPA	
Rev.	Alteration	06/2020	HTPA	
Rev.	Alteration	07/2020	HTPA	
Rev.	Alteration	08/2020	HTPA	
Rev.	Alteration	09/2020	HTPA	
Rev.	Alteration	10/2020	HTPA	
Rev.	Alteration	11/2020	HTPA	
Rev.	Alteration	12/2020	HTPA	
Rev.	Alteration	01/2021	HTPA	
Rev.	Alteration	02/2021	HTPA	
Rev.	Alteration	03/2021	HTPA	
Rev.	Alteration	04/2021	HTPA	
Rev.	Alteration	05/2021	HTPA	
Rev.	Alteration	06/2021	HTPA	
Rev.	Alteration	07/2021	HTPA	
Rev.	Alteration	08/2021	HTPA	
Rev.	Alteration	09/2021	HTPA	
Rev.	Alteration	10/2021	HTPA	
Rev.	Alteration	11/2021	HTPA	
Rev.	Alteration	12/2021	HTPA	
Rev.	Alteration	01/2022	HTPA	
Rev.	Alteration	02/2022	HTPA	
Rev.	Alteration	03/2022	HTPA	
Rev.	Alteration	04/2022	HTPA	
Rev.	Alteration	05/2022	HTPA	
Rev.	Alteration	06/2022	HTPA	
Rev.	Alteration	07/2022	HTPA	
Rev.	Alteration	08/2022	HTPA	
Rev.	Alteration	09/2022	HTPA	
Rev.	Alteration	10/2022	HTPA	
Rev.	Alteration	11/2022	HTPA	
Rev.	Alteration	12/2022	HTPA	
Rev.	Alteration	01/2023	HTPA	
Rev.	Alteration	02/2023	HTPA	
Rev.	Alteration	03/2023	HTPA	
Rev.	Alteration	04/2023	HTPA	
Rev.	Alteration	05/2023	HTPA	
Rev.	Alteration	06/2023	HTPA	
Rev.	Alteration	07/2023	HTPA	
Rev.	Alteration	08/2023	HTPA	
Rev.	Alteration	09/2023	HTPA	
Rev.	Alteration	10/2023	HTPA	
Rev.	Alteration	11/2023	HTPA	
Rev.	Alteration	12/2023	HTPA	
Rev.	Alteration	01/2024	HTPA	
Rev.	Alteration	02/2024	HTPA	
Rev.	Alteration	03/2024	HTPA	
Rev.	Alteration	04/2024	HTPA	
Rev.	Alteration	05/2024	HTPA	
Rev.	Alteration	06/2024	HTPA	
Rev.	Alteration	07/2024	HTPA	
Rev.	Alteration	08/2024	HTPA	
Rev.	Alteration	09/2024	HTPA	
Rev.	Alteration	10/2024	HTPA	
Rev.	Alteration	11/2024	HTPA	
Rev.	Alteration	12/2024	HTPA	
Rev.	Alteration	01/2025	HTPA	
Rev.	Alteration	02/2025	HTPA	
Rev.	Alteration	03/2025	HTPA	
Rev.	Alteration	04/2025	HTPA	
Rev.	Alteration	05/2025	HTPA	
Rev.	Alteration	06/2025	HTPA	
Rev.	Alteration	07/2025	HTPA	
Rev.	Alteration	08/2025	HTPA	
Rev.	Alteration	09/2025	HTPA	
Rev.	Alteration	10/2025	HTPA	
Rev.	Alteration	11/2025	HTPA	
Rev.	Alteration	12/2025	HTPA	
Rev.	Alteration	01/2026	HTPA	
Rev.	Alteration	02/2026	HTPA	
Rev.	Alteration	03/2026	HTPA	
Rev.	Alteration	04/2026	HTPA	
Rev.	Alteration	05/2026	HTPA	
Rev.	Alteration	06/2026	HTPA	
Rev.	Alteration	07/2026	HTPA	
Rev.	Alteration	08/2026	HTPA	
Rev.	Alteration	09/2026	HTPA	
Rev.	Alteration	10/2026	HTPA	
Rev.	Alteration	11/2026	HTPA	
Rev.	Alteration	12/2026	HTPA	
Rev.	Alteration	01/2027	HTPA	
Rev.	Alteration	02/2027	HTPA	
Rev.	Alteration	03/2027	HTPA	
Rev.	Alteration	04/2027	HTPA	
Rev.	Alteration	05/2027	HTPA	
Rev.	Alteration	06/2027	HTPA	
Rev.	Alteration	07/2027	HTPA	
Rev.	Alteration	08/2027	HTPA	
Rev.	Alteration	09/2027	HTPA	
Rev.	Alteration	10/2027	HTPA	
Rev.	Alteration	11/2027	HTPA	
Rev.	Alteration	12/2027	HTPA	
Rev.	Alteration	01/2028	HTPA	
Rev.	Alteration	02/2028	HTPA	
Rev.	Alteration	03/2028	HTPA	
Rev.	Alteration	04/2028	HTPA	
Rev.	Alteration	05/2028	HTPA	
Rev.	Alteration	06/2028	HTPA	
Rev.	Alteration	07/2028	HTPA	
Rev.	Alteration	08/2028	HTPA	
Rev.	Alteration	09/2028	HTPA	
Rev.	Alteration	10/2028	HTPA	
Rev.	Alteration	11/2028	HTPA	
Rev.	Alteration	12/2028	HTPA	
Rev.	Alteration	01/2029	HTPA	
Rev.	Alteration	02/2029	HTPA	
Rev.	Alteration	03/2029	HTPA	
Rev.	Alteration	04/2029	HTPA	
Rev.	Alteration	05/2029	HTPA	
Rev.	Alteration	06/2029	HTPA	
Rev.	Alteration	07/2029	HTPA	
Rev.	Alteration	08/2029	HTPA	
Rev.	Alteration	09/2029	HTPA	
Rev.	Alteration	10/2029	HTPA	
Rev.	Alteration	11/2029	HTPA	
Rev.	Alteration	12/2029	HTPA	
Rev.	Alteration	01/2030	HTPA	
Rev.	Alteration	02/2030	HTPA	
Rev.	Alteration	03/2030	HTPA	
Rev.	Alteration	04/2030	HTPA	
Rev.	Alteration	05/2030	HTPA	
Rev.	Alteration	06/2030	HTPA	
Rev.	Alteration	07/2030	HTPA	
Rev.	Alteration	08/2030	HTPA	
Rev.	Alteration	09/2030	HTPA	
Rev.	Alteration	10/2030	HTPA	
Rev.	Alteration	11/2030	HTPA	
Rev.	Alteration	12/2030	HTPA	

**HEIMANN Sensor GmbH**  
Maria-Reiche-Str. 1  
D-01109 Dresden / Germany

**Contact / Customer Support**  
Phone 49 (0) 6123 60 50 30  
Fax 49 (0) 6123 60 50 39

**Internet**  
[www.heimannsensor.com](http://www.heimannsensor.com)  
mail: [info@heimannsensor.com](mailto:info@heimannsensor.com)