
Fluid Losses and Hydration Status of Industrial Workers under Thermal Stress Working Extended Shifts

Author(s): D. J. Brake and G. P. Bates

Source: *Occupational and Environmental Medicine*, Feb., 2003, Vol. 60, No. 2 (Feb., 2003), pp. 90-96

Published by: BMJ

Stable URL: <https://www.jstor.org/stable/27731866>

JSTOR is a not-for-profit service that helps scholars, researchers, and students discover, use, and build upon a wide range of content in a trusted digital archive. We use information technology and tools to increase productivity and facilitate new forms of scholarship. For more information about JSTOR, please contact support@jstor.org.

Your use of the JSTOR archive indicates your acceptance of the Terms & Conditions of Use, available at <https://about.jstor.org/terms>



BMJ is collaborating with JSTOR to digitize, preserve and extend access to *Occupational and Environmental Medicine*

JSTOR

ORIGINAL ARTICLE

Fluid losses and hydration status of industrial workers under thermal stress working extended shifts

D J Brake, G P Bates

Occup Environ Med 2003;60:90-96

Aims: To assess whether workers under significant thermal stress necessarily dehydrated during their exposure and whether "involuntary dehydration" was inevitable, as supported by ISO 9866 and other authorities. Other objectives were to quantify sweat rates against recommended occupational limits, to develop a dehydration protocol to assist with managing heat exposures, and to understand the role of meal breaks on extended shifts in terms of fluid replacement.

Methods: A field investigation to examine the fluid consumption, sweat rates, and changes in the hydration state of industrial workers on extended (10, 12, and 12.5 hour) shifts under significant levels of thermal stress (wet bulb globe temperature (WBGT) >28°C) was conducted on 39 male underground miners. Urinary specific gravity was measured before, during, and at the completion of the working shift. Environmental conditions were measured hourly during the shift. Fluid replacement was measured during the working periods and during the meal breaks.

Results: Average environmental conditions were severe (WBGT 30.9°C (SD 2.0°C), range 25.7-35.2°C). Fluid intake averaged 0.8 l/h during exposure (SD 0.3 l/h, range 0.3-1.5 l/h). Average urinary specific gravity at start, mid, and end of shift was 1.0251, 1.0248, and 1.0254 respectively; the differences between start and mid shift, mid and end shift, and start and end shift were not significant. However, a majority of workers were coming to work in a moderately hypohydrated state (average urinary specific gravity 1.024 (SD 0.0059)). A combined dehydration and heat illness protocol was developed. Urinary specific gravity limits of 1.022 for start of shift and 1.030 for end of shift were selected; workers exceeding these values were not allowed into the workplace (if the start of shift limit was exceeded) or were retested prior to their next working shift (if the end of shift limit was exceeded). A target of 1.015 as a euhydrated state for start of shift was adopted for workforce education.

Conclusions: This study found that "involuntary dehydration" did not occur in well informed workers, which has implications for heat stress standards that do not make provision for full fluid replacement during heat exposure. Fluid replacement during meal breaks was not significantly increased above fluid replacement rates during work time, with implications for the duration and spacing of meal breaks on long shifts. Testing of urinary specific gravity was found to be a good indication of hydration status and a practical method of improving workforce awareness and understanding of this important risk factor. Approximately 10 000 dehydration tests have been conducted under the dehydration protocol in a workforce of 2000 persons exposed to thermal stress and has proved practical and reliable.

See end of article for authors' affiliations
Correspondence to: Dr D J Brake, 12 Flinders Parade, Sandgate, QLD 4017, Australia; rick.brake@mvaust.com.au
Accepted 10 April 2002

This study reports a field investigation to examine the hydration status and fluid replacement in industrial shift-workers. All subjects were miners employed in the hottest of four deep, underground mines located within 20 km of each other well inside the tropics in northern Australia. The workers were all on 10, 12, or 12.5 hour shifts. The climatic profile¹ for the city in which these workers live consists of near maximum summer temperatures of 41.5°C dry bulb (DB) and 25°C wet bulb (WB). The near minimum winter temperature is 3.5°C DB.

The objectives of the study were:

- To determine whether workers became dehydrated during their shift
- To measure fluid consumption during the working shift
- To estimate sweat rates during the working shift, and assess these against currently published occupational limits
- To examine the role of the meal break in overall fluid replacement during the working shift.

The target group within the workforce were those workers most exposed to severe thermal environmental conditions. They are acclimatised and work hardened and are generally well informed about the importance of drinking water. A per-

sonal 4 litre water bottle is a compulsory component of their PPE (personal protective equipment). The employer at this operation provides low joule cordial essence (flavouring) at no cost, and some workers add this to their drinking water. All subjects in the study were drawn from the target group.

Approximately 2000 persons work underground at these mines providing a 24 hour, 363 day coverage. As the underground workplaces are widely dispersed, workers are typically visited by their supervisor twice per shift for approximately 10 minutes per visit.

In addition to the heat and humidity in the environment, these workers must cope with poor illumination, dust, noise, and broken ground. Compulsory mine workers' uniforms consist of long cotton trousers and short or long sleeved shirts, safety boots, safety helmet, eye protection, heavy safety belt, cap lamp, and cap lamp battery. Where the environment is dusty or noisy, a face respirator or noise protection must also be worn. Some activities involve cement grout or other

Abbreviations: DB, dry bulb; P₄SR, predicted four hour sweat rate; TWL, thermal work limit; WB, wet bulb; WBGT, wet bulb globe temperature

chemical agents, and these require wearing elbow length impermeable gloves, a rubber apron, and a visor clipped to the safety helmet. However, the workforce is highly mobile, and some work is conducted from within air conditioned cabins of mobile equipment. Not all work was in extreme conditions or was physically strenuous. Lunch breaks are all taken in air conditioned underground lunchrooms.

As these workplaces are at a depth of between 1000 m and 1800 m below surface, there is no significant change in temperatures in the workplace between day and night because of the thermal damping that occurs in the long intake airways between the surface and the workplace. Furthermore, autocompression (the increase in air temperature as it descends a shaft due solely to conversion of potential energy into heat) adds about 6°C DB and 4°C WB per 1000 m of vertical depth.² This temperature increase, along with the diminished effects of changing surface seasons because of the distance to the workplace, means that exposures to increased levels of heat stress occur throughout the year, although they are less frequent and less extreme in winter. An analysis of the incidence of heat illness with respect to surface temperatures at this operation has recently been completed.³

Dehydration is known to produce a wide range of physical, mental, and psychological decrements in performance,⁴⁻⁹ and has been implicated in 50% of all heat stroke cases in South African miners.¹⁰ Therefore the ability of industrial workers to replace fluid lost in sweat is crucial when designing protocols for working in heat, and particularly in the design of protocols for extended shifts.

In this regard, there is disagreement in the literature about acceptable sweat rates for industrial workers. While sweat rates of 1.5–2.5 l/h have been shown over short periods (with peaks of 3 l/h),^{11,12} acceptable figures for a working shift are generally considered to be lower. ISO 7933¹³ and Belding and Hatch¹⁴ advocate a limit of 1.04 and 1.0 l/h respectively for acclimatised persons, although ISO 9886¹⁵ curiously states that “There is no limit applicable concerning the maximum sweat rate: the values ... adopted in ISO 7933 ... must be considered not as maximum values but rather as minimal values that can be exceeded by most subjects in good physical conditions”. Nunneley¹⁶ reports that humans can sweat indefinitely at rates of 1.5–2.0 l/h, while McArdle and colleagues¹⁷ recommended a limit of 4.5 l over four hours. This relatively wide range of acceptable sweat rates is in part related to the wide range of views on acceptable skin wettedness, with ISO 7933 accepting a fully wet skin (1.0 wettedness) for acclimatised workers over extended periods, but Azer¹⁸ recommending a maximum skin wettedness of 0.5 for similar, fully acclimatised persons. A much higher sweat rate is required to maintain a fully wet skin than a 50% wet skin.^{13,19}

Various authors have found that fluid replacement when under thermal stress is only half to two thirds of the fluid loss.^{4,10,20} This observation has subsequently been endorsed as an unavoidable water deficit in thermal stress standards such as ISO 7933 (which does not provide for a fluid replacement term in its formulation). It therefore has a major impact on allowable exposure times in hot conditions with high sweat rates.

This fluid deficit has been attributed to two phenomena. The first is “voluntary dehydration”, in which persons dehydrate while under thermal stress despite having access to plentiful supplies of palatable water. Adolf⁴ attributed this to an inadequate thirst response—that is, the thirst response is delayed and/or insufficient to provide for adequate fluid replacement. Other authors have found that the thirst sensation does not begin until about 1–2% of body weight or 2% of total body water²¹ has been lost. There is still disagreement as to whether the thirst response is inadequate or merely delayed, or both.^{21,22}

The second phenomenon is rather confusingly called “involuntary dehydration”. It refers to the fact that during the

dehydration process (or once hypohydrated), the rate of fluid retention (or rate of rehydration), even when the fluid intake exceeds the sweat rate, is governed largely by the ability to replace the solutes lost in sweat, principally sodium.²³⁻²⁶

Other authors have found and described a condition called “sweat gland fatigue”,^{4,5,19,27} Its pathogenesis remains unclear²⁸; however, it has been implicated in reductions in sweat rates of up to 50% after continuous exposures of four hours.^{29,30} Sweat gland fatigue should not be confused with hidromeiosis, which is a localised reduction in sweat rate; several mechanisms have been proposed for this but the most probable is that localised swelling (hydration) of the stratum corneum results in mechanical obstruction of the sweat duct.^{19,28,31}

A further issue for review in this study was to examine the importance of the meal break in maintaining the hydration state. Early authors such as Adolf⁴ found that the meal break had an important role in rehydration. He found that the ingestion of food during a meal break stimulated the thirst response and led to the intake of additional fluids, which he found essential to restoring total body water. With the trend towards longer (for example, 12 hour) shifts, the number of meal breaks and their location within the working shift and duration could be more significant than on traditional eight hour shifts.

A combined “dehydration and heat illness protocol” (fig 1) and other management procedures were introduced at this operation immediately prior to and during these studies.³² Figure 1 superseded an earlier protocol that included a Fantus test.³³ These protocols introduced a new heat stress index³⁴ and a more proactive approach to the management of heat stress, heat illness, and dehydration in the workplace than had previously been the case. Hydration status was estimated from urinary specific gravity, which is considered to be an important indicator of the absolute hydration status of the body and of relative changes in hydration status over time, although it does not mimic body water loss in a perfectly linear relation,³⁵ and may be in error where the subject is experiencing diuresis as a result of alcohol or caffeine intake, or is taking vitamin supplements or some drugs.

Pure water has a specific gravity of 1.000 (dimensionless), while the maximum concentrating capacity of the renal system is about 1.050. In this study, a dehydrated state was considered to be a specific gravity >1.030, based on the criterion used by the Australian Pathology Association. A euhydrated state was considered to be <1.015, based on work by Donoghue and colleagues^{35a} and the fact that 1.015 is one standard deviation below the average start of shift value found for workers in this study. However, Armstrong and colleagues³⁵ reported that a euhydrated state is a specific gravity of 1.004 (0.002), using a carefully controlled protocol to ensure euhydration in nine male athletes; this is well outside the range of 1.015–1.024 considered to be “normal” by Reaburn and Coutts.³⁶ Armstrong’s definition of euhydration as being a fully hydrated condition (that is, no net body water deficit), is different to the more common usage of the term as being a normally hydrated condition. Further work is needed to fully define euhydration in an occupational setting.

Figure 1 shows that workers under significant levels of thermal stress were tested at the end of shift, and if their specific gravity exceeded 1.030, were required to re-present and have a specific gravity not exceeding 1.022 prior to commencing their next shift. The value of 1.022 was an arbitrary value approximately halfway between a euhydrated (1.015) and dehydrated (1.030) state.

METHODS

Subjects

All participants gave their written informed consent to a series of studies that was authorised by management, their labour

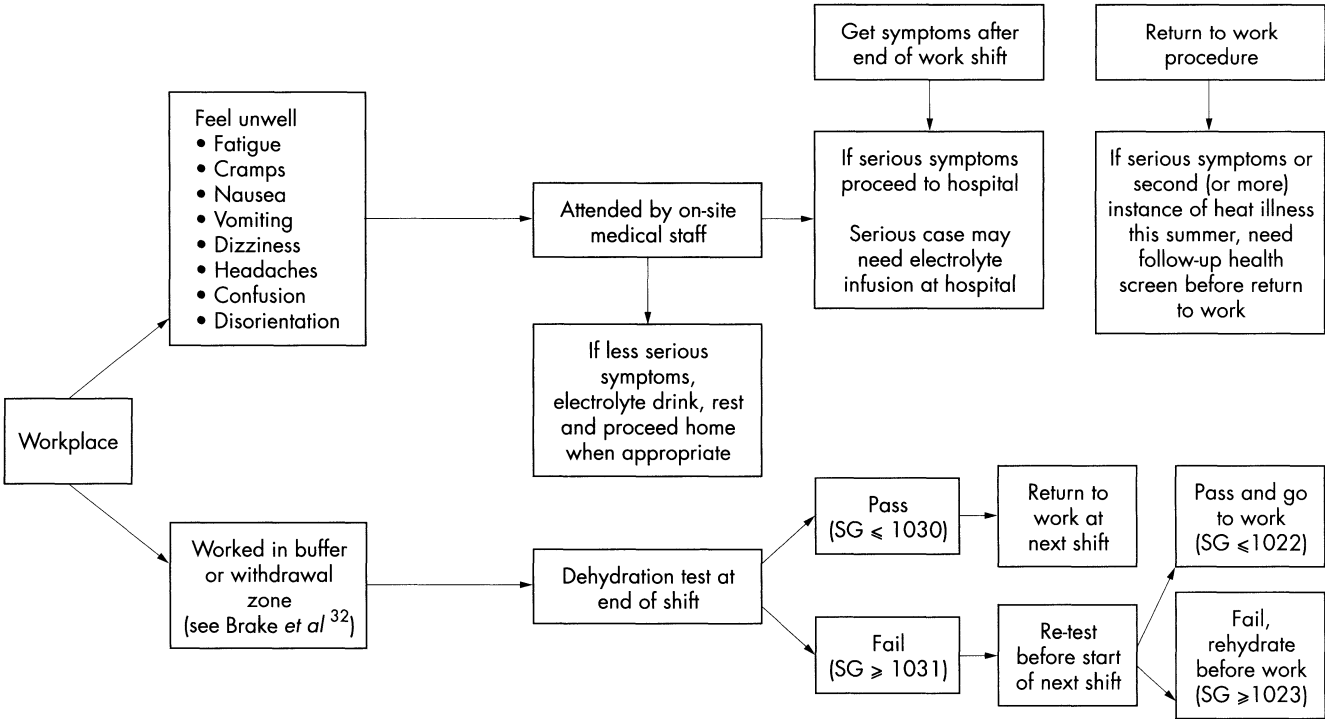


Figure 1 Dehydration and heat illness protocol used in workplace. SG, urinary specific gravity measured using hand refractometer.

unions, and the supervising organisation’s ethics committee on human experimentation.

The workers in these mines were all relatively well informed about the issues of working in heat, and in particular about the need for self pacing and for fluid replacement. Workers were not generally subject to any regular form of medical assessment, apart from a pre-employment health screen. No worker in the study reported heat illness and all workers were engaged in their ordinary work activities.³⁷

Submaximal $\dot{V}O_2$ (aerobic capacity) was measured using the Astrand and Rodahl protocol.

Studies

The main study measured the hydration state of 39 male workers most exposed to heat stress before, at the midpoint, and at the end of their shift. The environmental conditions in which they were working and their fluid intake were also measured or estimated regularly during the shift.

For comparison purposes, the specific gravity of a sample of 64 workers prior to commencing their work shift was also measured. No further interaction was had with these workers.

The end of shift specific gravity of all workers (n = 546) who were working in such extreme environments that their shift length had been reduced to six hours duration (locally called a “hot job”) was also collected over a period of approximately 12 months. Temperatures in a “hot job” had to exceed a wet bulb globe temperature (WBGT) of approximately 32–33°C; the actual values were based on an adaptation of the predicted four hour sweat rate (P_4SR).³⁸ If work continued in these conditions for at least two hours, the shift duration was reduced to six hours (which includes a meal break). The maximum exposure time to heat stress under a “hot job” would be four hours.

Part of the reason for the comparison studies was to ensure that workers who were studied in the main study did not modify their behaviour, compared to workers who were not monitored during their work shift.

Urinary specific gravity

Urinary specific gravity was measured using a handheld, optical refractometer (Atago Uricon-NE) at the start, mid (just before the meal break [called “crib”]) and end of shift.

Environmental conditions

Environmental conditions were measured at each workplace approximately every 60–90 minutes using a heat stress meter,³⁹ which provides digital readouts of ventilated wet bulb temperature (WB), dry bulb temperature (DB), wind speed, globe temperature, calculated mean radiant temperature, barometric pressure, and WBGT. Sling (whirling) psychrometers and vane anemometers were also used to obtain redundant measurements of the most important environmental parameters in these workplaces: WB, DB, and wind speed. WBGT was evaluated in accordance with ACGIH guidelines.⁴⁰ Thermal work limit (TWL) values³⁴ were calculated assuming a barometric pressure of 110 kPa (an approximate average barometric pressure for the workplaces, about 1000 metres below sea level; TWL is not highly sensitive to small changes in barometric pressure).

Fluid consumption

Fluid consumption was estimated by allocating a separate 4 litre water bottle to each worker participating in the study. The cup on each water bottle had a capacity of 400 ml. Each worker was visited approximately every 60–90 minutes and the water consumption estimated from the cups drunk and checked against water levels in the bottle.

The heat stress exposure hours were obtained by deducting 3.5 hours from a 12 or 12.5 hour shift, and 2.5 hours from a 10 hour shift. This is based on prior internal reviews that showed that for a shift with one meal (“crib”) break, workers lose 2.5 hours in travelling underground to their crib room, getting instructions from their supervisor, getting to the job, returning to the crib room for lunch, returning to the workplace after crib, and returning to the hoisting shaft before the end of the shift to get back to the surface by shift end.

Table 1 Anthropometric and body morphology for the 39 workers in the main study					
	Age (y)	Height (cm)	Weight (kg)	BMI	$\dot{V}O_{2\max}$ (ml/kg/min)
n	39	38	38	37	18
Average	35	178	88	27.9	39.1
SD	8	9	16	4.0	7.7
Range	21–52	147–196	65–125	22.1–38.2	28.0–56.3

BMI, body mass index.

For 12 hour shifts, workers take two 30 minute meal breaks per shift, so that exposure time is 3.5 hours less than nominal work duration. Workers on 10 hour shifts have one 30 minute break per shift. Crib breaks may be taken at any time convenient to the workers.

An additional 30 minutes was typically lost at the start and end of each subject’s shift, for administrative reasons associated with the test protocol. Therefore fluid consumption rates calculated as litres per hour in this study may be somewhat conservative.

The main study provided pairs of data (before–mid shift, mid–end shift, before–end shift) and the differences were assessed using the paired, two tailed Student’s *t* test assuming equal variances. For the other tests, paired data were not available so the unpaired, one tailed Student’s *t* test assuming equal variances was used.

RESULTS

Subjects

Table 1 presents a summary of the anthropometric and body morphology data and $\dot{V}O_{2\max}$ for the subjects in the main study.

Environmental conditions

Environmental conditions for the main study were measured at each workplace approximately every 60–90 minutes, with 233 sets of readings taken in total. Of these 233 sets, 46 observations were in the cribroom or inside air conditioned mobile equipment cabins, leaving 187 sets from thermally exposed workplaces (table 2). The unweighted average of these 187 sets was 28.4°C WB, 36.2°C DB, 36.3°C globe temperature, 1.1 m/s wind speed, 30.9°C WBGT, and a TWL of 175 W/m².

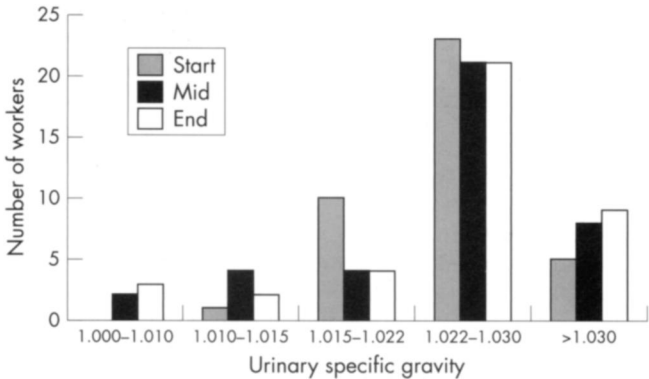


Figure 2 Urinary specific gravity of 39 workers working in very thermally stressed conditions at start, middle, and end of shift.

Hydration

The main study

The start, mid, and end of shift urinary specific gravity values were measured for 39 workers over 39 shifts. Nine of these shifts were 10 hours duration and 30 shifts were 12 hours duration. Table 3 and fig 2 summarise the results. There is no significant difference in the means of the paired sets of specific gravity values, either between start and mid shift (*p* = 0.81), between mid and end of shift (*p* = 0.70), or between start and end of shift (*p* = 0.85).

Comparison with other workers at start of shift

The average urinary specific gravity of the separate group of workers (*n* = 64) prior to going underground was 1.0225 (SD 0.0078, range 1.0020–1.0350). Nine per cent of this group came to work with a specific gravity exceeding 1.0300 and a total of 56% had a specific gravity exceeding 1.0220, these being the allowable end and start of shift limits under the dehydration protocol.

Comparison with “hot job” workers at end of shift

The average specific gravity at the end of shift for all workers (*n* = 546) who worked in “hot job” conditions over the previous 12 months was 1.0244 (SD 0.0067, range 1.0020–1.0360). None of these workers reported symptoms of heat illness. For these individuals, specific gravity was checked on the surface rather than underground; this could be between 30 minutes and two hours after the completion of the heat exposure, so

Table 2 Environmental conditions for the workers in the main study						
	WB (°C)	DB (°C)	GT (°C)	Wind (m/s)	WBGT (°C)	TWL (W/m²)
n	187	187	187	187	187	187
Average	28.4	36.2	36.3	1.1	30.9	175
SD	2.2	2.6	2.8	1.6	2.0	42
Range	24.2–33.7	23.7–41.3	23.8–41.3	0.1–7.0	25.7–35.2	83–268

Table 3 Urinary specific gravity data from the main study			
	Specific gravity		
	Start of shift	Mid shift	End of shift
n	39	39	39
Average	1.0252	1.0248	1.0254
SD	0.00533	0.00533	0.00686
Range	1.012–1.035	1.009–1.035	1.006–1.035
p value	Start to mid = 0.85	Mid to end = 0.70	Start to end = 0.85

that some workers in this study would have rehydrated to some extent prior to providing their urine samples.

The average end of shift specific gravity of these workers ($n = 546$) was significantly higher ($p = 0.019$) than the start of shift specific gravity of the group of workers ($n = 64$) prior to commencing work. However, the absolute increase (1.0220 to 1.0244) was small.

Fluid consumption

The fluid consumed during the working shift was monitored and recorded in detail for 39 workers over 39 shifts with a total nominal shift duration of 444 hours (comprising 23×12 hour shifts, 3×12.5 hour shifts, and 13×10 hour shifts). Estimated exposure time was 320 hours (72% of nominal work time). The remaining time was spent getting to and from the workplace, and having meal breaks, etc.

The average fluid consumption per shift was 6.48 litres (over this mix of different shift lengths) with a standard deviation of 2.41 litres and range of 2.40–12.50 litres. Moisture content in food was not included in this analysis, but would increase the calculated fluid consumption rates.

The mean full shift average fluid consumption rate was 0.8 litres per hour (SD 0.27, range 0.32–1.47).

DISCUSSION

Subjects

The average body mass index (27.5) of the target group is in the middle of the “overweight” range of 25–30 kg/m² as designated by the World Health Organisation.⁴¹ The average $\dot{V}O_{2\max}$ (39.0 ml/kg/min) is at the lower limit of the normal range (39–48 ml/kg/min) for non-athletes aged 30–39 years.⁴² The target group was typical of industrial workers at this operation. A test of 469 contract employees joining the organisation for project work under similar levels of heat stress during this period had a measured $\dot{V}O_{2\max}$ of 39.0 ml/kg/min (SD 7.8 ml/kg/min) and a body mass index of 25.9 (SD 5.4).

Environmental conditions

Fifty four per cent of workplace readings were above 30°C WBGT and 83% were above 26.7°C WBGT. Note that WBGT values of 30°C and 26.7°C are the ACGIH⁴⁰ recommended limits for continuous work for acclimatised workers at light work and moderate work respectively. On average, therefore, workers in this study were in very thermally stressful conditions. Workers in “hot jobs” (>32°C WBGT) were in even more extreme conditions.

Over 10 million manshifts have been worked at this operation over the past 30 years in conditions exceeding 28°C WB without any recorded incidence of heat stroke.⁴³ As work in this operation includes both light and moderate rates, with periods of hard work, and work continues in conditions well above the ACGIH recommended values, it could be concluded that the probability of developing a life threatening heat illness (stroke) under the ACGIH guidelines is very low for self paced, acclimatised workers.

Hydration changes

As there is no statistical change in the mean specific gravity before, during, or at the end of the working shift, it can be concluded that workers sweating under these substantial levels of thermal stress do have the ability to maintain their hydration state. Note that these results do not support voluntary or involuntary dehydration. This varying conclusion is supported by Donoghue and Bates⁴ who found that serum sodium levels were within the normal range, both for workers at this operation who developed heat illness and for those who did not. The explanation for these contrary findings is almost certainly the strong emphasis at this operation on workforce education, self pacing, and programmed drinking during the working shift.

Note also that over 60% of the workers in this study were commencing their shift insufficiently hydrated to be fit for work in hot conditions, using the definition at this workplace of a specific gravity exceeding 1.0220.³³ However, while these workers were hypohydrated at the start of their shift, they were non-dehydrating during their shift.

Comparison with other workers at start of shift

The average specific gravity of this group prior to commencing their shift was 1.0225 (SD 0.0078, range 1.002–1.035) which confirmed that workers are substantially hypohydrated prior to starting work.

Comparison with “hot job” workers at end of shift

Those workers who worked in the most severe thermal stress (WBGT >32°C) did dehydrate during their shift, compared to workers at the start of their shift. The absolute increase is small (from 1.0225 to 1.0246); however, this could be affected by the time delay between exposure and measurement.

The main differences between the groups of workers in the main study (table 1) and the comparison studies, is that the workers in the main study were monitored regularly during their shift as to how much water they were drinking, and can therefore be assumed to be much more focused on replacing fluids, compared to the comparison studies, where no fluid monitoring was conducted. These data do therefore tend to support the conclusion that there is some altered behaviour when workers’ fluid consumption is being monitored.

Fluid consumption

These average and maximum fluid consumption rates are well in excess of values reported for workers in more temperate climates,¹² and the maximum values are well above those considered advisory by some sources.¹³

Virtually all the rehydration beverage was water, with relatively minor quantities of coffee, tea, cola soft drinks, and sports drinks consumed. No carbonated drinks can be purchased in the workplace or lunch rooms and few workers bring soft drinks as part of their lunch. Some workers used the low joule cordial flavouring provided by the employer.

Over the 39 shifts, fluid consumption during meal breaks amounted to 31 litres, or 14% of the total fluid consumed. Duration of meal breaks (60 minutes) as a proportion of exposure time was approximately 12%. The role of the meal breaks is therefore less important in maintaining fluid intake in these workers than has been found previously. Given the conclusion above that these workers are, on average, not dehydrating during their working shift, the probable reasons for the relatively low consumption of fluids during the meal break are:

- The ad libitum availability of water “on the job” in personal water bottles
- Water is cold and moderately palatable, with free access to cordial flavouring
- Workers are educated about the need to drink small amounts frequently (the recommended value during their induction and annual refresher training is 250 ml every 15 minutes).

The findings of Adolf⁴ and others about the importance of the meal break in maintaining adequate fluid intake could possibly be explained by the above. In addition, Adolf’s subjects (soldiers) were dehydrating during their exposures, whereas these workers, on average, were not. It is important to recognise that while the meal break may not be crucial to the fluid intake of workers who are disciplined about programme drinking during their heat exposure, it is crucial to their replacement of sodium and other electrolytes.⁴⁴

Given that there was no net change in the hydration state of these workers over their shift, average sweat rates would not

Main messages

- A combined dehydration and heat illness protocol has been developed, with recommended limits of urinary specific gravity for the start and end of a working shift.
- A majority of workers started their shift in a hypohydrated state.
- Where workers were well informed and subject to monitoring, “involuntary dehydration” (if it is defined as a physiologically unavoidable dehydration during exposure to heat) did not occur. While voluntary dehydration (inadequate or delayed thirst response) has been observed regularly in other settings, it is probably a function of poor access to water, workplace practices (particularly a lack of self pacing), inadequate education, or insufficient quality or palatability of water, and is neither physiologically nor psychologically inevitable.
- While a meal break is important when working in heat, in terms of replacing solutes lost in sweat, its role in fluid replacement for well educated workers trained in the need for programme drinking during the heat exposure may be less than has been previously considered.
- Fluid consumption rates (and hence, in circumstances where workers’ hydration status is not changing, sweat rates) of up to 1.5 litres per hour occur in self paced, acclimatised, industrial workers with typical rates varying between 0.5 and 1.1 litres per hour.

Policy implications

- Education is vital if a workforce that is exposed to significant levels of thermal stress is to come to work euhydrated, and maintain their hydration state during their work shift. Paced fluid replacement (programme drinking) rather than responding to the thirst sensation is critical to maintaining hydration levels when working under thermal stress.
- Standards for occupational heat stress should not assume that workers are unable to avoid dehydration when exposed to heat—that is, involuntary dehydration should not be implicit in heat stress standards.

be significantly different to average fluid consumption rates. On this basis, five of 39 workers (13%) exceeded a sweat rate of 1.04 l/h. This implies that the allowable sweat rates recommended under standards such as ISO 7933 (1.04 litres per hour for acclimatised persons) are reasonable, although this rate can and will be safely exceeded by some workers, which is in accordance with the comments in ISO 9886.

.....

Authors’ affiliations

D J Brake, G P Bates, Queensland, Australia

REFERENCES

1 Australian Institute of Refrigeration, Air-conditioning and Heating engineers. *Application Manual No. DA9—Air conditioning load estimation and psychrometrics*. 1996:171.

2 McPherson MJ. *Subsurface ventilation and environmental engineering*. London: Chapman and Hall, 1993:557.

3 Donoghue AM, Bates GP. The risk of heat exhaustion at a deep underground metalliferous mine in relation to surface temperatures. *Occup Med* 2000;**50**:334–6.

4 Adolf EF. *Physiology of man in the desert*. New York: Interscience Publishers, 1947.

5 Leithhead CS, Lind AR. *Heat stress and heat disorders*. London: Cassell, 1964.

6 Gopinathan P, Pichan G, Sharma V. Role of dehydration in heat stress induced variations in mental performance. *J Occup Health Safety Aust N Z* 1988;**43**:15–17.

7 Kielblock AJ, Schutte PC. *Heat stress management—a comprehensive guideline*, 1st edn. Johannesburg: Chamber of Mines Research Organisation, 1991.

8 Coyle EF, Montain SJ. Thermal and cardiovascular responses to fluid replacement during exercise. In: Gisolfi CV, Lamb DR, Nadel ER, eds.

Perspectives in exercise science and sports medicine. Volume 6: Exercise, heat and thermoregulation. Dubuque, IA: Brown Publishers, 1993:214.

9 Nielsen B. Effects of heat stress and work in the heat. Chapter 42. In: Stellman JM, ed. *Encyclopaedia of occupational health and safety*. Geneva: International Labour Organisation, 1998.

10 Kielblock AJ. Strategies for the prevention of heat disorders with particular reference to the efficacy of body cooling procedures. In: Hales JRS, Richards DAB, eds. *Heat stress—physical exertion and environment, Proceedings of the 1st World Conference on Heat Stress: Physical Exertion and Environment*, Sydney, Australia. Amsterdam: Elsevier Science Publishers, 1988:489–98.

11 Gagge AP, Gonzalez RR. Mechanisms of heat exchange: biophysics and physiology. In: Fregly MJ, Blatteis CM, eds. *Handbook of physiology, Section 4: Environmental physiology, Volume 1*. Oxford: Oxford University Press, 1996:191.

12 Rodahl K, Guthe T. Physiological limitations of human performance in hot environments, with particular reference to work in heat-exposed industry. In: Mekjavic IB, Banister EW, Morrison JB, eds. *Environmental ergonomics—sustaining human performance in harsh environments*. London: Taylor & Francis, 1988:37.

13 International Organisation for Standardisation. *ISO 7933. Hot environments—analytical determination and interpretation of thermal stress using calculation of required sweat rate*. Geneva: International Organisation for Standardisation, 1989.

14 Belding HS, Hatch TF. Index for evaluating heat stress in terms of resulting physiological strain. *Heating, Piping and Air Conditioning* 1955;**27**:129–36.

15 International Organisation for Standardisation. *ISO 9886. Evaluation of thermal strain by physiological measurements*. Geneva: International Organisation for Standardisation, 1992.

16 Nunneley S. Prevention of heat stress. In: Stellman JM, ed. *Encyclopaedia of occupational health and safety*. Chapter 42. Geneva: International Labour Organisation, 1998.

17 McArdle B, Dunham W, Holling HE, et al. *The prediction of the physiological effects of warm and hot environments*. London: Medical Research Council, RNP Rep 1947/391.

18 Azer NZ. Design guidelines for spot cooling systems: Part I—Assessing the acceptability of the environment. *ASHRAE Transactions* 1982;**88**:1.

19 Kerslake DM. *The stress of hot environments*. Cambridge: Cambridge University Press, 1972.

20 Budd GM, Brotherhood JR, Hendrie AL, et al. Stress, strain, and productivity in men suppressing wildland fires with hand tools. *International Journal of Wildland Fire* 1997;**7**:69–218.

21 Sawka MN. Hydration effects of thermoregulation and performance in the heat. In: Lau WM, ed. *Proceedings of the International Conference on Physiological and Cognitive Performance in Extreme Environments*, Defence Scientific and Technology Organisation, Australian Department of Defence, Canberra. 2000:21–3.

22 Hales JRS, Hubbard RW, Gaffin SL. Limitation of heat tolerance. In: Fregly MJ, Blatteis CM, eds. *Handbook of physiology. Section 4, Environmental physiology, Volume 1*. Oxford: Oxford University Press, 1996:285–355.

23 Nielson B. Effects of fluid ingestion on heat tolerance and exercise performance. In: Hales JRS, Richards DAB, eds. *Heat stress—physical exertion and environment, Proceedings of the 1st World Conference on Heat Stress: Physical Exertion and Environment*, Sydney, Australia. Amsterdam: Elsevier Science Publishers, 1988:133–48.

24 Morimoto T. Restitution of body fluid after thermal dehydration. In: Hales JRS, Richards DAB, eds. *Heat stress—physical exertion and environment, Proceedings of the 1st World Conference on Heat Stress: Physical Exertion and Environment*, Sydney, Australia. Amsterdam: Elsevier Science Publishers, 1988:149–60.

25 Nadel ER, Mack GW, Takamata A. Thermoregulation, exercise, and thirst: interrelationships in humans. In: Gisolfi CV, Lamb DR, Nadel ER, eds. *Perspectives in exercise science and sports medicine: Volume 6, Exercise, heat and thermoregulation*. Brown & Benchmark, 1993:235.

26 Mack GW, Nadel ER. Body fluid balance during heat stress in humans. In: Fregly MJ, Blatteis CM, eds. *Handbook of physiology. Section 4, Environmental physiology, Volume 1*. Oxford: Oxford University Press, 1996:187–214.

27 Sawka MN, Wenger CB, Pandolf KB. Thermoregulatory responses to acute exercise-heat stress and heat acclimation. In: Fregly MJ, Blatteis CM, eds. *Handbook of physiology. Section 4, Environmental physiology, Volume 1*. Oxford: Oxford University Press, 1996:157.

28 Sato K. The mechanism of eccrine sweat secretion. In: Gisolfi CV, Lamb DR, Nadel ER, eds. *Perspectives in exercise science and sports medicine: Volume 6, Exercise, heat and thermoregulation*. Brown & Benchmark, 1993:85–118.

29 Jessen C. Thermoregulatory mechanisms in severe heat stress and exercise. In: Hales JRS, Richards DAB, eds. *Heat stress—physical exertion and environment, Proceedings of the 1st World Conference on Heat Stress: Physical Exertion and Environment*, Sydney, Australia. Amsterdam: Elsevier Science Publishers, 1988:1–20.

30 Stewart J. Fundamentals of human heat stress. In: *Environmental engineering in South African mines*. Johannesburg: The Mine Ventilation Society of South Africa, 1989:495–533.

31 Taylor NAS. Sweating in extreme environments: heat loss, heat adaptation, body-fluid distribution and thermal strain. In: Lau WM, ed. *Proceedings of the International Conference on Physiological and Cognitive Performance in Extreme Environments*, Defence Scientific and Technology Organisation, Australian Department of Defence, Canberra. 2000:32–5.

32 **Brake DJ**, Donoghue MD, Bates GP. A new generation of health and safety protocols for working heat. In: *Proceedings of the 1998 Queensland Mining Industry Occupational Health and Safety Conference*. Brisbane: Qld Mining Council, 1998:91–100.

33 **Cross RB**, Galton-Fenzi B, Jordan L. A simple field test for assessing salt balance in heat-stressed miners. *Occup Med* 1989;**31**:668–73.

34 **Brake DJ**, Bates GP. Limiting metabolic rate (thermal work limit) as an index of thermal stress. *Appl Occup Environ Hyg* 2002;**17**:176–86.

35 **Armstrong LE**, Herrera Soto JA, Hacker FT, *et al*. Urinary indices during dehydration, exercise and rehydration. *Int J Sport Nutr* 1998;**8**:345–55.

35a **Donoghue AM**, Sinclair MJ, Bates GP. Heat exhaustion in a deep underground metalliferous mine. *Occup Environ Med* 2000;**57**:165–74.

36 **Reaburn P**, Coutts A. Urinalyses and body mass changes during an ultra-distance endurance event: the Simpson desert cycle challenge. In: Lau WM, ed. *Proceedings of the International Conference on Physiological and Cognitive Performance in Extreme Environments*, Defence Scientific and Technology Organisation, Australian Department of Defence, Canberra. 2000:56–9.

37 **Brake DJ**, Bates GP. Occupational illness: an interventional study. In: Lau WM, ed. *Proceedings of the International Conference on Physiological and Cognitive Performance in Extreme Environments*, Defence Scientific and Technology Organisation, Australian Department of Defence, Canberra. 2000:170–2.

38 **Wyndham CH**, Allan A McD, Bredell GAG, *et al*. Assessing the heat stress and establishing the limits for work in a hot mine. *Br J Ind Med* 1967;**24**:255–70.

39 **SWRI**. <http://www.swri.edu/3pubs/today/summer98/heat.htm>, 1999.

40 **ACGIH**. Heat stress TLV. In: *TLVs and BEIs: threshold limit values for chemical substances and physical agents*. Cincinnati, OH: ACGIH, 1998:170–82.

41 **World Health Organisation**, Expert Committee on Physical Status. The use and interpretation of anthropometry 1995. *Physical status: the use and interpretation of anthropometry: report of a WHO expert committee*. WHO technical report series 854. Geneva: WHO, 1995.

42 **Wilmore JH**, Costill DL. *Physiology of sport and exercise*. Champaign: Human Kinetics, 1994.

43 **Howes M**, Nixon C. Development of procedures for safe working in hot conditions. In: Ramani RV, ed. *Proceedings of the 6th International Mine Ventilation Congress*. Littleton, CO: Society of Mining Engineers of American Inst Min, Met and Petrol Eng, 1997:191–8.

44 **Bates G**, Cena K. Measurement of sweat electrolyte loss during exercise in the heat. *J Appl Phys*. Submitted.

ECHO

Cycling in competition leaves its mark on women athletes



Please visit the Occupational and Environmental Medicine website [www.occenvmed.com] for link to this full article.

Benign unilateral enlargement of the vulva is more likely in women cyclist athletes, reports one sports doctor for the first time. The condition should be noted among other conditions affecting this group of athletes.

This sports specialist saw four cases of vulval hypertrophy on one side during one year in women cyclists of international or national ranking. One case was associated with pain and swelling in the inguinal nodes and folliculitis and another with pain from bruising of the vulva owing to cycling with a poor saddle in competition. The two other cases were found during routine checks.

Presumably the unilateral vulval hypertrophy seen here arises out of persistent asymmetric loading. The condition is unusual in the normal population, when it may signal infection or cancer, and such causes should be ruled out in women cyclist athletes.

▲ *British Journal of Sports Medicine* 2002;**36**:463–464.