
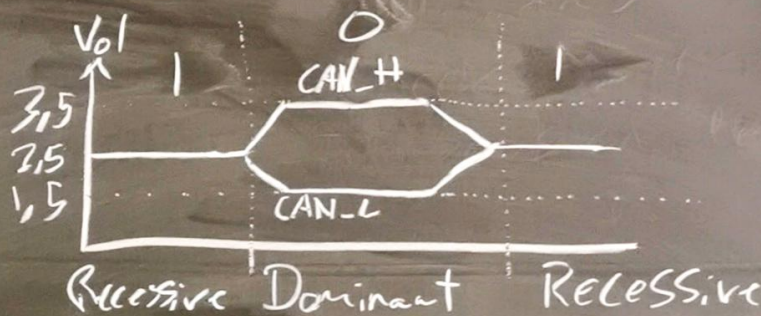


② CANBUS & FLEXRAY

Fieldbus — Majority in layer 1&2 or 1,2&7
(Single (closed) Network)

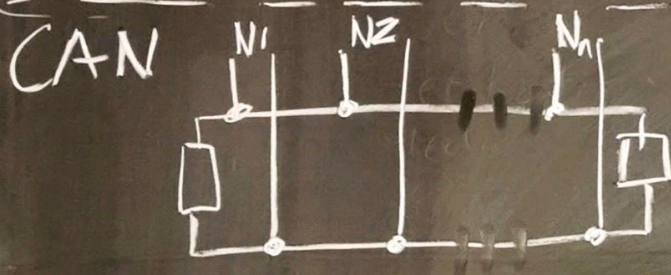

- Explain CAN ID (Priority) — TX Identifier lowest wins
- ONLY start TX when BUS Idle

Example

N ₁	0	0	0	0	Sends
N ₂	0	0	1		Stops TX
N ₃	0	0	0	1	Stops TX

evaluate
Network
Calculus

- 3 Nodes transmit can ID
- all read bus, if reads Don't match Send / Stop Send
- Dominant b: TX overwrite recessive (1) lowest wins
- MSG have ID so Node can tx diff. Prio, MSGs
- Have error detection if error transmit