Specifications for Project

RAC, Inc., Rodriguez Residence

Oak Valley Estates Lot 5

Salesperson

Haley Benware

haley.benware@blvdhome.com

REMINDER: To ensure a smooth project it is the responsibility of the homeowner / purchaser of appliances for this project to share all the attached specifications to ensure the cabinet provider, contractor, or any other tradesperson have all the information required to complete their work accurately.

Specifications are subject to change. If any tradesperson has questions regarding the attached specifications please contact our sales associate.

Powered by SteelCod

RAC, Inc., Rodriguez Residence

Oak Valley Estates Lot 5

Contents	*Page no.*
T36IR905SP Thermador Refrigeration 36" Freedom Built-In Fresh Food Column Panel Ready	5-7
T36IF905SP Thermador Refrigeration 36" Freedom Built-In Freezer Column With Internal Ice Maker	8-10
MEDMC301WS Thermador Wall Oven 30" Masterpiece® Combination Speed Oven	11-13
AK9446BS Zephyr Ventilation 48" Monsoon Connect Insert	14-15
DWHD640EPR Thermador Dishwasher 24" Emerald® Dishwasher Custom Panel Ready	16-17
PRB24C01CPG	18-19

Boulevard Home
blvdhome.com

Haley Benware
4352299475

Invoice **20260514012405164SC**
Version 1.1

Wed, May 13, 2026
7:24 PM MDT

enterprise.steelcod.com/sp/blvd/3DGMH51C

Note about page numbers:
Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only. Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.

Zephyr Refrigeration

24" Single Zone Beverage Cooler

SRNG110A-1SU 20-23
Scotsman Refrigeration

110 lb Nugget Ice Machine - Gravity Drain - Panel Ready

GRSC2352AF 24-26
Frigidaire Refrigeration

Frigidaire Gallery 22.3 Cu. Ft. 36" Counter Depth Side by Side Refrigerator

FMOS1746BS 27-29
Frigidaire Microwave

1.7 Cu. Ft. Over-The-Range Microwave

FCRE3062AS 30-32
Frigidaire Range

30" Electric Range with the EvenTemp™

FFCD2413US 33-35
Frigidaire Dishwasher

Frigidaire 24" Built-In Dishwasher

WKEX200HWA 36-41
LG Washer-Dryer Combo

Single Unit LG WashTower™ with Center Control™ 4.5 cu. ft. Front Load Washer and 7.4 cu. ft. Dryer

GFW655SPVDS 42-46

Note about page numbers:
Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only.
Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.

GE Washer

5.0 cu. ft. Capacity Smart Front Load ENERGY STAR® Steam Washer with SmartDispense™ UltraFresh Vent System with OdorBlock™ and Sanitize + Allergen

GFD65ESPVDS

47-52

GE Dryer

7.8 cu. ft. Capacity Smart Front Load Electric Dryer with Steam and Sanitize Cycle

Note about page numbers:
Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only.
Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.

T36IR905SP
36-INCH BUILT-IN FRESH FOOD COLUMN
FREEDOM® COLLECTION, PANEL-READY



FEATURES & BENEFITS

- Full Stainless Steel Inner Liner
- Freedom® Hinge enables true flush design
- Auto Door Opening provides the opening of the door with just a slight push or pull
- ThermaFresh® System, Humidity and Temperature controlled drawers
- Soft Close Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- Touchscreen display panel controls settings, including individual temperature control and lighting

TEMPERATURE RANGES	
Refrigerator	36°F (2°C) to 46°F (8°C)
Temperature Controlled Drawer	30°F (-1°C) to 38°F (3°C)
SuperCool	36°F (2°C) for approximately 6 hours
Energy Saving (Economy) Mode	43°F (6°C)

GENERAL PROPERTIES	
Home Connect® (Wi-Fi Enabled)	Yes
Panel Ready	Yes
Reversible Door Swing	Yes
Soft Close Door	Yes
Soft Close Drawers	Yes
Carbon Air Filter	Yes
Lighting	LED Sidewall and Theater Lighting
Refrigerator Shelves	4
Adjustable Shelves	3
Shelf Material	Glass w/Aluminum Profile
Full Extension Drawers @ 115° Door Opening Angle	Yes
Full Extension Drawers @ 90° Door Opening Angle	Yes
General Use Drawer	1
Humidity Managed Drawer	1
Temperature Controlled Drawer	1
Door Bins	3
Gallon Door Bins	1
Door Open Alarm	Yes
Open Door Assist	Yes
Special Modes	Sabbath, Economy, Vacation
CAPACITY	
Total Capacity (cu. ft.)	20.6 cu. ft.
PERFORMANCE	
Dedicated Evaporator & Compressor System	Yes
Freeflow® Cold Air System	Yes
SuperCool	Yes
TECHNICAL DETAILS	
Watts (W)	350 W
Current (A)	15 A
Volts (V)	110-120 V
Frequency (Hz)	60 Hz
Power Cord Length (in.)	118
Plug Type	120V-3 Prong
DIMENSIONS & WEIGHT	
Appliance Dimensions (H x W x D) (in.)	83 3/4"* x 35 3/4" x 24"
Required Cutout Size (H x W x D) (in.)	84" x 36" x 25"
Net / Gross Weight (lbs)	406 / 449 lbs
EFFICIENCY	
ENERGY STAR® Certified	Yes
Annual Energy Consumption	312 kWh


*Height adjustable + / -1/2" (+ / -13 mm)

T36IR905SP
36-INCH BUILT-IN FRESH FOOD COLUMN
FREEDOM® COLLECTION, PANEL-READY

WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System*; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System*; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

*Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing


CUTOUT DIMENSIONS

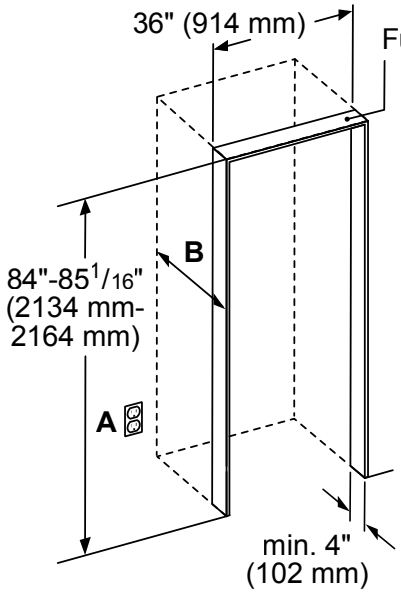

A: Area for installation of power connection.


B: Recess depth depends on kitchen design.

TOP VIEW CLEARANCE

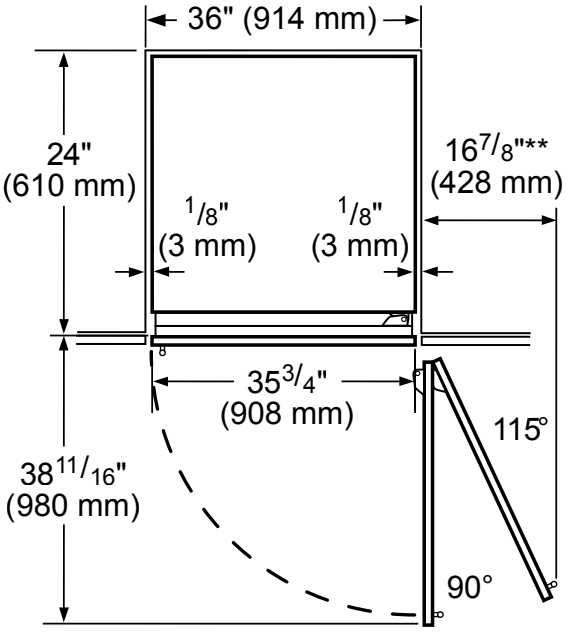


** Door handle must be added to this dimension


* Depends on the thickness of the furniture door. 3/4" (19 mm) is relevant for the stainless steel door. (special Accessory).

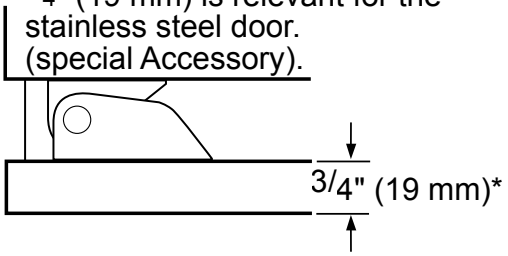

T36IR905SP
36-INCH BUILT-IN FRESH FOOD COLUMN
FREEDOM® COLLECTION, PANEL-READY

PRODUCT AND PANEL DIMENSIONS

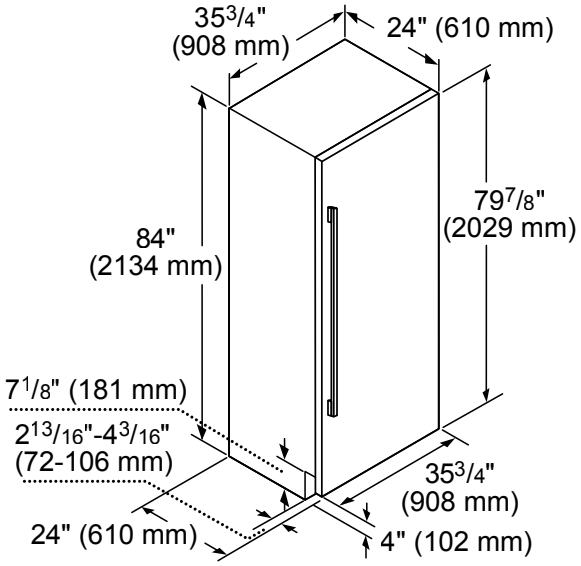

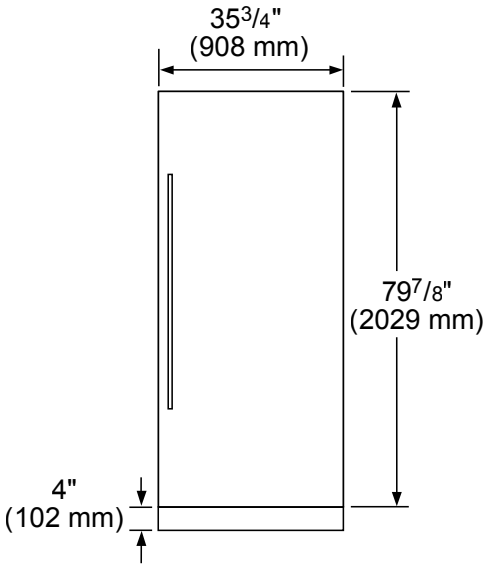

ACCESSORIES (OPTIONAL)

FLAT STAINLESS STEEL DOOR PANELS

36-Inch Flat Stainless Steel Door Panel Without Dispenser



TFL36IR900
For use with Handle

TFL36IR905
Handleless

HANDLES

Choose between two options:



PR36HNDL20
36-Inch Professional Collection Handle

or

MS36HNDL20
36-Inch Masterpiece® Collection Handle

STORAGE



SPRODBIN10
Small Produce Bin



LPRODBIN10
Large Produce Bin




36PRODRAIL
36-Inch Produce Railing



36HFGALBIN
36-Inch Half Gallon Bin

FRAMEKIT10

Freedom® Frame Kit
For any custom column installation in 24-inch deep cutouts. With two metal side trims whose placement between the interior cutout wall and the appliance helps overcome the challenge of unfinished cabinet returns.



HEATRKIT20 – 13W @ 120V

Freedom® Heater Kit
Low voltage heating element designed to guard against condensation build up. For use with non-traditional side-by-side installations (i.e. two wine columns) or instances where appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side. This kit is recommended for areas that are subject to high humidity or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2024 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

T36IF905SP

36-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER

FREEDOM® COLLECTION, PANEL-READY



FEATURES & BENEFITS

- Full Stainless Steel Inner Liner
- Freedom® Hinge enables true flush design
- Auto Door Opening provides the opening of the door with just a slight push or pull
- Energy Efficient Diamond Ice made with twist tray technology
- Smooth Filtered Lighting for clear and easy viewing of all product
- Soft Close Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- Touchscreen display panel controls settings, including individual temperature control and lighting

TEMPERATURE RANGES

Freezer	-11°F (-24°C) to 7°F (-14°C)
SuperFreeze®	-22°F (-30°C) for approximately 52 hours
Energy Saving (Economy) Mode	3°F (-16°C)

GENERAL PROPERTIES

Home Connect® (Wi-Fi Enabled)	Yes
Panel Ready	Yes
Reversible Door Swing	Yes
Soft Close Door	Yes
Soft Close Drawers	Yes
Lighting	LED Sidewall and Theater Lighting
Freezer Shelves	4
Adjustable Shelves	3
Shelf Material	Glass w/Aluminum Profile
Full Extension Drawers @ 115° Door Opening Angle	Yes
General Use Drawer	2
Door Bins	3
External LED Proximity Sensor	No
Oversized Dispenser Opening	No
Chilled Water, Crushed and Cubed Ice	No
Rapid Water Replenishment System	No
Ice Maker with Diamond Ice System	Yes
Door Open Alarm	Yes
Open Door Assist	Yes
Special Modes	Sabbath, Economy, Vacation

CAPACITY

Total Capacity (cu. ft.)	19.4 cu. ft.

PERFORMANCE

Dedicated Evaporator & Compressor System	Yes
SuperFreeze®	Yes
Defrost Process	Frost-Free

TECHNICAL DETAILS

Watts (W)	350 W
Current (A)	15 A
Volts (V)	110-120 V
Frequency (Hz)	60 Hz
Power Cord Length (in.)	118
Plug Type	120V-3 Prong

DIMENSIONS & WEIGHT

Appliance Dimensions (H x W x D) (in.)	83 3/4"* x 35 3/4" x 24"
Required Cutout Size (H x W x D) (in.)	84" x 36" x 25"
Net / Gross Weight (lbs)	395 / 437 lbs

EFFICIENCY

ENERGY STAR® Certified	Yes
Annual Energy Consumption	528 kWh


*Height adjustable + / -1/2" (+ / -13 mm)

T36IF905SP
36-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER
FREEDOM® COLLECTION, PANEL-READY

WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System*; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System*; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime


*Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

CUTOUT DIMENSIONS

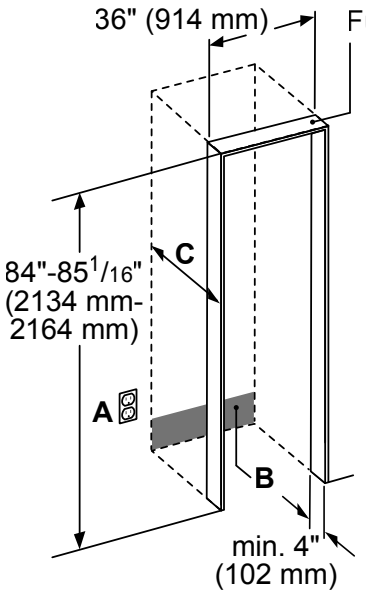


A: Area for installation of power connection.
B: Area for running the water line. It is recommended that the waterbox is placed adjacent to the installation cavity, so that it can be accessed for service without uninstalling the appliance. If this is not possible, place the recessed waterbox adjacent to the water supply socket elevated at the heights as referenced in areas A and B.
C: Niche depth depends on kitchen design. For a flush installation, the depth needs to be at least 24 inches plus the thickness of the door panel.

Stainless steel models contain a panel-ready base unit, ready-to-install stainless steel door(s) with a right or left door swing and handle(s).




TOP VIEW CLEARANCE

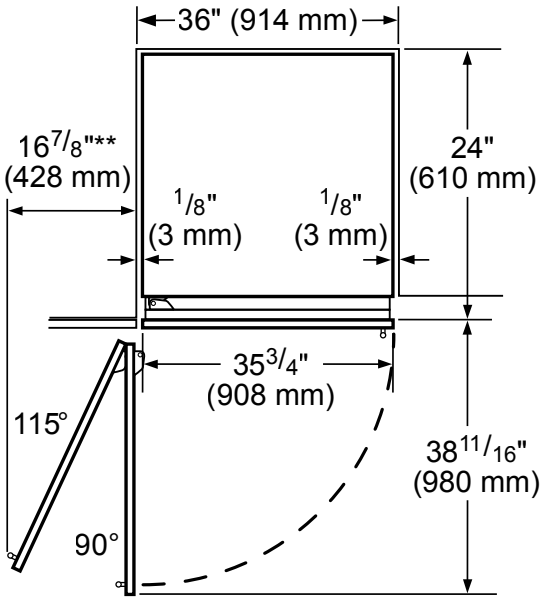


** Door handle must be added to this dimension

* Depends on the thickness of the furniture door. 3/4" (19 mm) is relevant for the stainless steel door. (special Accessory).

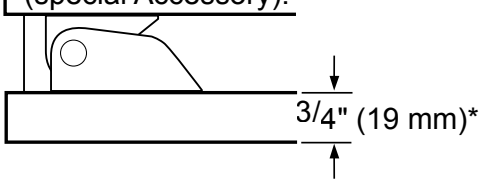

T36IF905SP
36-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER
FREEDOM® COLLECTION, PANEL-READY

PRODUCT AND PANEL DIMENSIONS

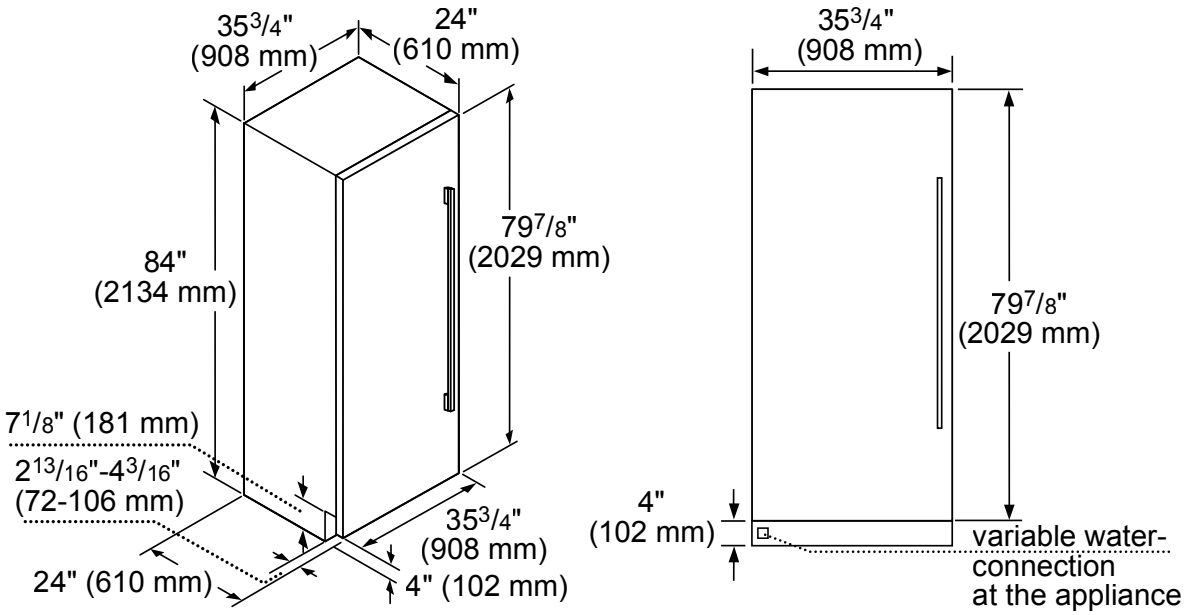

ACCESSORIES (OPTIONAL)

FLAT STAINLESS STEEL DOOR PANELS

36-Inch Flat Stainless Steel Door Panel Without Dispenser



TFL36IR900
For use with Handle

TFL36IR905
Handleless

STORAGE



ICEBUCKETL
Large Ice Bucket

FRAMEKIT10

Freedom® Frame Kit
For any custom column installation in 24-inch deep cutouts. With two metal side trims whose placement between the interior cutout wall and the appliance helps overcome the challenge of unfinished cabinet returns.

HANDLES

Choose between two options:



PR36HNDL20
36-Inch Professional Collection Handle

or




MS36HNDL20
36-Inch Masterpiece® Collection Handle

FILTERS



REPLFLTR55
Freedom® Water Filter
Replacement water filter for use in all freezer and bottom freezer models



HEATRKIT20 – 13W @ 120V

Freedom® Heater Kit
Low voltage heating element designed to guard against condensation build up. For use with non-traditional side-by-side installations (i.e. two wine columns) or instances where appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side. This kit is recommended for areas that are subject to high humidity or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2024 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

MEDMC301WS
30-INCH DOUBLE COMBINATION BUILT-IN OVEN WITH SPEED OVEN
MASTERPIECE® COLLECTION



Home Connect

FEATURES & BENEFITS

- Specially crafted gray glass on stainless steel for a luxurious look and finish
- Designed for flexibility—standard or flush installation into kitchen cabinets
- Speed oven with microwave capability can broil and convection bake
- Large commercial style rotisserie with 12 pound capacity
- Multi-point Meat Probe to better capture temperature in roast and poultry

ACCESSORIES (INCLUDED)

Upper Cavity: Metal Turntable, Rack, Ceramic Tray; Lower Cavity: 3 Telescopic Racks, Multi-point Meat Probe, Rotisserie

WARRANTY

Limited Warranty Parts and Labor	2 Year

GENERAL PROPERTIES

Heating Modes – Upper Cavity

36 CookSmart® Auto Programs (including True Convection, Speed Convection, Broil, Convection Broil, Heating Programs, Keep Warm) and Microwave Programs

Heating Modes – Lower Cavity

(16) Bake, Broil, Max Broil, Roast, Convection Bake, Convection Broil, Max Convection Broil, Convection Roast, Proof, Warm, Pizza, True Convection, Dehydrate, Speed Convection, Slow Roast, Rotisserie

Sabbath		Yes
Cleaning Type – Lower Cavity		Easy Clean and Self Clean
Telescopic Rack(s)		3
Illumination Type	Upper Cavity Lower Cavity	LED Halogen
Interior Lights	Upper Cavity Lower Cavity	1 2
Home Connect® (Wi-Fi Enabled)		Yes, Lower Oven Only

OVEN PERFORMANCE

Microwave Power		1,000 W
Bake / Broil Element	Upper Cavity Lower Cavity	600 W / 1,750 W 2,400 / 1,000 / 3,800 W
Convection Element	Upper Cavity Lower Cavity	1,700 W 2,000 W

TECHNICAL DETAILS

Watts	10,200 W
Circuit Breaker	50 A
Volts; Frequency	240 / 208 V; 60 Hz
Plug Type	Fixed Connection, No Plug
Conduit	60" 4-Wire
Energy Source	Electric


DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD)	49" x 29 3/4" x 24 1/2"
Trim Overlaps (Top – Sides – Bottom)	1/2" – 9/16" – 0"
Required Cutout Size (HxWxD) – Standard	48 1/2" x 28 1/2" x 23 1/2"
Required Cutout Size (HxWxD) – Flush	49 1/8" x 30" x 24 1/2"
Speed Oven Capacity	1.6 cu. ft.
Oven Capacity	4.5 cu. ft.
Overall Lower Oven Interior Dimensions (HxWxD)	17 3/4" x 24" x 17 7/8"
Usable Lower Oven Interior Dimensions (HxWxD)	13 1/2" x 21 5/8" x 16 1/4"
Net Weight	267 lbs

MEDMC301WS
30-INCH DOUBLE COMBINATION BUILT-IN OVEN WITH SPEED OVEN
MASTERPIECE® COLLECTION


30-INCH DOUBLE COMBINATION OVEN WITH SPEED OVEN

Combination Oven with Microwave or Speed Oven

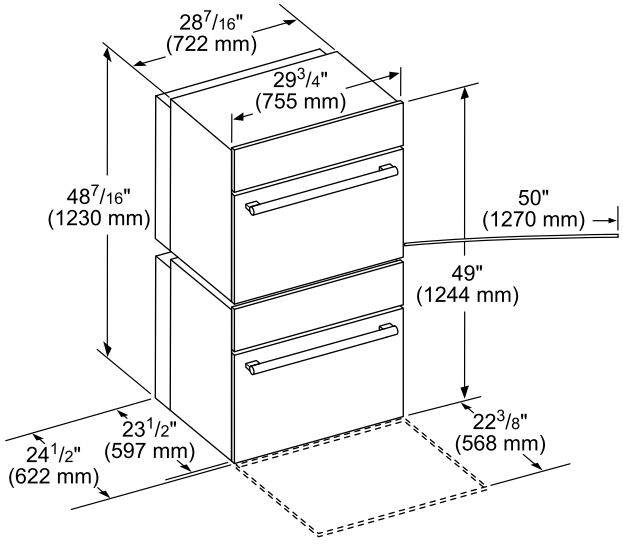


measurements in inches (mm)

Door Handle Depth*
Masterpiece Series Handle




*Protrusion of handle from door skin

Combination Oven with Microwave or Speed Oven

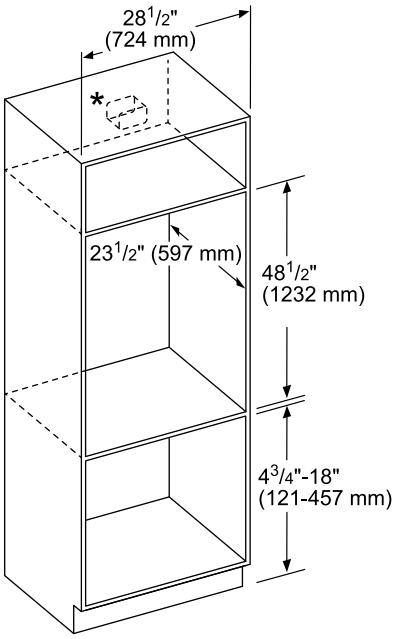


* Junction box may be installed above, beneath, right or left of the unit within range of the power cord.

Combination Oven with Microwave or Speed Oven, flush mount installation
Top View Bottom Hinge Door

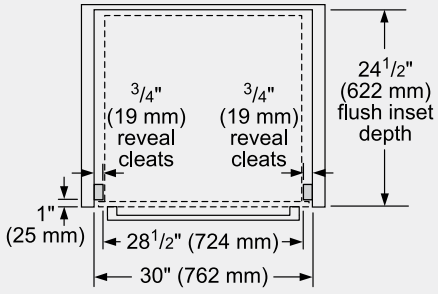

measurements in inches (mm)

Side View-Combination Oven with Microwave or Speed Oven

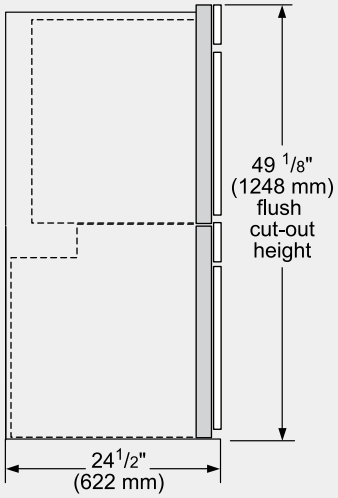


measurements in inches (mm)

MEDMC301WS
30-INCH DOUBLE COMBINATION BUILT-IN OVEN WITH SPEED OVEN
MASTERPIECE® COLLECTION

INSTALLATION DETAILS

Standard installation
Single oven, double oven or combo oven over warming or storage drawer

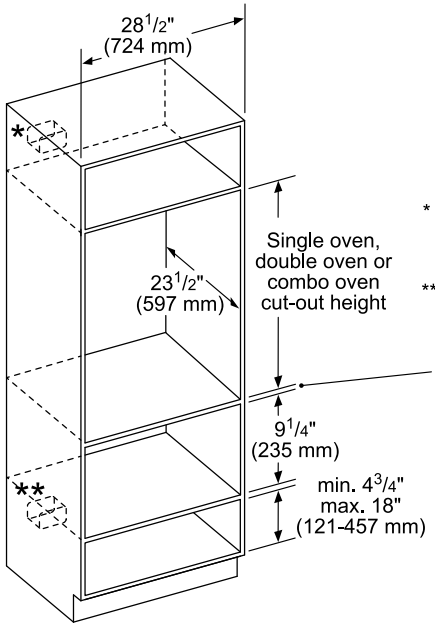


* Wall oven junction box may be located above or to the right or left of the unit within reach or the power cable.

**Electrical hook-up may be located below (depending on space) or next to the drawer within reach of the power cable.

Minimum 3/4" (18 mm) required between cut-outs.

measurements in inches (mm)

Flush installation
Double or combo oven over storage or warming drawer

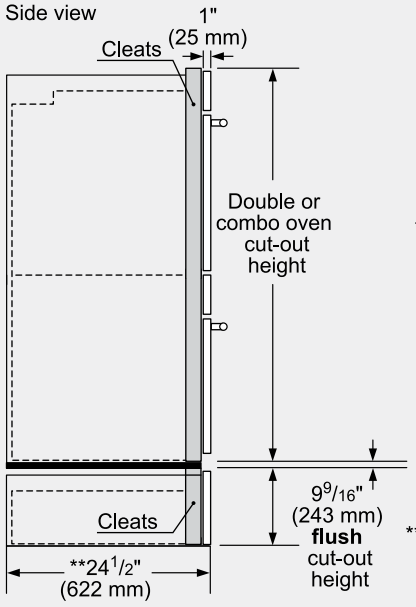

*IMPORTANT: Base has to be able to support the weight of the oven. Please check oven manual for minimum weight requirements.

minimum 1/2" (13 mm) required between cut-out*

Warming drawer

**For WD30W, the installed dimension may differ. This is based on 3/4" (19 mm) thick custom panel.

measurements in inches (mm)

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.


1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2025 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*		
SINGLE BLOWER (INCLUDED) Min. - Max. CFM	200 - 700	200 - 590	200 - 390	200 - 290
SINGLE BLOWER (INCLUDED) Min. - Max. Sones	0.8 - 6			
DUAL BLOWER (OPTIONAL) Min. - Max. CFM	300 - 1,300			
DUAL BLOWER (OPTIONAL) Min. - Max. Sones	1 - 8			


*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.






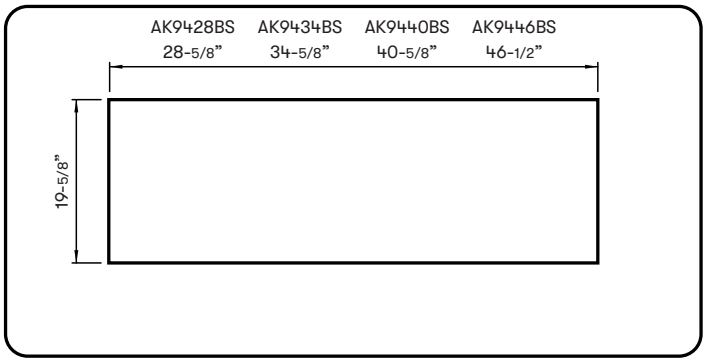


Cabinet Bottom Cut-Out Size (W x D): 28-5/8” x 19-5/8” (AK9428BS), 34-5/8” x 19-5/8” (AK9434BS), 40-5/8” x 19-5/8” (AK9440BS), 46-1/2” x 19-5/8” (AK9446BS)

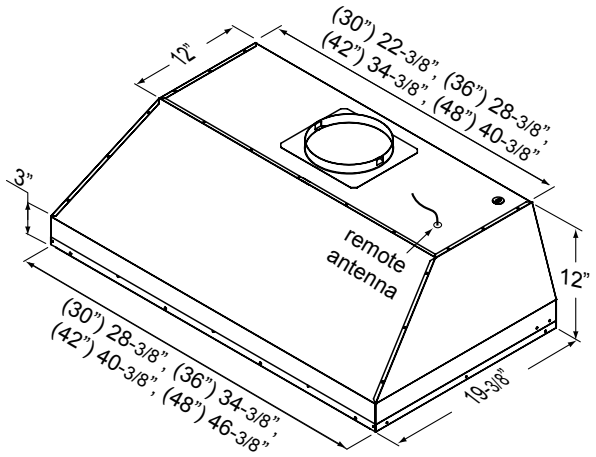

3/4 VIEW

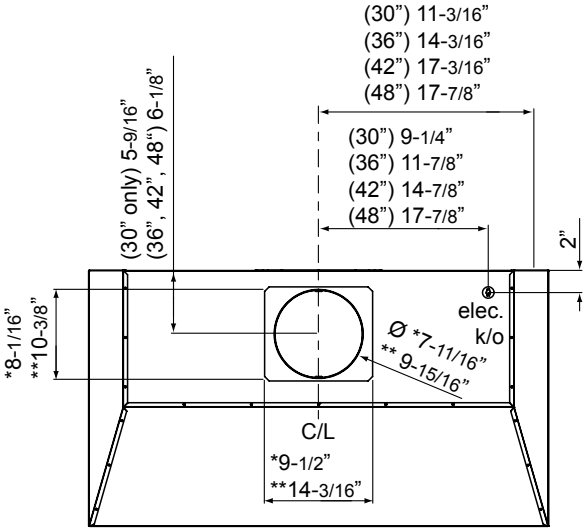

TOP

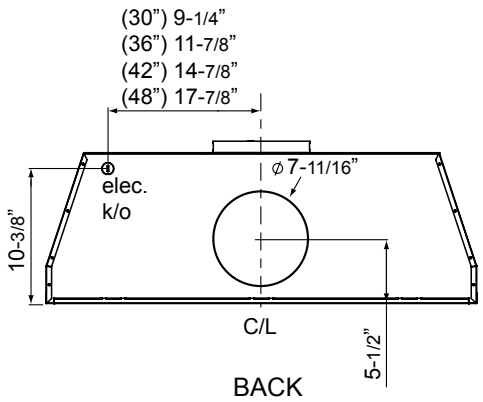

BACK

* 8” round ducting
** 10” round ducting

ZEPHYR

ZEPHYRONLINE.COM

MODEL				
Stainless Steel	AK9428BS	AK9434BS	AK9440BS	AK9446BS
Size	30" (28-3/8" x 19-3/8")	36" (34-3/8" x 19-3/8")	42" (40-3/8" x 19-3/8")	48" (46-3/8" x 19-3/8")
BLOWER PERFORMANCE				
Included Blower CFM (Min. - Max.)	200 - 700	200 - 700	200 - 700	200 - 700
Sones (Min. - Max.)	0.8 - 6	0.8 - 6	0.8 - 6	0.8 - 6
ACT 590 CFM (Min. - Max.)	200 - 590	200 - 590	200 - 590	200 - 590
ACT 390 CFM (Min. - Max.)	200 - 390	200 - 390	200 - 390	200 - 390
ACT 290 CFM (Min. - Max.)	200 - 290	200 - 290	200 - 290	200 - 290
Optional Dual Blower (Min. - Max.)	NA	300 - 1,300, 1-8 Sones	300 - 1,300, 1-8 Sones	300 - 1,300, 1-8 Sones
FEATURES				
Zephyr Connect App Compatible	Yes	Yes	Yes	Yes
Alexa & Google Home Compatible	Yes	Yes	Yes	Yes
ACT™ Technology	590, 390, 290 Single Blower Only	590, 390, 290 Single Blower Only	590, 390, 290 Single Blower Only	590, 390, 290 Single Blower Only
Controls	Proximity Touch	Proximity Touch	Proximity Touch	Proximity Touch
Speed Levels	6*	6*	6*	6*
Auto Delay-Off	Yes	Yes	Yes	Yes
CleanAir Function	Yes	Yes	Yes	Yes
Lighting	LumiLight LED, 6W x2	LumiLight LED, 6W x2	LumiLight LED, 6W x2	LumiLight LED, 6W x4
Tri-Level Lighting	Yes	Yes	Yes	Yes
Filters	Pro Baffle x2	Pro Baffle x2	Pro Baffle x2	Pro Baffle x3
Removable Grease Tray	Yes	Yes	Yes	Yes
Recirculating Option	No	No	No	No
ADA Compliant	Yes, with Zephyr Connect or Remote	Yes, with Zephyr Connect or Remote	Yes, with Zephyr Connect or Remote	Yes, with Zephyr Connect or Remote
DUCT SPECIFICATIONS				
Vertical Single Internal Blower	8" Round	8" Round	8" Round	8" Round
Horizontal Single Internal Blower	8" Round	8" Round	8" Round	8" Round
Vertical Dual Internal Blower	NA	10" Round	10" Round	10" Round
Horizontal Dual Internal Blower	NA	NA	NA	NA
AC POWER (Single Blower)	120V, 60Hz at Max. 5A	120V, 60Hz at Max. 5A	120V, 60Hz at Max. 5A	120V, 60Hz at Max. 5A
AC POWER (Dual Blower)	NA	120V, 60Hz at Max. 8A	120V, 60Hz at Max. 8A	120V, 60Hz at Max. 8A
OPTIONAL ACCESSORIES				
Wireless Remote Control	14000005	14000005	14000005	14000005
Dual Internal Blower	NA	PBD-1300B	PBD-1300B	PBD-1300B
Make-Up Air Kit (Single Blower)	MUA008A	MUA008A	MUA008A	MUA008A
Make-Up Air Kit (Dual Blower)	MUA010A	MUA010A	MUA010A	MUA010A
MOUNTING HEIGHT RANGE**	24" - 36"	24" - 36"	24" - 36"	24" - 36"
WARRANTY	3 years parts, 1 year labor	3 years parts, 1 year labor	3 years parts, 1 year labor	3 years parts, 1 year labor

*When ACT™ is enabled the maximum speed levels will change. ACT 590 CFM = 5 speeds, ACT 390 CFM = 4 speeds and ACT 290 CFM = 3 speeds.
**Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

Zephyr Connect App
Zephyr Connect App allows you to control your range hood from anywhere using your mobile device. It includes real time diagnostics and provides important product information. All you need is a WiFi connection with access to the internet. It seamlessly integrates with your smart devices such as Amazon Alexa or Google Home smart speaker for voice activation. Available to download from Google Play or the App Store.

ACT™

PowerWave™

Airflow Control Technology™ (ACT™)
is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

PowerWave™ 3-Phase Blower Technology
delivers best-in-class performance with unparalleled quiet operation. It provides more power while minimizing noise and improving efficiency.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

JUN24.0101

c UL us

DWHD640EPR
EMERALD® DISHWASHER
CUSTOM PANEL



Home Connect

Also Available:

DWHD640EFP – Flat Stainless Steel Panel with Professional Collection Handle

DWHD640EFM – Flat Stainless Steel Panel with Masterpiece® Collection Handle

FEATURES & BENEFITS

- Chef's Tool Drawer® (3rd Rack) is designed to make loading and unloading tools and hard to place items extraordinarily easier
- Three stage advanced filtration recirculates water for sparkling results
- 3-Level adjustable upper rack is customizable for all of your needs, designed to be raised for extra large items placed on the bottom rack, or lowered to fit taller wine glasses on the upper rack
- Extra Dry Option adds extra heat to the final rinse to enhance drying results
- Impressively Quiet — 48 dBA for peaceful kitchen experience
- Use the exclusive Home Connect® app to refine your cleanup routine with remote control and receive timely notifications that keep track of every dish tab so you never run out

GENERAL PROPERTIES	
Number of Wash Cycles	6 (Auto, Normal, Quick, Hand Wash, Pots & Pans, Favorite)
Additional Wash Cycles in Home Connect®	2 (Machine Care, Rinse)
Number of Options	4 (Remote Start, Sanitize, Power Boost, Extra Dry)
Additional Options in Home Connect®	1 (Save Time)
NSF®-Certified* Sanitize Option	Yes
dBA	48
Third Rack	Chef's Tool Drawer®
Rack Adjustability	Rackmatic 3-Stage
Tub Material	Stainless Steel
Concealed Water Heating Element	Yes
Leak Protection System	24/7 AquaStop®
Water Softener	No
Five-Level Wash	Yes
Childlock	No
Home Connect® (Wi-Fi Enabled)	Yes
EFFICIENCY	
Water Usage Per Cycle	3.2 g
CEE Energy Efficiency Class	Tier 1
ENERGY STAR® Certified	Yes
Total Annual Energy Consumption	240 kWh
Total Annual Water Consumption	623.5 g
CAPACITY	
Number of Place Settings	16
TECHNICAL DETAILS	
Watts	1,440 W
Current	12 A
Volts	120 V
Frequency	60 Hz
Power Cord Length	67"
Power Cord Install Length from Corner of Unit when Facing the Door	Left - 45" Right - 56"
Minimum Water Pressure	14 (lb/sin)
Max. Temperature for Water Intake	140° F
Length Inlet Hose	N/A
Length Outlet Hose	90.5"
DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (HxWxD)	33 7/8" x 23 9/16" x 23 3/4"
Required Cutout Size (HxWxD)	33 7/8" Min. x 24" Min. x 24"
Adjustable Feet	Yes
Net Weight	85.1 lbs


*Certification to NSF/ANSI Standard 184 for residential dishwashers


DWHD640EPR
EMERALD® DISHWASHER
CUSTOM PANEL

WARRANTY	
Limited Warranty, Entire Appliance, Parts and Labor	2 Year
Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only	3rd to 5th Year
Limited Warranty for Racks (Does Not Include Rack Components); Parts Only	3rd to 5th Year
Limited Warranty for Rust-through On Inner Tub Liner; Parts Only	Lifetime

ACCESSORIES (OPTIONAL)	
Dishwasher Installation Kit (Junction Box, 90° Elbow and Water Supply Hose)	SMZ3IN1UC
Dishwasher Supply and Drainage Hose Extension 76 3/4"	SGZ1010UC
Junction Box	SMZPCJB1UC
Cabinet Protector with Power Cord Clip	SMZEPCC1UC
Water Supply Hose	SMZSH1ABUC

DISHWASHER & CUTOUT DIMENSIONS

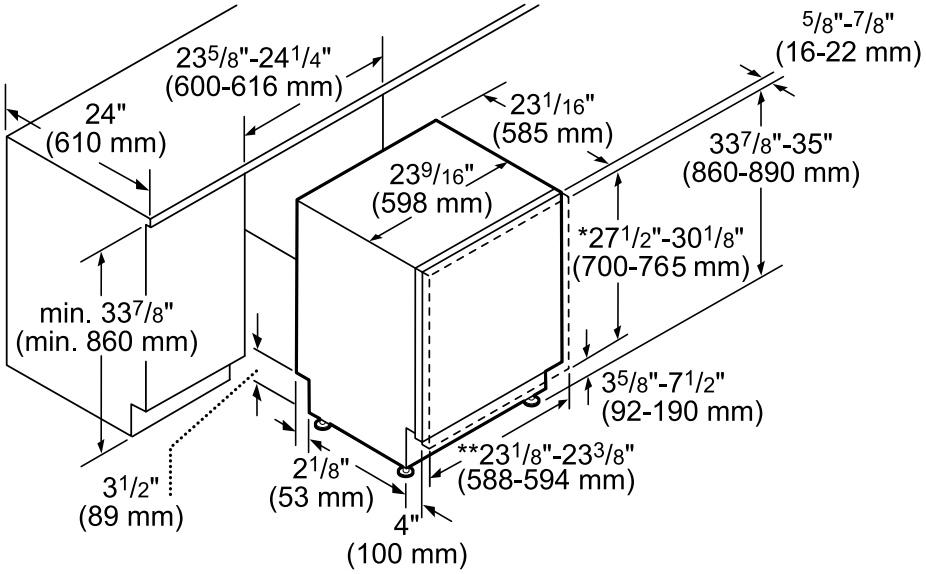

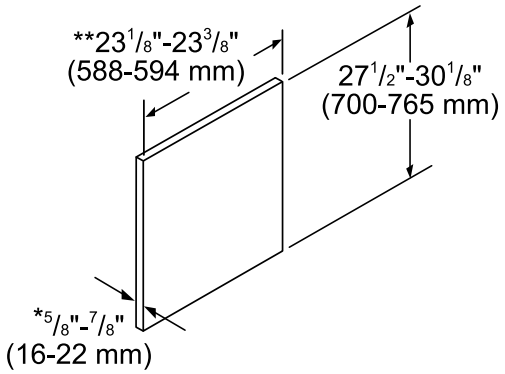

* measured from the bottom edge of the countertop panel thickness recommended 3/4" (20 mm) panel weight 11–18 lb. (5–8 kg)

** 24" (610 mm) wide panel may be used depending on cabinet design

measurements in inches and mm

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2025 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

PRESRV™

BEVERAGE COOLER

SINGLE ZONE

Complete your entertaining lineup with the Presrv™ Panel Ready Beverage Cooler, designed to harmonize seamlessly with your kitchen cabinetry. Featuring a Full-Extension Wood Rack that stores a crowd's worth of refreshments and a convenient retractable glass quarter-shelf to give you the flexibility to display taller bottles such as water, 2-liter bottles of soda, or champagne. Set the party mood with an illuminated control panel and new vertical LED light strips in three colors and four light levels.

ZEPHYR

ZEPHYRONLINE.COM



Shown with overlay panel *(not included)* and matte black handle *(optional accessory)*



Full-Extension Wood Rack



Shown with optional solid panel ready door accessory, PRPNLC24A

How Presrv™ Stands Out:


PreciseTemp™
Multiple internal sensors help maintain accurate temperatures and increase overall performance

Vibration Dampening System
Enhanced technology ensures noise and vibration is reduced to minimize wine disturbance

Active Cooling Technology
An on-board computer controls an active cooling fan to provide temperature stability and even cooling

3-Color LED Lighting
Available in Cloud White, Deep Blue and Amber

Overlay Panel Dimensions - *panel not included*

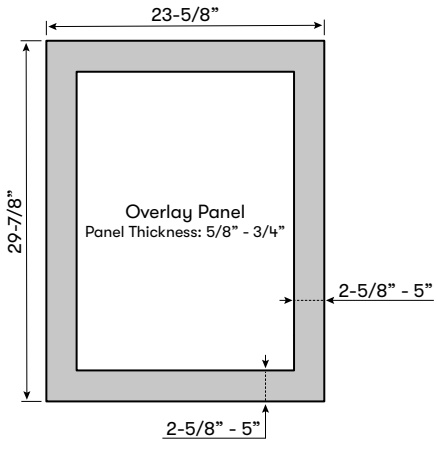

PRESRV™


BEVERAGE COOLER

SINGLE ZONE


ZEPHYR

ZEPHYRONLINE.COM


MODEL	
Single Zone Beverage Cooler	PRB24C01CPG
Size	24”
Dimensions	23-7/8”W x 33-7/8”H x 23-3/4”D*
Weight	110lbs.
Installation Type	Compact / Built-in / Freestanding
Refrigerant Type	R600a
FEATURES	
Capacity	7 bottles (750 ml), 108 12oz cans or 13 bottles (750 ml), 80 12oz cans
Volume	5.6 cu/ft
Temperature Range	34° - 50° F
Sound Level	39 dBA
Door Finish	Panel Ready + Glass
Cabinet Finish	Black
Interior Finish	Black
Field-Reversible Door	Yes
Zero-Clearance Door Hinges	Yes
Door Glass	Dual-pane, Low-E Argon-filled
Shelving - Wood	1 full-extension, black wood rack
Shelving - Beverage	1 adjustable, transparent-gray glass retractable quarter-shelf 1 adjustable, transparent-gray glass shelf w/ airflow openings
Controls	3-Color Electronic Touch
Lighting	3-Color LED Light Strips Cloud White, Deep Blue, Amber
Four Light Levels	Yes
Panel Ready	Yes, ⅝” or ¾” thickness (panel not included)
Door Open Alarm	Yes, after 3 minutes
Door Lock	Yes
Sabbath Mode	Yes
Air Filtration	Yes, w/ carbon filter
PreciseTemp™	Yes
Active Cooling Technology	Yes
Vibration Dampening System	Yes
AC POWER	115V, 60Hz at Max. 1.5A
OPTIONAL ACCESSORIES	
Contemporary Handle	PRHAN-C101 (Stainless Steel)
Contemporary Handle	PRHAN-C102 (Brushed Gold)
Contemporary Handle	PRHAN-C104 (Matte Black)
Pro Handle	PRHAN-C001 (Stainless Steel)
Pro Handle	PRHAN-C003 (Brushed Gold)
Pro Handle	PRHAN-C004 (Matte Black)
Solid Panel Ready Door**	PRPNLC24A
Glass Shelf	50150027
Adjustable Drink Caddy	PRDC-C03
WARRANTY	2 years parts, 2 years labor 5 years compressor

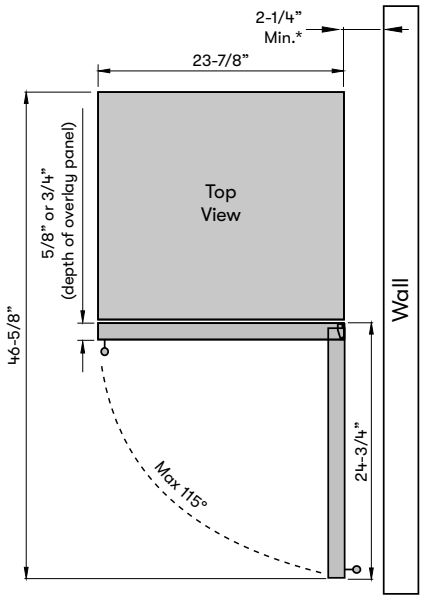

*When using an optional Zephyr handle

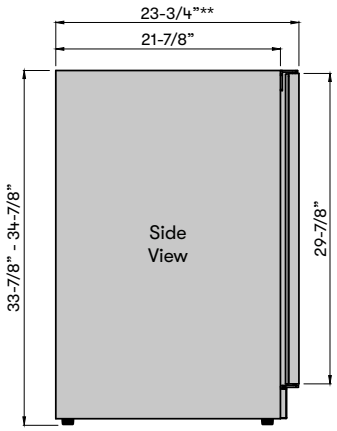

**Depth with 3/4” thick overlay panel

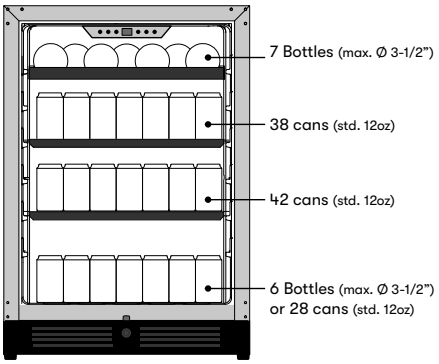

*Depth dimension based on ¾” thick panel

**Prefer a solid door panel? We’ve got you covered. Purchase the solid panel ready door, pictured on page 1, for a more integrated installation. *See solid panel ready door spec for more information.*

Transforming the Kitchen through Design, Discovery, and Care

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.8368

JAN25.0101

Scotsman
The Ideal Ice®

SRN110 – 110 lb Nugget Ice Machine

SRN110 – 110 lb Nugget Ice Machine

Brilliance® Under-Counter Nugget Ice Machine



Features

- 15" cabinet width, produces up to 110 lbs. of nugget ice in 24 hours
- Uses 40% less energy and more than 50% less water than gourmet cube ice machines
- Accepts custom wood panel to match surrounding cabinetry
- Approved for indoor or outdoor use
- Lighted bin
- Concealed door hinge system
- User-friendly control panel informs whether power is on, alerts a no-water condition, and time to clean reminder
- Available with built-in drain pump
- Field reversible door
- **Protected with AgION®, a silver-based antimicrobial compound molded into key ice machine components in order to guard internal surfaces between cleanings.**

24 Hour Ice Production & Storage Capacity

70ºF/21ºC Air 50ºF/10ºC Water lb / kg	90ºF/32ºC Air 70ºF/21ºC Water lb / kg	Bin Storage Capacity lb / kg
110 / 49.9	80 / 36.3	26 / 12

CERTIFIED ISO 9001:2015

DESIGNED ENGINEERED ASSEMBLED IN THE USA

Intertek

agion Nature's antimicrobial

Control Board



Scoop



- Units installed in elevations greater than 3,000 feet or 900 meters above sea level require an altitude adjustment to maintain proper ice level.





Nugget Ice



The Original Chewable Ice™. Soft ice ideal for beverages and blended drinks.


Warranty

- 2 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

Scotsman
The Ideal Ice

SRN110 – 110 lb Nugget Ice Machine

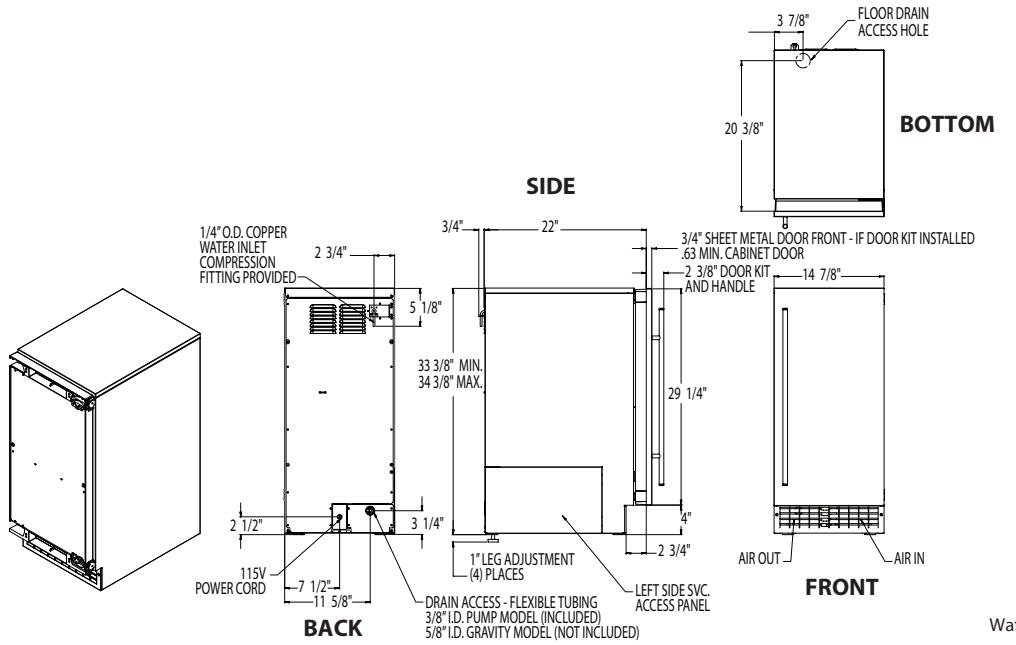

Water Supply Line Not Included

All Models

24 Hour Ice Production:
(70º Air/50º Water) 110 lb / 49.9 kg
(90º Air/70º Water) 80 lb / 36.2 kg

Bin Storage Capacity: 26 lb / 12 kg

Condenser Type: Air

Basic Electrical: (Volts/Hz/Phase) 15a dedicated circuit required 115/60/1

Amps: 5


Refrigerant: R290

Dimensions (W x D x H):
Unit (without legs adjusted):
14.875" x 22" x 33.375"
(37.8 x 57.8 x 84.78 cm)

Shipping Carton: 18" x 28" x 38"
(45.7 x 71.1 x 96.5 cm)

Specifications

Model	Finish Cabinet / Front	Drain Type	Shipping Weight lb / kg
SRNG110A-1SU	Stainless Steel / Unfinished	Gravity	124 / 56
SRNG110A-1SS	Stainless Steel / Stainless Steel	Gravity	133 / 60
SRNP110A-1SU	Stainless Steel / Unfinished	Pump	129 / 59
SRNP110A-1SS	Stainless Steel / Stainless Steel	Pump	138 / 63

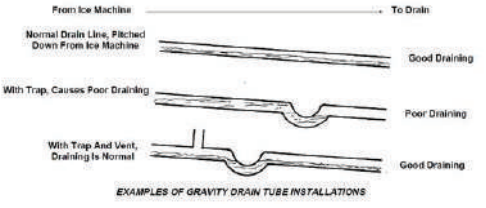

SRNG: Gravity flow drain tube
SRNP: Built-in pump to expel drain water which includes 10' drain tube

Accessories

Model	Description	Shipping Weight lb / kg
KDFS	Stainless Steel Door Front Kit	12 / 5.5
KATB	Anti-Tip Bracket Kit	2 / 0.9
KDFR	Retro-Fit Door Front Kit	8 / 3.6
19-0664	Clear One Pre-Mixed Scale Remover	

Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	90°F (38°C)
Water Pressures	20 PSIG (1 bar)	80 PSIG (5 bar)
Electrical Voltage	-10%	+10%

Machine requires voltage indicated on the rating nameplate. Scotsman SRC065 and SRN110 models are approved for outdoor installations. All products must operate where air temperature does not fall below 50ºF and does not exceed 100ºF. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Failures caused by improper installation are not considered factory defects. Refer to owner's manual for complete installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.

● 101 Corporate Woods Parkway, Vernon Hills, IL 60061 ● 1-800-SCOTSMAN ● www.scotsmanhomeice.com ●

© 2025 Scotsman Ice Systems.

WELBILT
an Ali Group Company

CUSTOM PANEL INSTRUCTIONS FOR BRILLIANCE MODELS SRN110, SRC065 & SRC035

A custom panel of wood or other material not exceeding 15 lbs. can be attached to the door. Attachment is from the ice side of the door. Holes are provided in the door for this purpose.


- Panel width: 14 7/8"
- Panel height: Between 29 3/8" and 30 3/8"
- Panel thickness: 5/8" to ¾"

To create and attach a custom panel:

1. Measure overall height of cabinet opening where ice machine will be (floor to bottom of countertop edge).
2. Determine desired kickplate space (from bottom of door to floor). This could be equal to the adjacent cabinet's kickplate space or another space the user wants.
3. Subtract kickplate space from cabinet opening.
4. Subtract 1/8" or more for clearance space between top of door and bottom of countertop edge from cabinet opening. This is the maximum door length.
5. Cut panel to width.
6. Cut panel to length (cabinet space - kickplate space - top clearance = length).
7. Determine top of panel.
8. Mark hole locations using dimensions on the drawing on page 2 of these instructions. Drawing assumes top of panel will be flush with top of door. Measure hole locations from the top of the panel.
9. Drill pilot holes for wood screws. Use drill stop to prevent drilling through the panel.
10. Mount panel to door using wood screws or supplied panel mounting screws.

Note: When installed, ice machine must be adjusted for height to position top of door to desired clearance.

DOOR PANEL INSTRUCTIONS

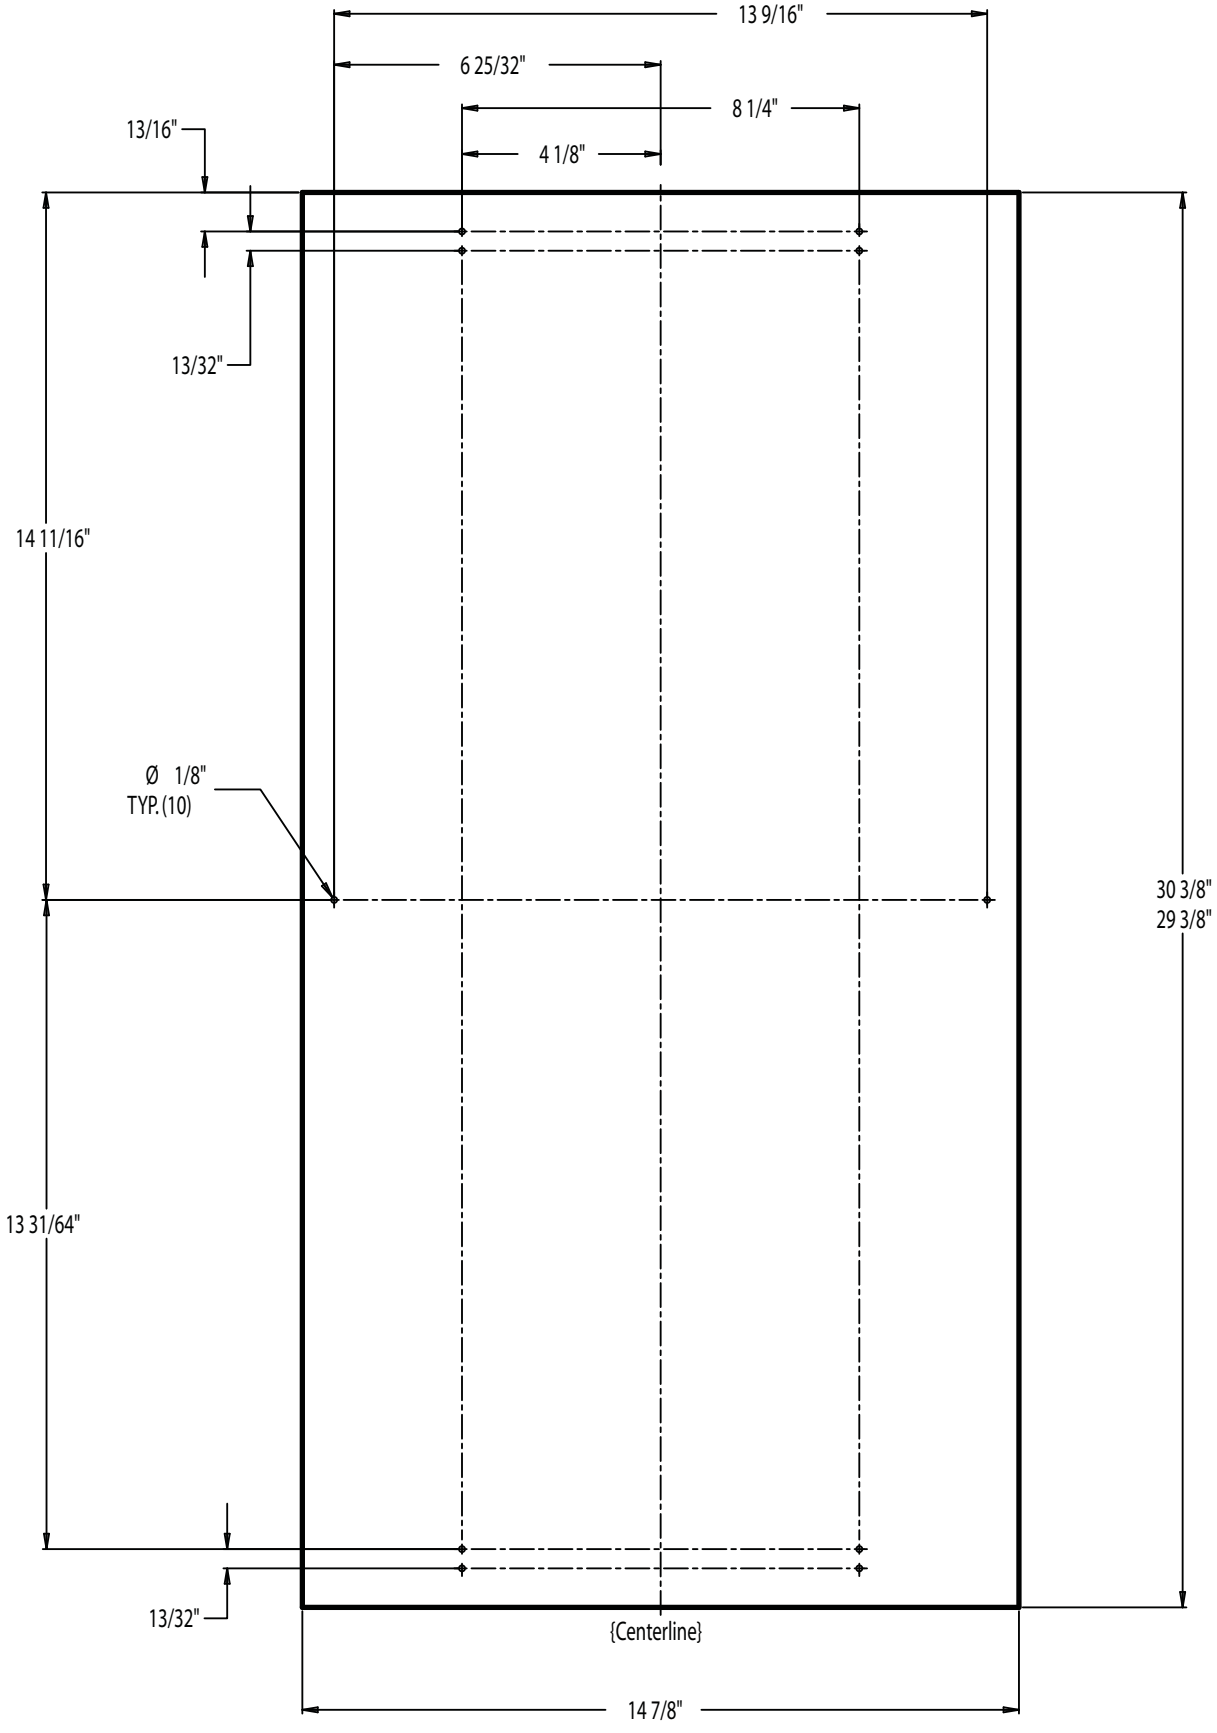

FRIGIDAIRE
GALLERY



22.3 Cu. Ft. 36" Counter Depth Side by Side Refrigerator

Side-By-Side Refrigerator

Available Products: GRSC2352AD, GRSC2352AF

Available Colors: Black Stainless Steel, Stainless Steel

Version: 08/22

Product Specifications

Refrigerator

Crisper Color	Clear
Dairy Bin	Yes
Deli Drawer	Yes
Door Bin Color	Clear
Humidity Controls	Manual
Interior Lighting	LED
Shelf Material	Glass
Water Filter	Yes
Number of Adjustable 2 Liter Door Bins	2
Number of Fixed Condiment Door Bins	1
Number of Fixed Gallon Door Bins	1
Total Number of Door Bins	4
Number of Adjustable Shelves	3
Number of Crispers	2
Air Filtration	Yes
Air Filter Included	Yes

Ice Maker

Ice Maker	Yes

Dispenser

Dispenser Height	8 9/10"
Crushed Ice	Yes
Cube Ice	Yes
Dispenser	Yes
Water	Yes

Dimensions and Volume

Height With Hinge	69 7/8"
Height Without Hinge	68 5/8"
Width	36 1/8"
Width of Cabinet	35 7/8"
Depth of Cabinet	23 7/8"
Depth With Door	28 1/2"
Depth With Door 90° Open	45"
Depth With Door and Handle	31"
Fresh Food Capacity	14.3 Cu. Ft.
Freezer Capacity	8 Cu. Ft.
Total Capacity	22.3 Cu. Ft.

Freezer

Automatic Defrost	Yes
Baskets / Bins Color	Clear
Door Bin Color	Clear
Interior Lighting	LED
Pizza / Ice Cream Shelf	Yes
Shelf Material	Glass
Number of Adjustable Door Bins	4
Number of Baskets / Bins	2
Total Number of Door Bins	4
Number of Fixed Shelves	3
Total Number of Shelves	3

Controls

Air Filter Indicator	Yes
Digital Display	No
Door Ajar Alarm	Yes
Control Lock	Yes
Ice Maker On/Off	Yes
On/Off Display	Yes
Power Failure Alarm	Yes
Sabbath Mode	Yes
Water Filter Indicator	Yes

Exterior

Counter-Depth	Yes
Front Rollers	Yes
Rear Rollers	No
Water Inlet Location	Right Bottom Rear

Electrical Specifications

Minimum Circuit Required	15 Amps

Certifications and Approvals

ADA Compliant*	Yes

Safety Certifications and Approvals

cUL Listed	Yes

***ADA Compliant Disclaimer** *Accessibility pursuant to Uniform Federal Accessibility Standards (UFAS) when used with optional water filter bypass.*

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

22.3 Cu. Ft. 36" Counter Depth Side by Side Refrigerator	Side-By-Side Refrigerator
Available Products: GRSC2352AD, GRSC2352AF	Available Colors: Black Stainless Steel, Stainless Steel
Version: 08/22	

General Specifications

Annual Energy	615 kWh
Leveling Legs	Yes
Prop 65 Label	Yes
Refrigerant Type	R-600A
Warranty - Labor	1 Year
Warranty - Parts	1 Year


Performance Certifications and Approvals


ENERGY STAR Certified	Yes

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

22.3 Cu. Ft. 36" Counter Depth Side by Side Refrigerator	Side-By-Side Refrigerator
Available Products: GRSC2352AD, GRSC2352AF	Available Colors: Black Stainless Steel, Stainless Steel
Version: 08/22	


Installation Diagram

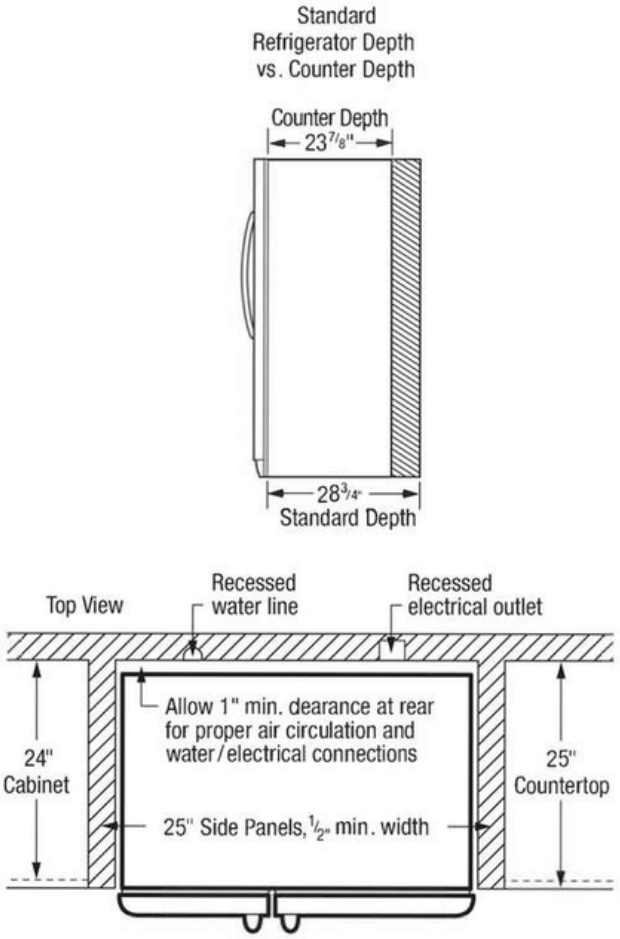

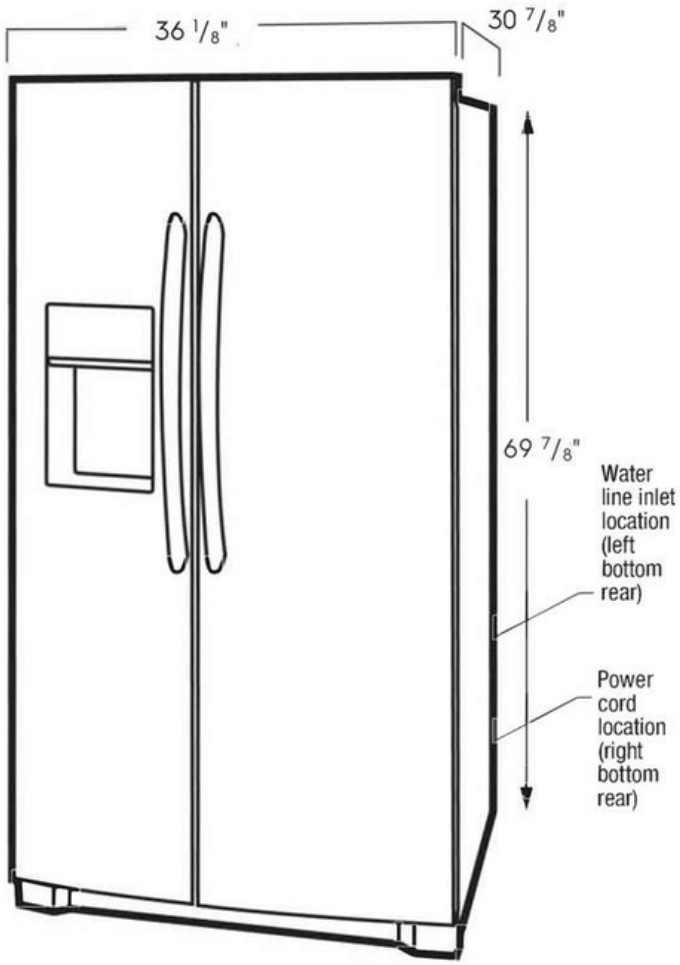

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FRIGIDAIRE

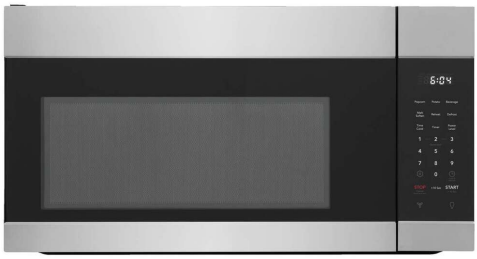

1.7 Cu. Ft. Over-The-Range Microwave

Over-The-Range Microwave

Available Products: FMOS1746BS, FMOS1746BB, FMOS1746BW

Available Colors: Stainless Steel

Version: 09/24

Product Specifications

Cooking Controls

Clock	Yes
Cooking Power	1000 Watts
Defrost Time	Yes
Defrost Weight	Yes
Number of Power Levels	10

Ventilation System

Exhaust Fan Speeds	2
Maximum Air Flow Capacity	300 CFM
Minimum Air Flow Capacity	105 CFM
Maximum Sones Rating	7 sone
Minimum Sones Rating	2.5 sone
Grease Filter Included	Yes
Grease Filter Quantity	2
Grease Filter Dishwasher Safe	Yes
Removable Grease Filter	Yes
Charcoal Filter Included	Yes
Ducted Vent	Yes
Ductless Vent	Yes

Microwave Control Features

+ 10 Seconds	Yes
+ 30 Seconds	Yes
Quick Start	Yes

Display

Control Location	Right
Display Interface Color	White
Display Type	Membrane

Internal Specifications

Interior Color	White
Interior Light Quantity	1
Interior Light Type	Incandescent
Interior Light Wattage	20 Watts
Turntable Diameter	12 2/5"
Turntable Material	Glass

Microwave Cooking

Beverage	Yes
Melt / Soften	Yes
Popcorn	Yes
Potato	Yes
Reheat	Yes

Controls

Control Lock	Yes

Additional Settings

Child Lock	Yes
Clock Display On / Off	Yes
Clock Settings	Yes
Demo On / Off	Yes
Setting Weight Lb / Kg	Yes
Surface Cooking Light	Yes
Timer On / Off	Yes
Vent Fan	Yes

Exterior

Door Swing	Side-Swing Door

Surface Light System

Lighting Type	Incandescent

Electrical Specifications

Amps @ 120 Volts	13.5 Amps
Connected Load @ 120V	1.55 kW
Voltage Rating	120 V
Watts @ 120 Volts	1500 Watts

General Specifications

Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

1.7 Cu. Ft. Over-The-Range Microwave	Over-The-Range Microwave
Available Products: FMOS1746BS, FMOS1746BB, FMOS1746BW	Available Colors: Stainless Steel
Version: 09/24	

Dimensions and Volume

Height	16 7/16"
Width	29 7/8"
Depth	15 7/16"
Depth With Door 90° Open	38 13/16"
Microwave Interior Height	9 7/8"
Microwave Interior Width	20 7/8"
Microwave Interior Depth	14 9/16"
Microwave Capacity	1.7 Cu. Ft.

Installation

Power Supply Connection Location	Right Top


Safety Certifications and Approvals

UL Listed	Yes

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

1.7 Cu. Ft. Over-The-Range Microwave	Over-The-Range Microwave
Available Products: FMOS1746BS, FMOS1746BB, FMOS1746BW	Available Colors: Stainless Steel
Version: 09/24	

Installation Diagram

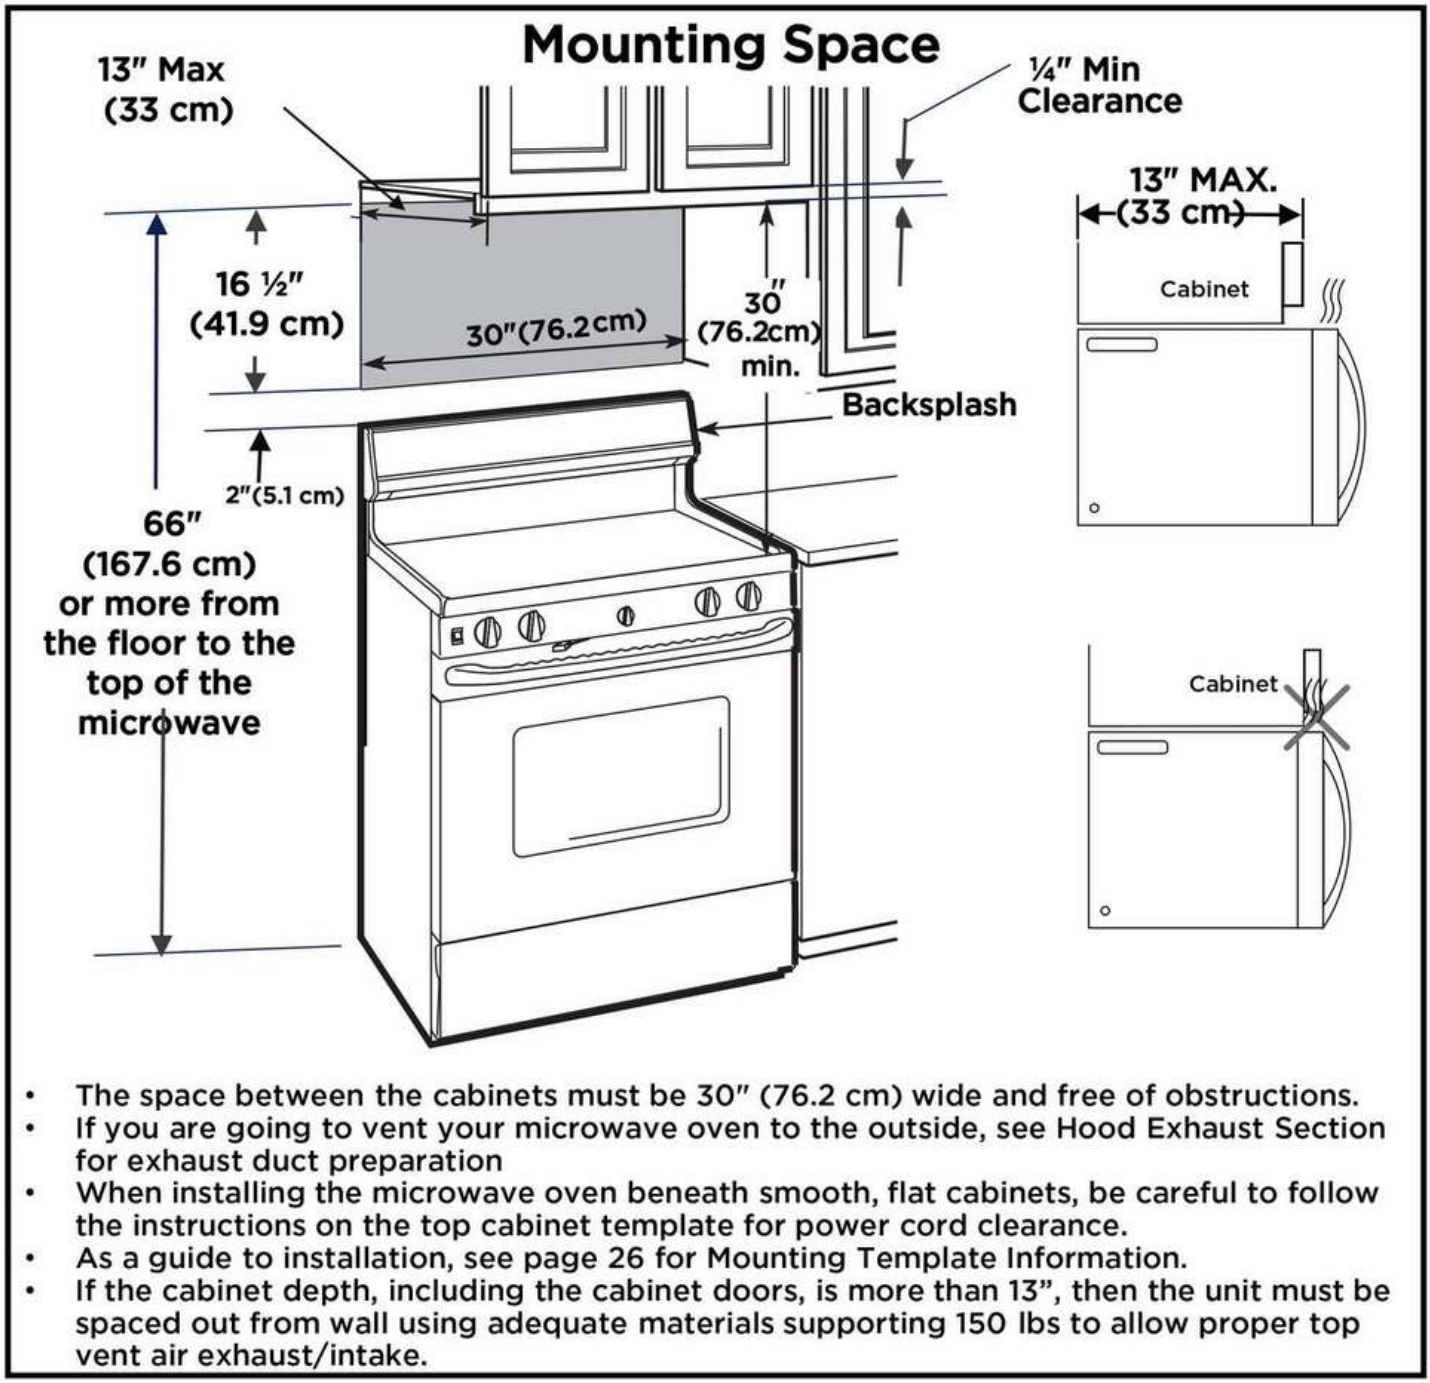

- The space between the cabinets must be 30" (76.2 cm) wide and free of obstructions.
- If you are going to vent your microwave oven to the outside, see Hood Exhaust Section for exhaust duct preparation
- When installing the microwave oven beneath smooth, flat cabinets, be careful to follow the instructions on the top cabinet template for power cord clearance.
- As a guide to installation, see page 26 for Mounting Template Information.
- If the cabinet depth, including the cabinet doors, is more than 13", then the unit must be spaced out from wall using adequate materials supporting 150 lbs to allow proper top vent air exhaust/intake.

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FRIGIDAIRE



30" Electric Range with EvenTemp™

Electric Range

Available Products: FCRE3062AB, FCRE3062AS, FCRE3062AW

Available Colors: Black, Stainless Steel, White

Version: 11/23

Product Specifications

Cooking Controls

Bake	Yes
Broil	Yes
Clock	Yes
Cook Time	Yes
Delay Clean	Yes
Delay Start	Yes
Keep Warm	Yes
Kitchen Timer	Yes
Light	Yes
Lockout	Yes
Off	Yes
Oven Light	Yes
Set Clock	Yes
Start	Yes
Steam Clean	Yes
Temperature Display	Yes
Timer On / Off	Yes
Up / Down Arrow	Yes
User Preferences	Yes
Warm Zone	Yes

Oven

Bake Element	2500 Watts
Bake Element Pass	8
Bake Element Type	Hidden
Broil Element	3000 Watts
Broil Element Pass	4
Number of Rack Positions	6
Oven Interior Color	Midnight Black
Oven Light Quantity	1
Oven Light Type	Halogen
Oven Light Watts	40 Watts
Rack Position Type	Embossed
Rack Type 1	Flat
Rack Type 1 Quantity	2

Cooking Controls Function

Adjustable Volume Feedback	Yes
Change between Continuous Bake Setting or 12-Hour Energy Saving Feature	Yes
Delayed Bake	Yes
Program Fahrenheit or Celsius	Yes

Cooktop

Cooking Surface Type	Smooth
Element On Indicator Light	Yes
Hot-Surface Indicator Light	Yes
Keep Warm Zone Light	Yes

Drawer

Drawer Handle Style	Integrated
Drawer Type	Storage

Display

Control Location	Rear
Display Interface Color	White
Display Type	Membrane

Electrical Specifications

Connected Load @ 240V	12 kW
Minimum Circuit Required	40 Amps
Voltage Rating	240 V

General Specifications

Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

30" Electric Range with EvenTemp™	Electric Range
Available Products: FCRE3062AB, FCRE3062AS, FCRE3062AW	Available Colors: Black, Stainless Steel, White
Version: 11/23	

Cooktop Performance

Right Front Element Burner Size	9"
Right Rear Element Burner Size	6"
Left Front Element Burner Size (Small)	6"
Left Front Element Burner Size (Large)	9"
Left Rear Element Burner Size	6"
Right Front Element Burner	3200 Watts
Right Rear Element Burner	1200 Watts
Left Front Element Burner (Small)	1400 Watts
Left Front Element Burner (Large)	3000 Watts
Left Rear Element Burner	1200 Watts
Center Rear Element Burner	100 Watts
Keep Warm Burner Location	Center Rear

Controls

Control Lock	Yes

Dimensions and Volume

Minimum Height	46 3/4"
Maximum Height	47 3/4"
Width	30"
Depth	26"
Depth With Door 90° Open	47 5/16"
Depth With Handle	28 1/2"
Oven Interior Height	18 1/8"
Oven Interior Width	25 3/16"
Oven Interior Depth	19 7/8"
Oven Capacity	5.3 Cu. Ft.

Installation

Adjustable Leveling Legs	Yes

Safety Certifications and Approvals

UL Listed	Yes
RoHS	Yes

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

30" Electric Range with EvenTemp™	Electric Range
Available Products: FCRE3062AB, FCRE3062AS, FCRE3062AW	Available Colors: Black, Stainless Steel, White
Version: 11/23	

Installation Diagram

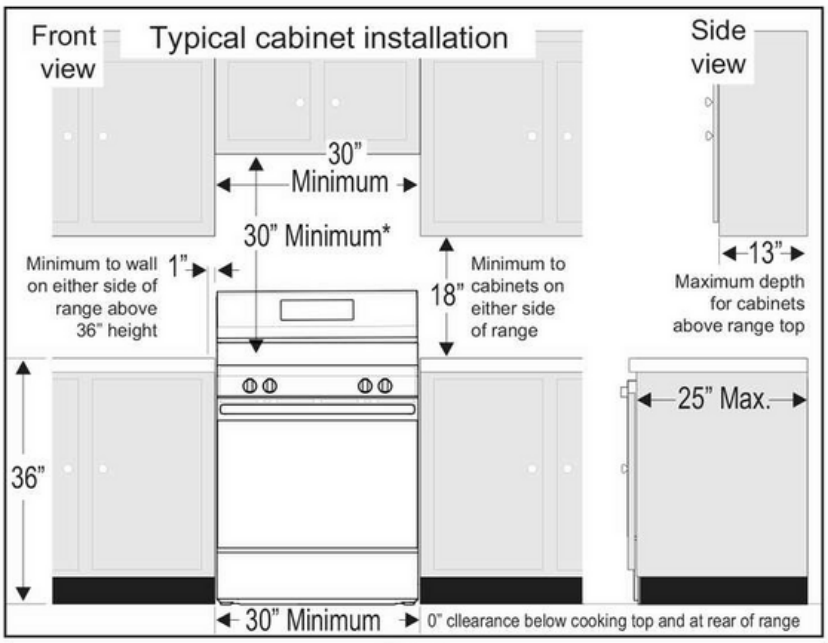


Fig. 1


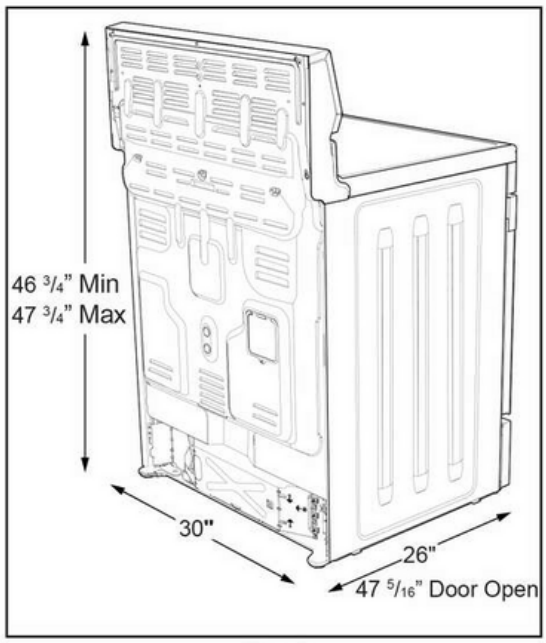


Fig. 2

*30" (762 mm) MINIMUM CLEARANCE BETWEEN THE TOP OF THE COOKING SURFACE AND THE BOTTOM OF AN UNPROTECTED WOOD OR METAL CABINET; OR 24" (610 mm) MINIMUM WHEN BOTTOM OF WOOD OR METAL CABINET IS PROTECTED BY NOT LESS THAN 1/4" (6 mm) FLAME RETARDANT MILLBOARD COVERED WITH NOT LESS THAN NO. 28 MSG SHEET STEEL, 0.015" (0.4 mm) STAINLESS STEEL, 0.024" (0.6 mm) ALUMINUM OR 0.020" (0.5 mm) COPPER. 0" (0 mm) CLEARANCE IS THE MINIMUM FOR THE REAR OF THE RANGE. FOLLOW ALL DIMENSION REQUIREMENTS PROVIDED ABOVE TO PREVENT PROPERTY DAMAGE, POTENTIAL FIRE HAZARD, AND INCORRECT COUNTERTOP AND CABINET CUTS.

TO ELIMINATE THE RISK OF BURNS OR FIRE BY REACHING OVER HEATED SURFACE UNITS, CABINET STORAGE SPACE LOCATED ABOVE THE SURFACE UNITS SHOULD BE AVOIDED. IF CABINET STORAGE IS TO BE PROVIDED, THE RISK CAN BE REDUCED BY INSTALLING A RANGE HOOD THAT PROJECTS HORIZONTALLY A MINIMUM OF 5" (127 mm) BEYOND THE BOTTOM OF THE CABINETS.

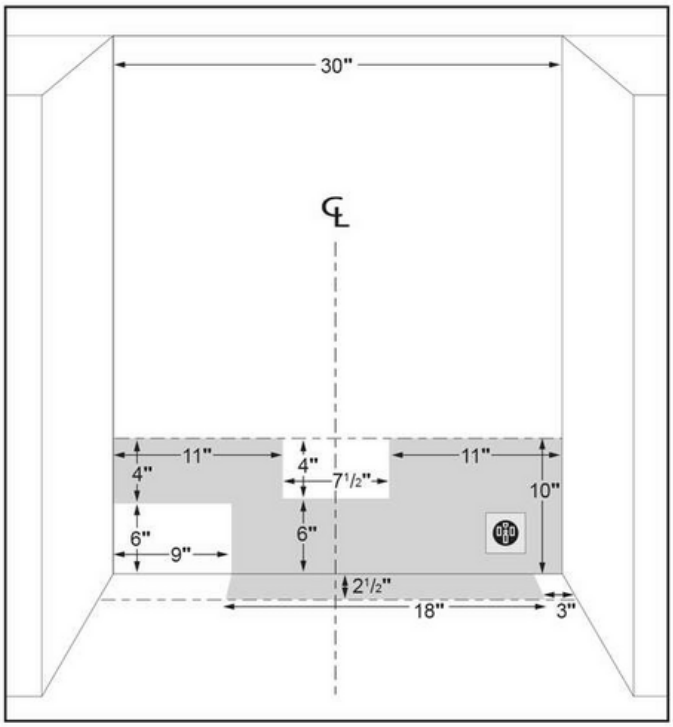

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FRIGIDAIRE



24" Built-In Dishwasher

Dishwasher

Available Products: FFCD2413UB, FFCD2413US, FFCD2413UW

Available Colors: Black, Stainless Steel, White

Version: 10/23

Product Specifications

Dishwasher

Detergent Dispenser	Yes
Filter Material	Stainless Steel
Filter Trap	Removable
Filtered Water	100 %
Hard Food Disposer or Filtration	Yes
Motor Speeds	Single-Speed
Place Setting Capacity	14
Rinse Aid Dispenser	Yes
Lower Spray Arm	Bi-Beam
Middle Spray Arm	Bi-Beam
Upper Spray Arm	Spray Arm
Tub Design	Tall Tub
Tub Material	Plastic
Wash Levels	5
Wash System	Direct Feed
Water Pressure	120 psi
Water Usage	6 Gallons

Dishwasher Options

Drying System	Static Vent
Heated Dry	Yes
High Temperature	Yes
Start/Cancel	Yes

Upper Rack

Minimum Height Clearance	8"

Exterior

Door and Handle Design	Pocket
Door Latch	Squeeze

Electrical Specifications

Voltage Rating	120 V

General Specifications

Sound Level	55 dBA
Annual Energy	240 kWh
Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Dishwasher Cycles

Heavy	Yes
Light	Yes
Normal	Yes
Number of Cycles	3
Upper Rack	Yes

Lower Rack

Maximum Height Clearance	13"
Minimum Height Clearance	11"
Number of Silverware Basket	1
Rack Type	Basic

Controls

Delay Start Hours	4 Hours
Control Lock	Yes

Dimensions and Volume

Minimum Height	33 1/2"
Maximum Height	35"
Width	24"
Depth	25"
Depth With Door Open	49 1/4"

Installation

Number of Leveling Legs	4

Performance Certifications and Approvals

CEE Tier	Tier 1
ENERGY STAR Certified	Yes

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

24" Built-In Dishwasher	Dishwasher
Available Products: FFCD2413UB, FFCD2413US, FFCD2413UW	Available Colors: Black, Stainless Steel, White
Version: 10/23	


Safety Certifications and Approvals


UL Listed	Yes
Meets ASSE 1006 Requirements	Yes
NSF Certified	No

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

24" Built-In Dishwasher	Dishwasher
Available Products: FFCD2413UB, FFCD2413US, FFCD2413UW	Available Colors: Black, Stainless Steel, White
Version: 10/23	

Installation Diagram

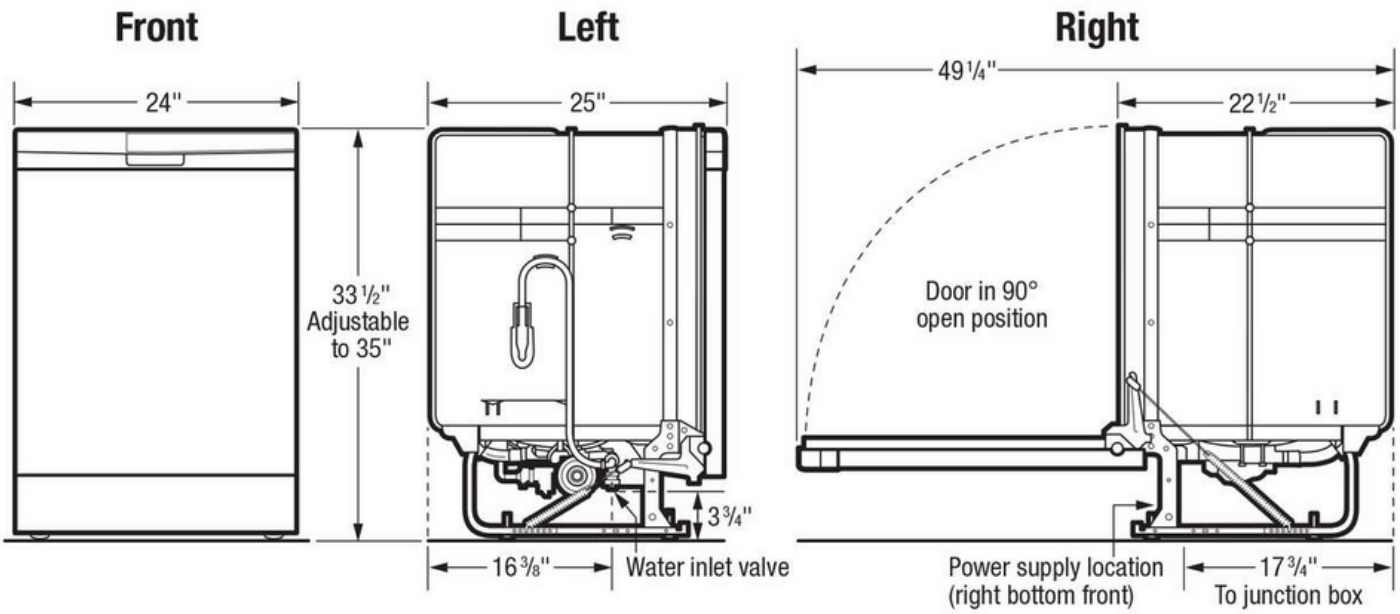

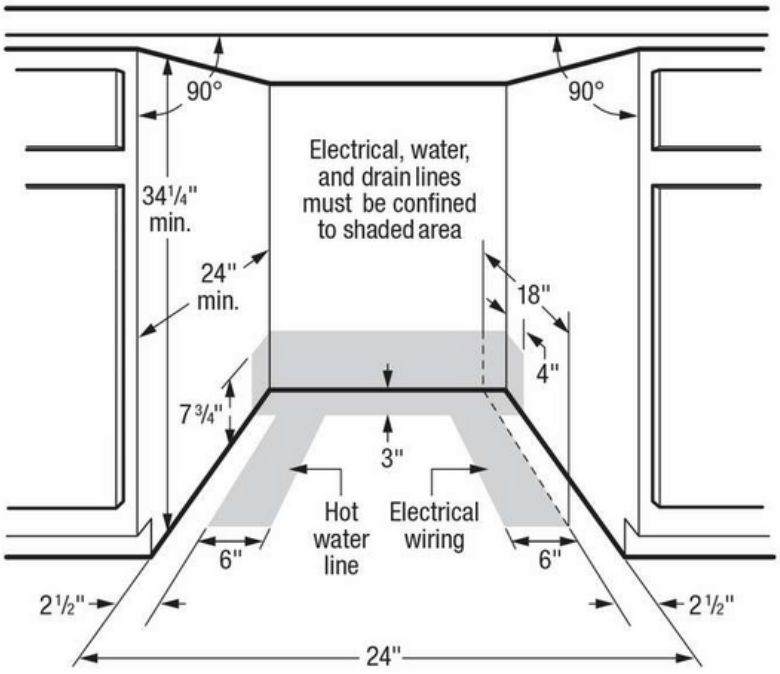

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.
USA • 10200 David Taylor Drive •Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

LG Life's Good

LG LAUNDRY

WKEX200H_A / WKGX201H_A

Single Unit LG WashTower™ with Center Control™
4.5 cu. ft. Front Load Washer and 7.4 cu. ft. Dryer

Ultra Large Capacity 4.5 cu. ft. Washer and 7.4 cu. ft. Dryer
Single Unit WashTower™ Design
Full Touch Electronic Center Control™ Panel with LED Display
Smart Pairing
Advanced Drying - AI Sensor Dry™ and TurboSteam™
Advanced AI DD™ Washing - TurboWash® 360 and Steam Technology
AAFA Certified Washer with Allergiene™ Cycle
Tempered Glass Door
ENERGY STAR® Certified
ThinQ® Technology with ThinQ Care



AVAILABLE COLORS

- WHITE
- BLACK STEEL
- NATURE GREEN
- CANDY APPLE RED

ThinQ Care

Proactive Smart Alerts to Keep Your Appliances Running Smoothly

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

SUMMARY	Washer	Dryer
Type	Front Load Washer	Front Load Dryer
Capacity (cu.ft.)	4.5 cu. ft.	7.4 cu. ft.
Color	White (W), Black Steel (B), Nature Green (G), Candy Apple Red (R)	

APPEARANCE	Washer	Dryer
Touch Buttons	Yes	
Full Touch Electronic Control Panel with LED Display	Yes	
Center Control™	Yes	

ENERGY	Washer	Dryer
ENERGY STAR® Certified	Yes	
CEE Tier	Tier 2	-
IMEF	2.92	-
IWF	2.9	-
CEF	-	Electric: 3.94 Gas: 3.49

PROGRAMS	Washer	Dryer
No. of Programs	6	6
	Normal, Bedding, Delicates, Heavy Duty, Speed Wash®, Downloaded	Normal, Bedding, Delicates, Heavy Duty, Small Load, Downloaded

OPTIONS	Washer	Dryer
No. of Options	10	9
	TurboWash®, Steam, Extra Rinse, Pre-wash, Sanitary*, Tub Clean*, Drum Light*, Control Lock*, Signal*, Wi-Fi* / Remote Start*	Wrinkle Care, Steam, Reduce Static, Energy Saver, Steam Fresh*, Drum Light*, Control Lock*, Signal*, Wi-Fi* / Remote Start*

DETAILS	Washer	Dryer
No. of Wash/Rinse Temps	5	-
Wash/Rinse Temps	Hot, Very Warm, Warm, Cool, Cold	-
No. of Spin Speeds	5	-
Spin Speeds	High, Medium/High, Medium, Low, No Spin	-
Max RPM	1300	-
Water Levels	Load Sensing	-
No. of Soil Levels	5	-
Temperature Settings	-	High, Medium/High, Medium, Low/ Medium, Low
Drying Levels	-	Very, More, Normal, Less, Damp
Manual Dry Times	-	60 min., 50 min., 40 min., 30 min., 20 min.

FABRIC CARE FEATURES	Washer	Dryer
AI DD™	Yes	-
TurboWash® 360 Technology	Yes	-
Steam Technology	Yes	-
Allergiene™ Cycle	Yes	-
Sanitary Cycle	Yes	-
AI Sensor Dry™	-	Yes
Sensor Dry	-	Yes
Precise Temperature Control with Variable Heater	-	Yes
Steam Technology	-	Yes (TurboSteam™)

CONVENIENCE FEATURES	Washer	Dryer
Vibration Sensing (Cabinet Vibration Sensor)	Yes	-
True Balance® Anti-Vibration System	Yes	-
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener	-
End of Cycle Signal	Yes	-
LoadSense	Yes	-
Control Lock	Yes	
Auto Suds Removal	Yes	-
Leveling Legs	4 Adjustable Legs	
Drum Light	Yes	
Remaining Time Display/Status Indicator(s)	Yes	
3 Minute Installation Check	-	Yes
End of Cycle Signal	-	Yes
FlowSense® Duct Clogging Indicator	-	Yes
Wrinkle Care Option	-	Yes
Venting Option	-	Electric: 3 Way Venting / Gas: 2 Way Venting

ThinQ® TECHNOLOGY	Washer	Dryer
SmartDiagnosis™ (v3.0)	Yes	
Wi-Fi	Yes	
Remote Start and Cycle Monitor	Yes	
Energy Monitoring	Yes	
Tub Clean Coach	Yes	-

MOTOR AND AGITATOR	Washer	Dryer
Motor Type	Inverter Direct Drive Motor	-
Axis	Horizontal	-

MATERIALS AND FINISHES	Washer	Dryer
NeveRust® Stainless Steel Drum	Yes	
Cabinet	Painted Steel	
Control Panel	Plastic	
Top Plate	Steel	
Door / Rim	Large Circle Chrome / Matte Black (Nature Green only)	
Door Cover	Tinted Round Tempered Glass	
All Available Colors	White (W), Black Steel (B), Nature Green (G), Candy Apple Red (R)	

CERTIFICATION	Washer	Dryer
AAFA	Yes	-

POWER SOURCE	Washer	Dryer
Ratings	CSA Listed	
Electrical Requirements	120V, 10 Amps	240V, 30 Amps (Electric) / 120V, 15 Amps (Gas)
Type	Electric	Electric / Gas
BTU Rating	-	Elec : N/A / Gas : 20,000
LP Conversion Kit	-	383EEL3002D
Side Venting Kit	-	3911EZ9131X

DIMENSIONS	Washer	Dryer
Product (WxHxD)	27" x 74 3/8" x 30 3/8"	
Depth with Door Open	55" D with door open	
Carton (WxHxD)	30 1/16" x 79 11/32" x 32"	
Weight (Product/Carton)	311 lbs. / 346 lbs.	

LIMITED WARRANTY	Washer	Dryer
Parts and Labor	1 Year	
Direct Drive Motor	10 Years	-
Drum	3 Years	

UPC CODES	
WKEX200HWA (White)	048231028462
WKGX201HWA (White)	048231029261
WKEX200HBA (Black Steel)	048231028486
WKGX201HBA (Black Steel)	048231029254
WKEX200HGA (Nature Green)	195174042687
WKGX201HGA (Nature Green)	195174042694
WKEX200HRA (Candy Apple Red)	195174043080
WKGX201HRA (Candy Apple Red)	195174043110

© 2022 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 9/15/22

⚠ WARNING

- Read all installation instructions completely before installing and operating the appliance. It is important that you review this entire manual before installing and using the appliance. Detailed instructions concerning electrical connections and additional requirements are provided on the following pages.
- Moving or installation of the appliance requires two or more people. Failure to follow these instructions may result in injury.
- Store and install the appliance where it will not be exposed to temperatures below freezing or exposed to outdoor weather conditions. Failure to follow this warning can cause product or part failure, serious injury, fire, electric shock, or death.
- Properly ground the appliance to conform with all governing codes and ordinances. Failure to follow this warning can cause serious injury, fire, electric shock, or death.
- To ensure proper airflow, do not block the large opening on the bottom of the appliance with carpeting or other materials.
- Do not remove the ground prong from the power cord. Do not use an adapter or extension cord. Plug into a grounded 3-prong outlet. Failure to follow this warning can cause serious injury, fire, electric shock, or death.
- Certain internal parts are intentionally not grounded and may present a risk of electric shock only during servicing. Service personnel- Do not contact the following parts while the appliance is energized: pump, valve, motor, control board.

Choosing the Proper Location

Check the following requirements for the install location before installing the appliance.


- Allow for sufficient space between the walls and the appliance for installation.
- Make sure that the floor is clean, dry and free of dust, dirt, water and oil so the leveling feet cannot slide easily. Leveling feet that can move or slide on the floor can contribute to excess vibration and noise.
- If the floor has too much flex, reinforce it to make it more rigid. If the floor is not solid, it may cause severe vibration and noise.
- If a drain pan must be used, take extra care to follow the instructions provided with the drain pan and make sure the leveling feet are adjusted for firm and even contact with the pan. Use of drain pans and failure to properly level the appliance may result in increased vibration and noise during operation.

Flooring

- To minimize noise and vibration, install the washer on a level, solidly constructed floor capable of supporting the appliance without flexing or bouncing.
- The appliance must be installed on firm flooring to minimize vibration during the spin cycle. Concrete flooring is best, but a wood floor is sufficient, provided it is built to FHA standards.
- The floor under the appliance must not slope more than **1 inch (2.5 cm)** from front to back or side to side.
- Installing on carpeting and soft tile surfaces is not recommended.
- Never install the appliance on a platform or weakly supported structure.

Floor Installation

To ensure sufficient clearance for water inlet hoses, drain hose and airflow, allow minimum clearances of at least **1'' (2.5 cm)** at the sides and **4'' (10 cm)** behind the appliance. Be sure to allow for wall, door, or floor moldings that may increase the required clearances.

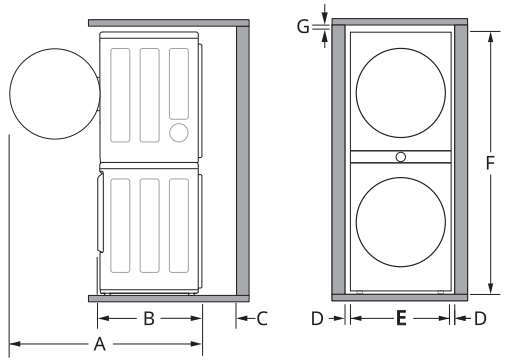

Dimensions and Clearances	
A	55'' (139.6 cm)
B	30 3/8'' (77 cm)
C	4'' (10 cm)
D	1'' (2.5 cm)
E	27'' (70 cm)
F	74 3/8'' (189 cm)
G	4'' (10 cm)

Exhaust

- A location that allows for proper exhaust installation. A gas dryer must be exhausted to the outdoors.

Power Outlet

- The power outlet must be within **60 inches (1.5 m)** of either side of the appliance.
- Position the appliance so that the outlet and plug are easily accessible.
- Do not overload the outlet with more than one appliance.
- The outlet must be grounded in accordance with current electrical wiring codes and regulations.
- Use a time-delay fuse or circuit breaker.
- It is the personal responsibility and obligation of the appliance owner to have a proper outlet installed by a qualified electrician.

NOTE


- Check code requirements that limit, or do not permit, installation of the appliance in garages, mobile homes or sleeping quarters. Contact your local building inspector.

Clearances

The following clearances are recommended for the appliance.

- Additional clearances should be considered for ease of installation and servicing.
- Additional clearances should be considered on all sides of the appliance to reduce noise transfer.

Installation spacing for Recessed Area or Closet Installation

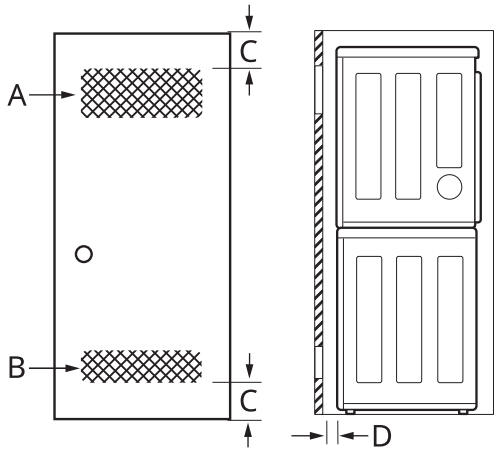

Description	Dimension/Clearance
A: Upper Ventilation Opening	48 sq. in. (310 cm^2)
B: Lower Ventilation Opening	24 sq. in. (155 cm^2)
C: Distance to Ventilation Opening	3″ (76 mm)
D: Front Clearance	4″ (100 mm)


Closet Ventilation Requirements

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm^2) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm^2) must be installed no more than one foot above the floor. Install vent grills in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

NOTE

- There should be at least a little space around the appliance (or any other appliance) to eliminate the transfer of vibration from one appliance to another. If there is enough vibration, it could cause appliances to make noise or come into contact, causing paint damage and further increasing noise.
- No other fuel-burning appliance can be installed in the same closet as an appliance.

the male end of the duct protrudes **1 1/2" (3.8 cm)** to connect the remaining ductwork. Attach the cover plate ❻ to the back of the dryer with the included screw.






Venting the Dryer

⚠ WARNING

- Gas dryers MUST exhaust to the outdoors.
- DO NOT use sheet metal screws or other fasteners which extend into the duct that could catch lint and reduce the efficiency of the exhaust system. Secure all joints with duct tape.
- To reduce the risk of fire, combustion, or accumulation of combustible gases, DO NOT exhaust dryer air into an enclosed and unventilated area, such as an attic, wall, ceiling, crawl space, chimney, gas vent, or concealed space of a building.
- To reduce the risk of fire, DO NOT exhaust the dryer with plastic or thin foil ducting.
- Do not exceed the recommended duct length limitations noted in the chart. Failure to follow these instructions may result in extended drying times, fire or death.
- Do not crush or collapse ductwork.
- Do not allow ductwork to rest on or contact sharp objects.
- If connecting to existing ductwork, make sure it is suitable and clean before installing the dryer.
- Venting must conform to local building codes.
- Use only 4 '' (10 cm) rigid, semi-rigid or flexible metal ductwork inside the dryer cabinet and for venting outside.
- The exhaust duct must be 4 '' (10 cm) in diameter with no obstructions. The exhaust duct should be kept as short as possible. Make sure to clean any old ducts before installing your new dryer.
- Rigid, semi-rigid or flexible metal ducting is recommended for use between the dryer and the wall. All non-rigid metal transition duct must be UL-listed. Use of other materials for transition duct could affect drying time.
- Ductwork is not provided with the dryer. You should obtain the necessary ductwork locally. The vent hood should have hinged dampers to prevent backdraft when the dryer is not in use.
- The total length of flexible metal duct must not exceed 8 ft. (2.4 m).

Ductwork

Wall Cap Type	Number of 90° Elbows	Maximum length of 4-inch diameter rigid metal duct
Recommended   a: 4 ” (10 cm)	0	65 ft. (19.8 m)
	1	55 ft. (16.8 m)
	2	47 ft. (14.3 m)
	3	36 ft. (11.0 m)
	4	28 ft. (8.5 m)
Use for only short run installations  b: 2 1/2 ” (6.4 cm)	0	55 ft. (16.8 m)
	1	47 ft. (14.3 m)
	2	41 ft. (12.5 m)
	3	30 ft. (9.1 m)
	4	22 ft. (6.7 m)

NOTE

- Deduct 6 ft. (1.8 m) for each additional elbow. Do not use more than four 90° elbows.



NOTE

- In Canada, only those foil-type flexible ducts, if any, specifically identified for use with the appliance by the manufacturer should be used. In the United States, only those foil-type flexible ducts, if any, specifically identified for use with the appliance by the manufacturer and that comply with the Outline for Clothes Dryer Transition Duct, Subject 2158A, should be used.

Routing and Connecting Ductwork

Follow the guidelines below to maximize drying performance and reduce lint buildup and condensation in the ductwork. Ductwork and fittings are NOT included and must be purchased separately.

- Use 4'' (10 cm) diameter rigid, semi-rigid or flexible metal ductwork.
- The exhaust duct run should be as short as possible.
- Use as few elbow joints as possible.
- The male end of each section of exhaust duct must point away from the dryer.
- Use duct tape on all duct joints.
- Insulate ductwork that runs through unheated areas in order to reduce condensation and lint buildup on duct surfaces.
- Incorrect or inadequate exhaust systems are not covered by the dryer warranty. Dryer failures or service required because of such exhaust systems will not be covered by the dryer warranty.

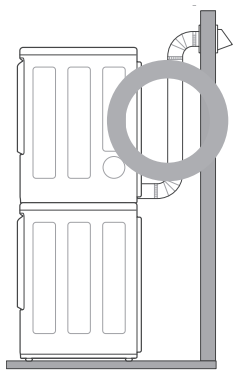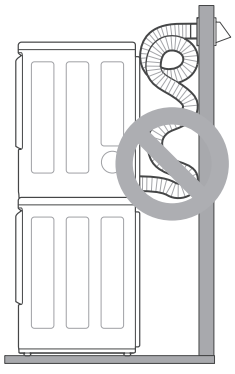Correct Venting	Incorrect Venting
	

Connecting Gas Dryers

⚠ WARNING

- To reduce the risk of fire or explosion, electric shock, property damage, injury to persons, or death when using this appliance, follow requirements including the following:

Electrical Requirments for Gas Models

⚠ WARNING

- This dryer is equipped with a three-prong grounding plug for protection against shock hazard and should be plugged directly into a properly grounded three-prong receptacle. Do not cut or remove the grounding prong from this plug.
- Do not, under any circumstances, cut or remove the third (ground) prong from the power cord.
- For personal safety, this dryer must be properly grounded.
- This dryer must be plugged into a 120-VAC, 60-Hz. grounded outlet protected by a 15-ampere fuse or circuit breaker.
- Where a standard 2-prong wall outlet is encountered, it is your personal responsibility and obligation to have it replaced with a properly grounded 3-prong wall outlet.


Gas Supply Requirements

⚠ WARNING


- DO NOT attempt any disassembly of the dryer; disassembly requires the attention and tools of an authorized and qualified service technician or company.
- DO NOT use an open flame to inspect for gas leaks. Use a noncorrosive leak detection fluid.

- Gas pressure must not exceed 8-inch (20.4 cm) water column for NG, or 13-inch (33.1 cm) water column for LP.
- Isolate the dryer from the gas supply system by closing its individual manual shutoff valve during any pressure testing of the gas supply at pressures greater than 1/2 psi (3.5 kPa).

3 Use the provided tie strap ❷ to secure the drain hose in place.




4 If the water valves and drain are built into the wall, fasten the drain hose to one of the water hoses with the provided tie strap ❸ (ribbed side on inside).

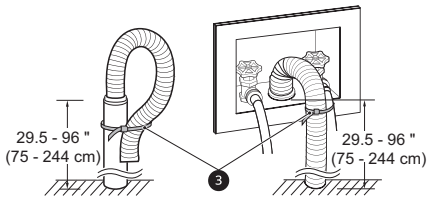


Using the Laundry Tub to Drain

1 Clip the end of the hose into the elbow bracket.


- Connect the elbow bracket ❶ within **4 inches (10 cm)** of the end of the drain hose. If the drain hose is extended more than **4 inches (10 cm)** beyond the end of the elbow bracket, mold or microorganisms could spread to the inside of the washer.



2 Hang the end of the drain hose over the side of the laundry tub.



3 Use the provided tie strap to secure the drain hose in place.



Leveling the Appliance

The drum of the washer spins at very high speeds. To minimize vibration, noise, and unwanted movement, the floor must be a solid, level surface.

⚠ CAUTION

- Using the appliance without leveling it may cause excess vibration and noise, leading to an appliance malfunction.
- Adjust the leveling feet only as far as necessary to level the appliance. Extending the leveling feet more than necessary can cause the appliance to vibrate.

NOTE

- Before installing the appliance, make sure that the floor is clean, dry and free of dust, dirt, water and oil so the appliance feet cannot slide easily. Feet that move or slide on the floor can contribute to excessive vibration and noise.

How to Level the Appliance

1 Position the appliance in its final location.

- Take special care not to pinch, strain, or crush the water and drain hoses. If you have a carpenter's level ❶, you can use it to check that the appliance is level. The slope

GE APPLIANCES
a Haier company



GFW655SPVDS

GE ENERGY STAR 5.0 cu. ft. Capacity Smart Front Load Steam Washer with SmartDispense UltraFresh Vent System with OdorBlock and Sanitize + Allergen

Fill Hose	WH41X10207 (sold separately)
Optional Pedestal Accessory	GFP1528PTDS (Sold Separately)
Optional Riser	GFR0728PTDS (Sold Separately)
Optional Stacking Kit	GFA28KITN
Color Appearance	Carbon Graphite
Door Style	See-Thru Glass with Tinted Door Protect | Dark Chrome Outer Ring with Chrome Vent | Reversible Door
Handle	Pocket Handle
Handle Color	Carbon Graphite
Installation	Undercounter, Stacked, Side-by-Side, Built-In, Pedestal | True32 Closet Depth
Trim/Accents	Dark Chrome/White Knob
Total Capacity (cubic feet)	5.0 cu ft
Wash Basket Type	Stainless Steel - Tilted
Quiet Package	Quiet-By-Design with dBT Quiet Control
Adaptive Capabilities	Automatic Temperature Control | Auto-Load Sensing | Adaptive Spin | dBT Quiet Control

Specifications are subject to change without warning. Specifications are intended for initial planning purposes and any final planning, cabinet & countertop cutouts, etc. should be calculated using the manufacturer's installation guide or actual appliance.

GE APPLIANCES
a Haier company

Additional Washer Features	Front Serviceable | Adjustable Leveling Legs | Internal heater | Reversible Door | LED Basket Light | Power Cord Attached
Connected Capabilities	Amazon Alexa | IFTTT | The Google Assistant | Sonos
Control Type	Rotary-Electronic w/LEDs | Power On/Off | Start/Pause | Capacitive Touch
Dispenser	Detergent (Liquid/Powder) Timed Flow Through | Bleach Timed Flow Through | Fabric Softener Timed Flow Through | PreWash | Smart Dispense - Bulk Detergent | Protected with Microban
Front Serviceable	Yes
Leveling System	Adjustable Leveling Legs
Maximum Spin Speed	1300 RPM
Number of Cycles	12
OdorBlock Capabilities	UltraFresh Vent System with OdorBlock
Optional Soil Levels	Extra Heavy | Heavy | Normal | Light | Extra Light
Pedestal	Optional
Product Type	Front Load | Stackable
Receptacle Type	3-Prong Grounding
SmartDispense Technology	Yes
Specialty Cycles	Self Clean | Bulky/Bedding | Power Clean | Active Wear | Sanitize + Allergen | Pre-Wash | Cold Wash | Drain amp Spin
Spin Speeds	5
Steam	Yes
Style	Front-Loading
Vibration Control	dBT Quiet Control patented technology
Wash/Rinse Temperatures	5
Washer Control Features	Control Lock | Dryer Control | Adjustable End-of-Cycle Signal | LED Display | Digital Cycle Countdown | LED Indicators | Add Garment/Pause | Remote Start | Delay Wash - Up to 24 hours | More Water
Washer Cycles	Normal | Self Clean | Power Clean | Active Wear | Power Clean (Steam) | Sanatize +Allergen (Steam) | Whites (Steam) | Whites | Towels | Bulky/Bedding | Sanitize + Allergen | Quick Wash | Delicates | Cold Wash | Rinse + Spin

Specifications are subject to change without warning. Specifications are intended for initial planning purposes and any final planning, cabinet & countertop cutouts, etc. should be calculated using the manufacturer's installation guide or actual appliance.

Washer Options/Settings	Delay Wash | More Water | Dryer Control | Extra Rinse | Tumble Care | UltraFresh Vent | Delay Start | Time Saver | PreWash | Smart Dispense | Power Steam
Water Levels	Load-Sensing Adaptive Fill | Automatic Temperature Control
Water Temp System	PerfecTemp Deluxe
Whites Cycle	Yes
WiFi Connect	Built-In | WiFi Bluetooth
Circuit Breaker or Time Delay Fuse	15 or 20 Amp
Volts/Hertz	120V 60Hz
Labor Warranty	Limited 1-year entire appliance
Parts Warranty	Limited 1-year entire appliance | Limited 10-year motor
Warranty Notes	See written warranty for full details
Approximate Shipping Weight	255.7 lb
Depth with Door Open 90	54 1/2 in
Net Weight	246 lb
Overall Depth	32 in
Overall Height	39 3/4 in
Overall Width	28 in

Specifications are subject to change without warning. Specifications are intended for initial planning purposes and any final planning, cabinet & countertop cutouts, etc. should be calculated using the manufacturer's installation guide or actual appliance.

GFW655SSVWW / GFW655SPVDS


GE® 5.0 cu. ft. Capacity Front Load ENERGY STAR® Steam Washer with SmartDispense™ and UltraFresh Vent System with OdorBlock™

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)


ELECTRIC RATING	
120V	11.0A, 60Hz

INSTALLATION INFORMATION:
For complete information, see installation instructions packed with your washer.

INCLUDED:
- Power cord – up to 66" length
- Drain hose – up to 60" length

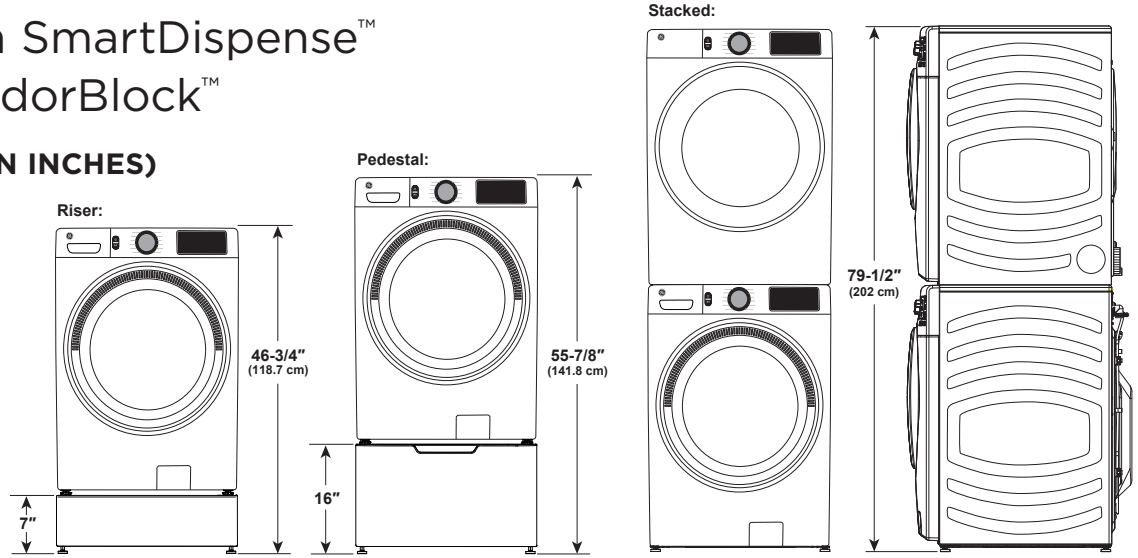

ADA Compliant

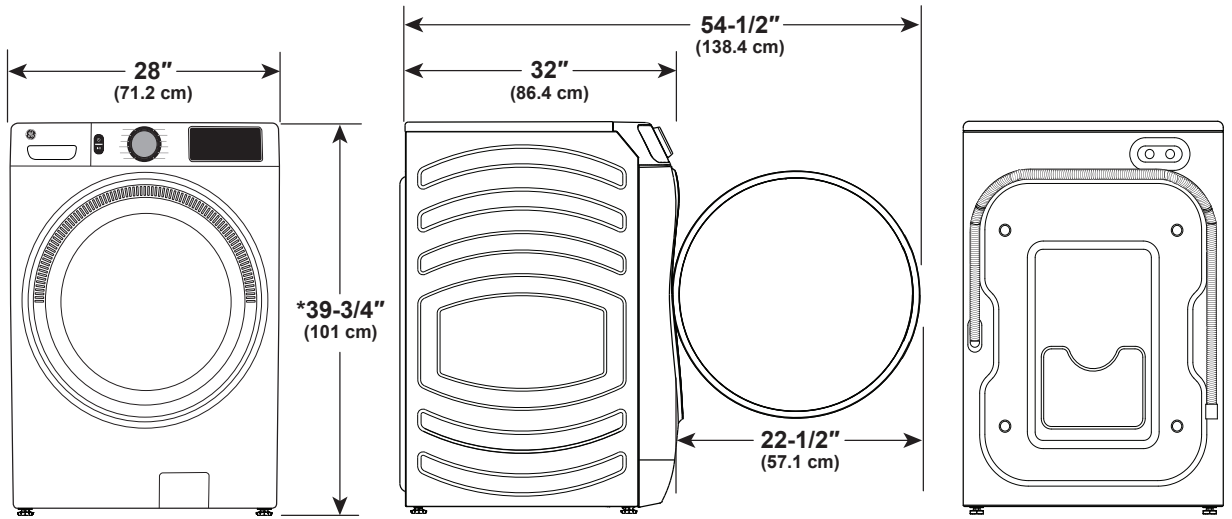

Front View | Side View | Back View

*With leveling legs retracted: 39-3/4" (101 cm).
With leveling legs fully extended: 40-5/8" (103.1 cm).

GE APPLIANCES

For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.

ADA COMPLIANT

Listed by Underwriters Laboratories

Specification Revised 6/23

GFW655SSVWW / GFW655SPVDS

GE® 5.0 cu. ft. Capacity Front Load ENERGY STAR® Steam Washer with SmartDispense™ and UltraFresh Vent System with OdorBlock™

SPECIAL INSTALLATION REQUIREMENTS:

STACKED INSTALLATION:

-Brackets for stacking dryer over washer are not included with the washer. Order part no. GFA28KITN.

ALCOVE OR CLOSET INSTALLATION:

-If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.

-The dryer MUST be exhausted to the outside.

-Minimum clearances between dryer cabinet and adjacent walls or other surfaces are: 0" all sides and top.*

-Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.

-No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

BATHROOM OR BEDROOM INSTALLATION:

-The dryer MUST be exhausted to the outdoors.

-The installation must conform with the local codes, or in the absence of local codes, with the National Electric Code and National Fuel Gas Code, ANSI Z223.

MINIMUM CLEARANCE OTHER THAN ALCOVE OR CLOSET INSTALLATIONS:

-Minimum clearances to combustible surfaces 0" all sides and top.*

FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES, PLEASE CALL 1-800-GE-CARES.

*For improved performance, a 1/2" clearance is suggested on each side.
**Accessories sold separately.

WEIGHT

-Carton weight 255.7 lbs.
-Product weight 246 lbs.

ACCESSORIES**

GE Part Number	Description
WR97X27706	Touch-up Paint (Carbon Graphite) .06 oz.
WB64X5025	Touch-up Paint (White) .06 oz.
WH49X316	Drain Hose Extension
PM7X2	Universal Low-Profile Floors Tray (White)
WX17X10001CA	Vibration Pads
WH41X10207	Fill Hose
GFP1528SNWW	Pedestal Accessory (White)
GFP1528PTDS	Pedestal Accessory (Carbon Graphite)
GFR0728SNWW	Riser (White)
GFR0728PTDS	Riser (Carbon Graphite)
GFA28KITN	Stacking Kit

WARRANTY

Labor Warranty	Limited 1-year entire appliance
Parts Warranty	Limited 1-year entire appliance Limited 10-year motor

GE APPLIANCES

For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.

ADA COMPLIANT

Listed by Underwriters Laboratories

GE APPLIANCES
a Haier company



GFD65ESPVDS

GE 7.8 cu. ft. Capacity Smart Front Load Electric Dryer with Steam and Sanitize Cycle

Inlet Hose	WH41X10207 (Sold Separately)
Optional Dryer Rack Accessory	WE02X29449
Optional Pedestal Accessory	GFP1528PTDS (Sold Separately)
Optional Riser	GFR0728PTDS (Sold Separately)
Optional Side Vent Kit	GFA28DSVN
Optional Stacking Kit	GFA28KITN
Color Appearance	Carbon Graphite
Door Style	See-Thru Glass | Reversible Door
Handle	Pocket Handle
Installation	Undercounter, Stacked, Side-by-Side, Built-In, Pedestal | True32 Closet Depth | Power Cord Not Included
Trim/Accents	Dark Chrome/Dark Knob
Total Capacity (cubic feet)	7.8 cu ft
Quiet Package	Quiet-By-Design
Additional Cycles	Reduce Static | Sanitize | Steam Refresh | Steam Dewrinkle | Delay Dry - up to 24 hours | Remote Start | Air Fluff | EcoDry

Specifications are subject to change without warning. Specifications are intended for initial planning purposes and any final planning, cabinet & countertop cutouts, etc. should be calculated using the manufacturer's installation guide or actual appliance.

GE APPLIANCES
a Haier company

Additional Dryer Features	LED Interior Light | Vent Sensing | Front Serviceable | Removable Up-Front Lint Filter | Damp Alert | Y-connector, short and long steam hoses included | ecoDry
Additional Optional Cycles	Damp Alert | Wrinkle Care
Connected Capabilities	Amazon Alexa | IFTTT | The Google Assistant | Sonos
Control Type	Rotary-Electronic w/LEDs | Power On/Off | Start/Pause | Capacitive Touch
Drum Type	Alcosta Aluminized Drum
Dryer Control Features	Control Lock | Adjustable End-of-Cycle Signal | LED Display | Digital Cycle Countdown | LED Indicators | Remote Start | Delay Dry - Up to 24 hours
Dryer Cycles	Mixed Loads | Steam Refresh | Steam Dewrinkle | Timed Dry | Cottons | Towels | Bulky / Bedding | Sanitize | Active Wear | Quick Dry | Delicates | Perm Press
Dryness Levels	Extra Dry | More Dry | Dry | Less Dry | Damp
Dual Thermistors	Yes
Energy Saving Option	Yes - Eco Dry
Exhaust Options	4-Way (Rear Right Left amp Bottom)
Flexible Installation	Undercounter, Stacked, Side-by-Side, Built-In
Front Serviceable	Yes
Fuel Type	Electric
Heat Selections	5
Leveling System	Adjustable Leveling Legs
Long Vent Capability	Up to 90 feet
Moisture Sensor	Sensor Dry
Number of Cycles	12
Pedestal	Optional
Product Type	Front Load Matching | Stackable
Removable Up-Front Lint Filter	Yes with reminder light
Reverse-a-Door	Yes
Steam	Yes
Steam Dewrinkle	Yes
SteamRefresh	Yes
Style	Front-Loading

Specifications are subject to change without warning. Specifications are intended for initial planning purposes and any final planning, cabinet & countertop cutouts, etc. should be calculated using the manufacturer's installation guide or actual appliance.

Temperature Options	High/Medium/Low/Extra Low/No Heat
Timed Dry	120 Minutes | Presets (10,20,40,60,90) | More Time + | Less Time -
WiFi Connect	Built-In
Wrinkle Care Cycle	Yes
Volts/Hertz/Amps	120 V 60 Hz 6A
Volts/Watts/Amps	120V/240V,5600W,24A,60Hz or 120V/208V,4400W,22A,60Hz
Labor Warranty	Limited 1-year entire appliance
Parts Warranty	Limited 1-year entire appliance
Warranty Notes	See written warranty for full details
Approximate Shipping Weight	144 lb
Depth with Door Open 90	54 1/2 in
Net Weight	134 lb
Overall Depth	32 in
Overall Height	39 3/4 in
Overall Width	28 in

Specifications are subject to change without warning. Specifications are intended for initial planning purposes and any final planning, cabinet & countertop cutouts, etc. should be calculated using the manufacturer's installation guide or actual appliance.

GFD65ESSVWW / GFD65ESPVDS

GE® 7.8 cu. ft. Capacity Front Load Electric Dryer with Steam

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)


ELECTRIC DRYER RATING	
120V/240V	5600W, 25A, 60Hz
120V/208V	4300W, 23A, 60Hz

EXHAUST OPTIONS: 4-way via rear, left, right, and bottom. (The right, left, and bottom venting options require Side Vent Kit: GFA28DSVN)


CIRCUIT REQUIREMENTS: An individual, properly grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse, is required.

NOTE: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

INSTALLATION INFORMATION: For complete information, see installation instructions packed with your dryer.

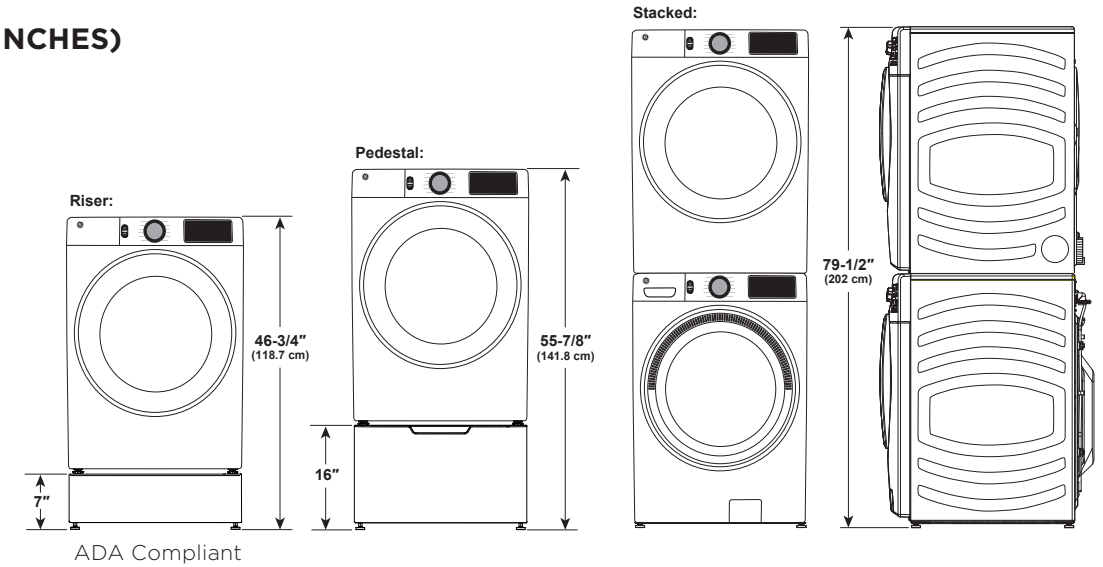

ADA Compliant

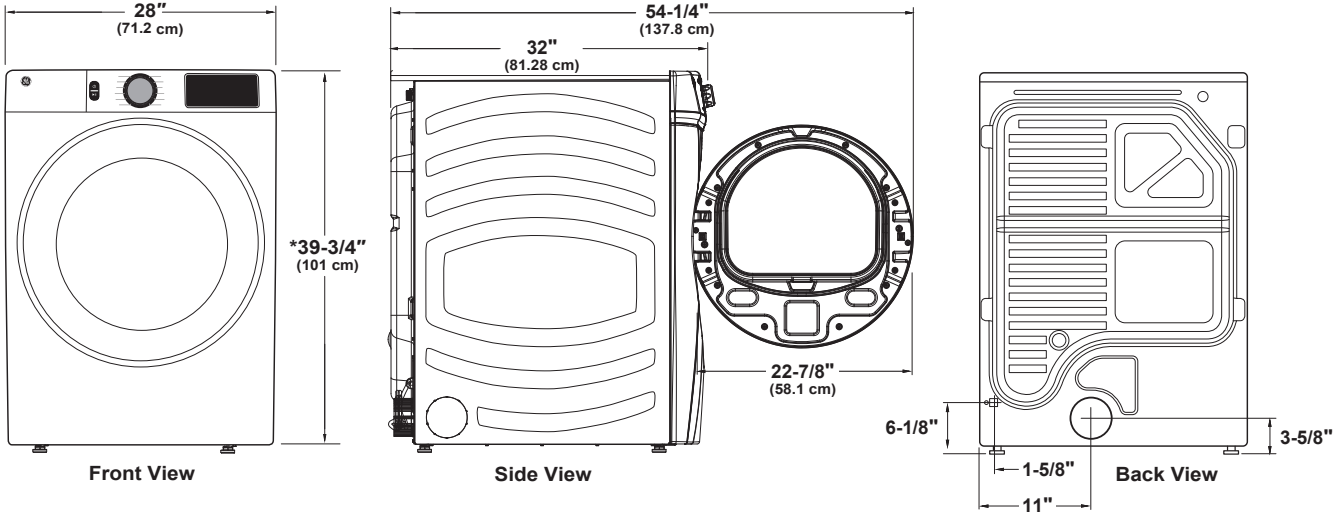

*With leveling legs retracted: 39-3/4" (101 cm). With leveling legs fully extended: 40-5/8" (103.1 cm).

GE APPLIANCES

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.

ADA COMPLIANT

Listed by Underwriters Laboratories

Specification Revised 6/23

GFD65ESSVWW / GFD65ESPVDS

GE® 7.8 cu. ft. Capacity Front Load Electric Dryer with Steam

SPECIAL INSTALLATION REQUIREMENTS:

STACKED INSTALLATION:
Brackets for stacking dryer over washer are not included with the dryer. Order part no. GFA28KITN.

ALCOVE OR CLOSET INSTALLATION:
If your dryer is approved for installation in an alcove or closet, it will be label on the dryer back.

The dryer MUST be exhausted to the outside.

Minimum clearances between dryer cabinet and adjacent walls or other surfaces are: 0" all sides and top.*

Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.

No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

BATHROOM OR BEDROOM INSTALLATION:
The dryer MUST be exhausted to the outdoors.

The installation must conform with the local codes, or in the absence of local codes, with the National Electric Code and National Fuel Gas Code, ANSI Z223 for gas dryers.

MINIMUM CLEARANCE OTHER THAN ALCOVE OR CLOSET INSTALLATIONS:
Minimum clearances to combustible surfaces 0" all sides and top.*

FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES, PLEASE CALL 1-800-GE-CARES.

*For improved performance, a 1/2" clearance is suggested on each side.
**Accessories sold separately.

WEIGHT
-Carton weight 142 lbs.
-Product weight 132 lbs.

DRYER ACCESSORIES**

GE Part Number	Description
WB64X5025	Touch-up Paint (White) .06 oz.
WR97X27706	Touch-Up Paint (Carbon Graphite) – 0.6 oz
WE02X29449	Dryer Rack Assembly
GFA28DSVN	Side Vent Kit
WH41X10207	Inlet Hose
WX17X10001CA	Vibration Pads
GFP1528SNWW	Pedestal Assembly (White)
GFP1528PTDS	Pedestal Assembly (Carbon Graphite)
GFR0728SNWW	Riser (White)
GFR0728PTDS	Riser (Carbon Graphite)
GFA28KITN	Stacking Kit

WARRANTY

Labor Warranty	Limited 1-year entire appliance
Parts Warranty	Limited 1-year entire appliance Limited 10-year motor

GE APPLIANCES

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.

ADA COMPLIANT

Listed by Underwriters Laboratories

Specification Revised 6/23


GFD65ESSVWW / GFD65ESPVDS

GE® 7.8 cu. ft. Capacity Front Load Electric Dryer with Steam

DRYER EXHAUSTING INFORMATION –METAL DUCT ONLY

For complete information, see installation instructions packed with your dryer.

DUCTING MATERIALS: For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If rigid metal duct cannot be used, then UL-listed flexible metal (semi-rigid) ducting can be used (Kit WX08X10077). In special installations, it may be necessary to connect the dryer to the house vent using a flexible metal (foil-type) duct. A UL-listed flexible metal (foil-type) duct may be used ONLY in installations where rigid metal or flexible metal (semi-rigid) ducting cannot be used AND where a 4" diameter can be maintained throughout the entire length of the transition duct. Please see installation instruction packed with your dryer for complete instructions when using flexible metal (foil type) ducting.



Domestic dryer models	Number of 90° turns	Best performance: Maximum length of 4" dia. **rigid metal** duct — Exhaust hood type: **A** 4" opening	**B** 2-1/2" opening
	0	90 ft.	60 ft.
	1	60 ft.	45 ft.
	2	45 ft.	35 ft.
	3	35 ft.	25 ft.
	4	25 ft.	15 ft.

EXHAUST LENGTH CALCULATION:

1. Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
2. The maximum length of 4" rigid (aluminum or galvanized) duct which can be tolerated is shown in the table.

   A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow.


   A turn over 45° should be treated as a 90° elbow.

Dryers must be exhausted to the outside.

CAUTION: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down.

FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES,
PLEASE CALL 1-800-GE-CARES.

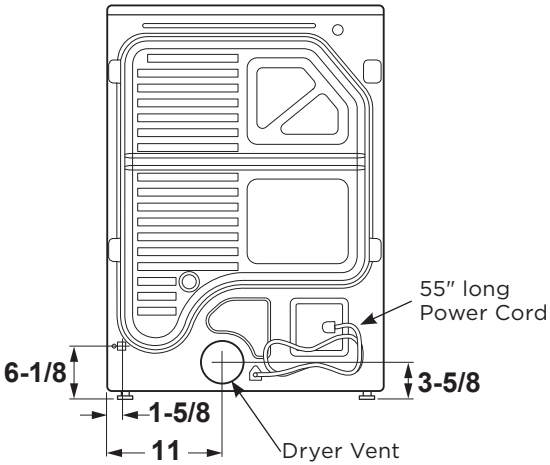

GE APPLIANCES

For answers to your Monogram, Café™,
GE Profile™ or GE Appliances product questions,
visit our website at geappliances.com or call
GE Answer Center® Service, 800.626.2000.

ADA COMPLIANT

Listed by Underwriters Laboratories

Specification Revised 6/23