
RECTORSEAL SHOEMAKER
CSW Industrials Companies

Linear Slot Diffuser Submittal

Tape & Mud Frame – Diffuser Only (Type 3)

MODEL: LSD-T3-DO

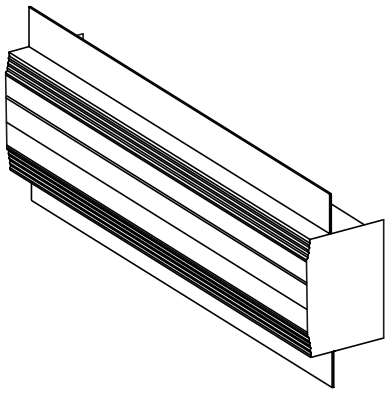

Standard Features:

- Extruded aluminum slot diffuser
- Tape & Mud flange for frameless and flush installation
- Designed for 1/2" or 5/8" drywall application
- Minimum length 6"
- Unlimited continuous sections available with butt joints
- Soft White

Manufacturing Requirements:

Length _____ ☐ feet ☐ inches

☐ Supply – Black adjustable pattern controller allows full 180° adjustment and control of airflow (LSD-T3-S)

☐ Return – less pattern controller (LSD-T3-R)

Number of slots: ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☐ 7 ☐ 8

Slot Width: ☐ 1/2" ☐ 3/4" ☐ 1"


Finishes: For LSD with 1 Slot, only Soft White is an available finish.


STANDARD COLORS


- ☐ Soft White
- ☐ Driftwood Tan

DESIGNER COLORS

- ☐ Black
- ☐ Bronze
- ☐ Storm Gray
- ☐ Cement Gray
- ☐ Aluminum Paint
- ☐ Coffee Tan
- ☐ Warm White
- ☐ Glossy White

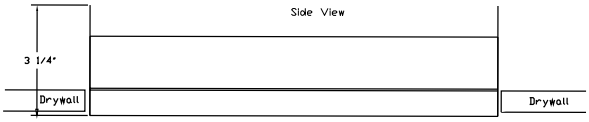

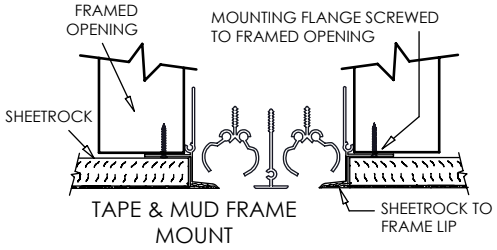

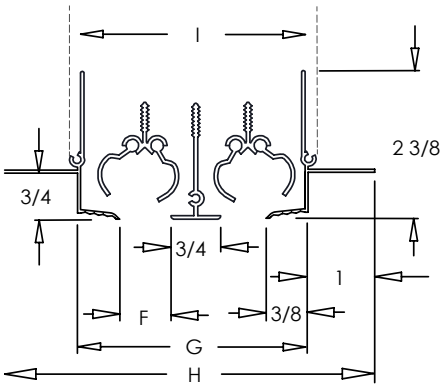

LSD-T3
TAPE & MUD FRAME

Dimensions (in inches)

# OF SLOTS	SLOT WIDTH (F)	OVERALL WIDTH (H)	WIDTH OF BACK (I)	OPENING WIDTH (G)	# OF SLOTS	SLOT WIDTH (F)	OVERALL WIDTH (H)	WIDTH OF BACK (I)	OPENING WIDTH (G)
1	1/2	3 1/4	1 1/2	1 1/4	5	1/2	8 1/4	6 1/2	6 1/4
	3/4	3 1/2	1 3/4	1 1/2		3/4	9 1/2	7 3/4	7 1/2
	1	3 3/4	2	1 3/4		1	10 3/4	9	8 3/4
2	1/2	4 1/2	2 3/4	2 1/2	6	1/2	9 1/2	7 3/4	7 1/2
	3/4	5	3 1/4	3		3/4	11	9 1/4	9
	1	5 1/2	3 3/4	3 1/2		1	12 1/2	10 3/4	10 1/2
3	1/2	5 3/4	4	3 3/4	7	1/2	10 3/4	9	8 3/4
	3/4	6 1/2	4 3/4	4 1/2		3/4	12 1/2	10 3/4	10 1/2
	1	7 1/4	5 1/2	5 1/4		1	14 1/4	12 1/2	12 1/4
4	1/2	7	5 1/4	5	8	1/2	12	10 1/4	10
	3/4	8	6 1/4	6		3/4	14	12 1/4	12
	1	9	7 1/4	7		1	16	14 1/4	14

Note ID lengths 3/16" undersized nominal

Installation Note: Plenum must be installed before diffuser install.

Additional Information:

Project / Location:	Submittal Notes
Engineer:	
Architect:	
Contractor:	