



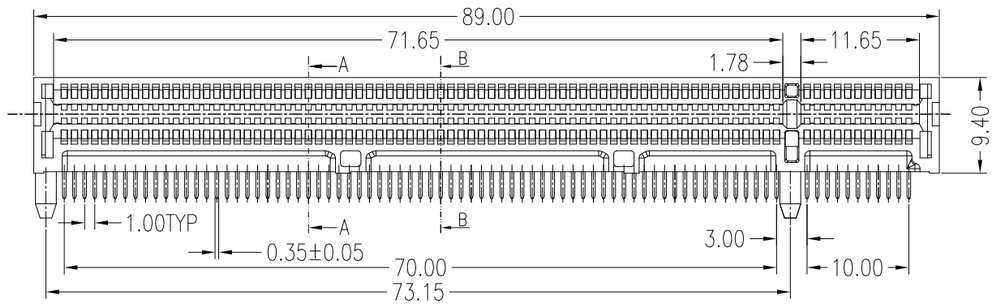


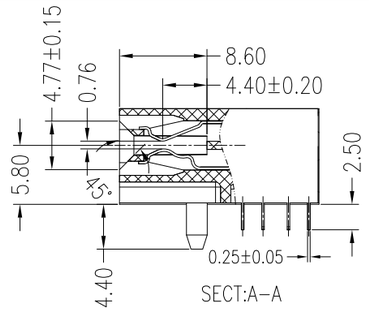




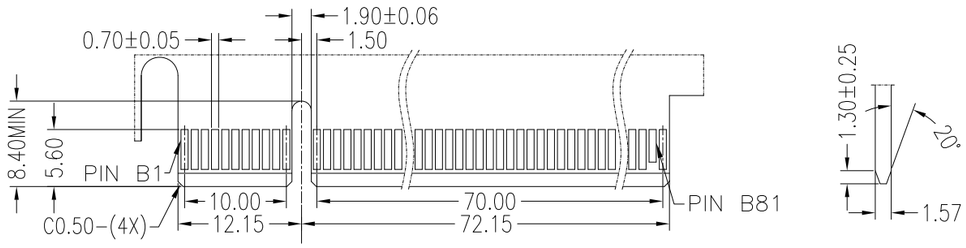


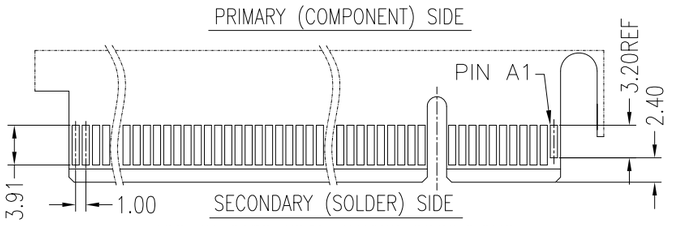

ADD-IN CARD EDGE-FINGER DIMENSIONS
DEFAULT TOLERANCE ±0.13

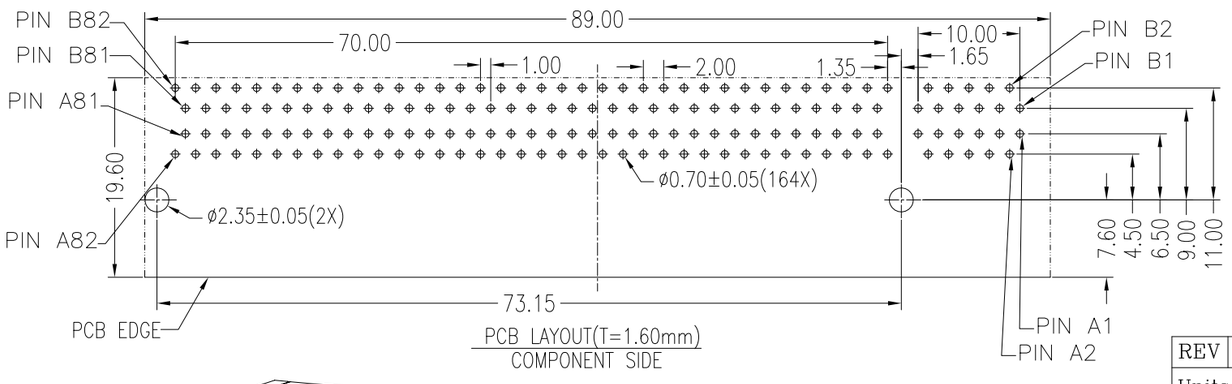

PCB LAYOUT(T=1.60mm)
COMPONENT SIDE

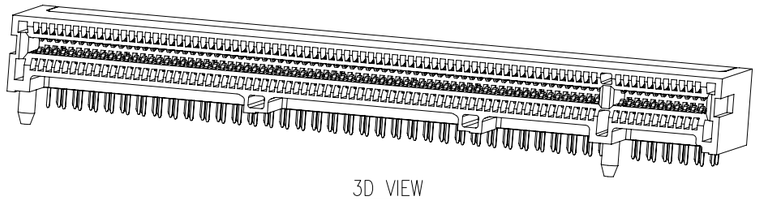

3D VIEW

REV.	ECN.NO.	DATE
A	RELEASED	01/08-'17
G	Modify molding structure	11/24-'21
H	Modify Contact Structure	05/06-'25

NOTES:

*Material

Housing: LCP, UL 94V-0.
Contact: Brass.
Plating: Au Plating On Contact Area;
Sn(100u" Min.) Plating On Solder Tail;
Ni(50u" Min.) Underplating Overall;

*Mechanical

Insertion Force: 1.15N Max per contact pair;
Withdrawal Force: 0.15N Min per contact pair;
Contact Retention Force: 3.5N Min per contact;
Durability: 50 cycles.

*Electrical Specification

Current Rating : 1.1 Ampere.
Contact Resistance : 30mΩ Max.
Insulation Resistance : 1000MΩ Min, At 500V AC.

*Environmental

Operating Temperature : -55°c to +105°c

*How to Order:

WPRS-164AL1B7U

- Series NO.
- Number of Contacts
- Au: A:1u" D:15u" F:30u"
- L: LCP
- 1: Black
- Blank: No Mark
  W: Winning Mark
- U: Lead Free
- 7: DIP 2.50(GEN3)(Right key)
- B: Brass

REV	Modify Contact Structure				
Units	mm	Scale	10:9	Drawing By	Date
Tolerance Unless Otherwise Specified				CLJ	05/06-'25
.X ~ ±0.35				Reviewed By	Date
.XX ~ ±0.25				Charles	05/07-'25
.XXX ~ ±0.15				Approval By	Date
Angle ~ ± 3°				Eric	05/07-'25

连兴旺电子(深圳)有限公司
LXWCONN ELECTRONICS(SHENZHEN)CO.,LTD

Date	05/06-'25
Sheet	1 of 1
Third Angle Projection	
Title	PCI EXPRESS R/A DIP TYPE (GEN3) 164PIN (Right key)
Drawing No.	WPRS-164AL1B7U
REV	H