CZL-601 Load Cell

Send Enquiry

Rated Load (Kg) : 3, 6, 10,20, 40,80. We are a prominent Exporter, Importer and Supplier of Load Cell Czl 601. Load Cell (CZL-601) is made of alloy aluminum. Load Cell (CZL-601) is hermetically sealed with glue to IP65, surface anodized and anti-corrosion, integral structure and easy installation. Load Cell (CZL-601) is best suited for electronic table top scale, floor scale and other weighing equipment.

Product Details

Type	Load Cell
Material	Aluminum
Application	Industrial Use
Output	2mv
Rated Load	40kg
Brand Name	CZl601


Standard Specification

Nominal Output	2.0 + 0.1 mv/v (mili Volt per volt)
Precision	C2/C3 (0.017% & 0.02% FSO comprehensive error)
Excitation Voltage	9 VDC – Maximum 12 VDC
Platter size	250mm x 350mm
Safe Load	120% of Rated Capacity
Ultimate Load	150% of Rated Capacity
Non Linearity	<+0.03% of FSO (Full Scale output)
Creep (30 minutes)	<+0.025% of FSO
Zero Balance	<+1% of FSO
Input Resistance	400 + 10 ohms
Output Resistance	350 + 5 ohms

Protected with free version of Watermarkly. Full version doesn't put this mark.

Insulation Resistance	Above 5000 Mega ohms
Temp. Compensation	- 10 ˚C to + 40 ˚C
Temp. Effect on zero & span	< 0.03% FSO/10 ˚C
Material	Alluminium alloy, colourless anodized
Cable	4mm, 0.42mts

Installation Size (mm)

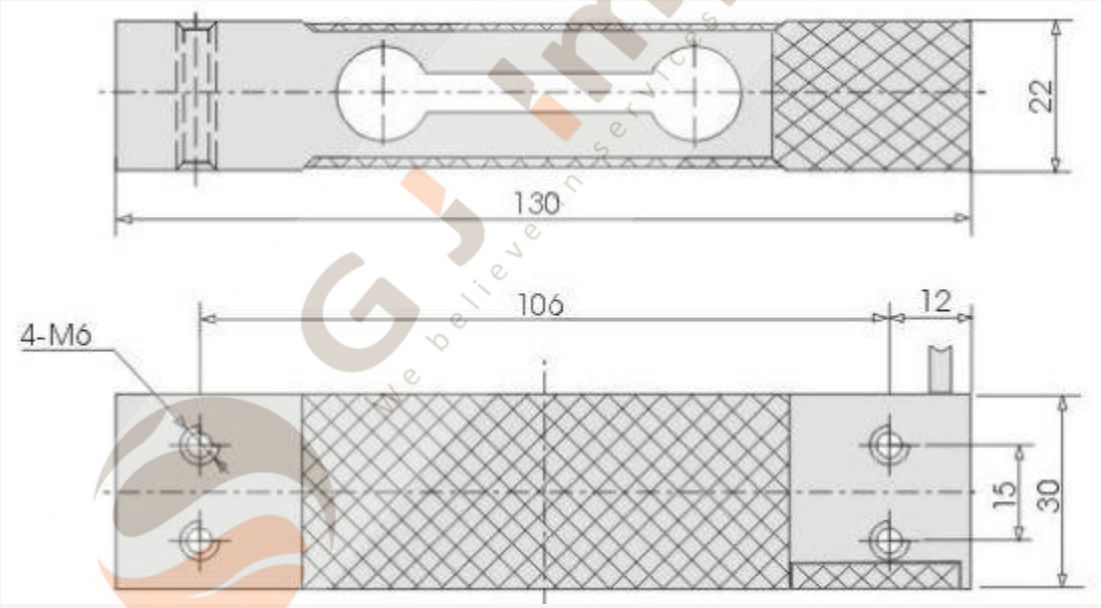

Wiring Schematic Diagram

- **Red :** Input (+)
- **White :** Output (−)
- **Black :** Input (−)
- **Green :** Output (+)
-

Notes： It used 4-core shielded cable(φ5×3000mm)

Protected with free version of Watermarkly. Full version doesn't put this mark.