
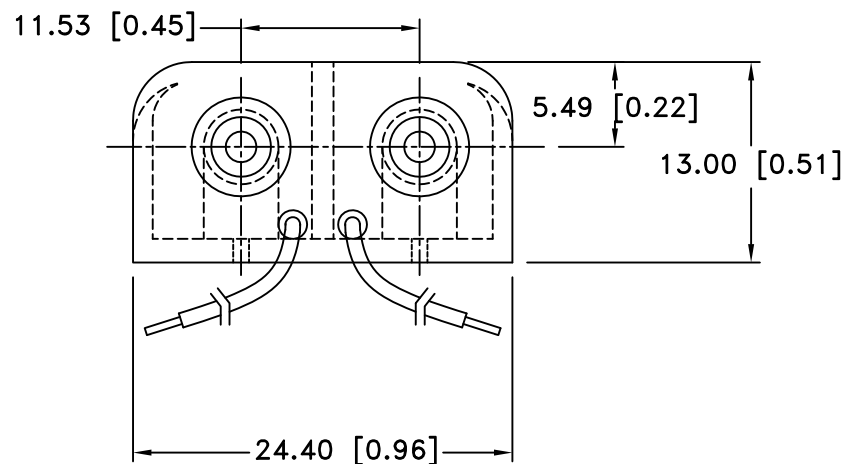


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
3/12/10	D	DIM. 51.56 WAS 51.31 DIM. 14.22 WAS 13.49 DIM. 18.29 WAS 18.71	T.B.	B.S.	
3/26/10	E	DIM. 51.40 WAS 51.56 DIM. $\phi 2.40$ WAS $\phi 2.49$ DIM. 24.40 WAS 24.51 DIM. 13.00 WAS 12.95	T.B.	B.S.	
11/07/14	F	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

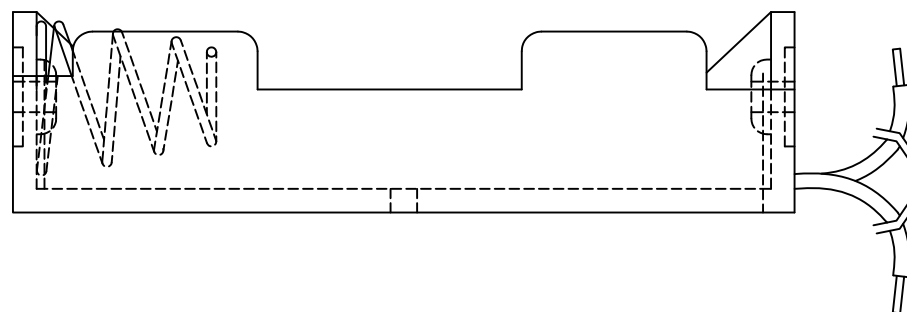


NOTES:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 RIVETS: BRASS, NICKEL PLATED.
 SPRING: SPRING STEEL, NICKEL PLATED.
 WIRE: 26 AWG, UL1007, CSA, TR64
 CONTACT RESISTANCE: UNDER 50m Ω FOR +/- CONTACTS PER EIA-540J000

ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)	Scale		Drawn By B.S.
Fractional $\pm .8$ (.030)	Title		Approved By T.B.
Angular $\pm 3^\circ$	Date 11/07/14	Drawing Number BC2AAAW	