


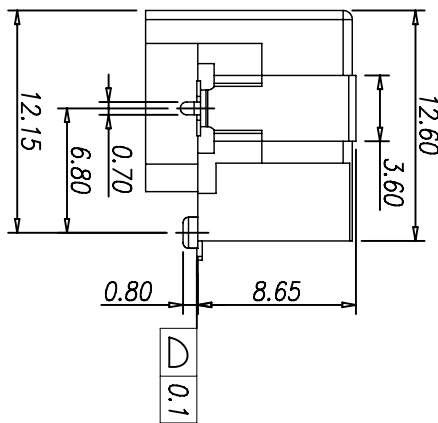
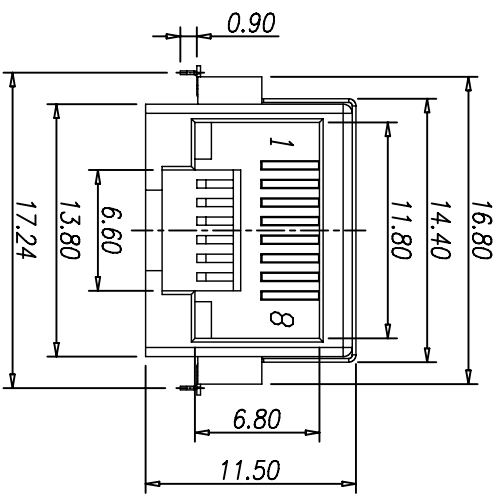


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Modular Jack, 8P8C, 1X1PORT	MJ88-BX11-HRV53

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	—	New Release	XSX	2014.06.18

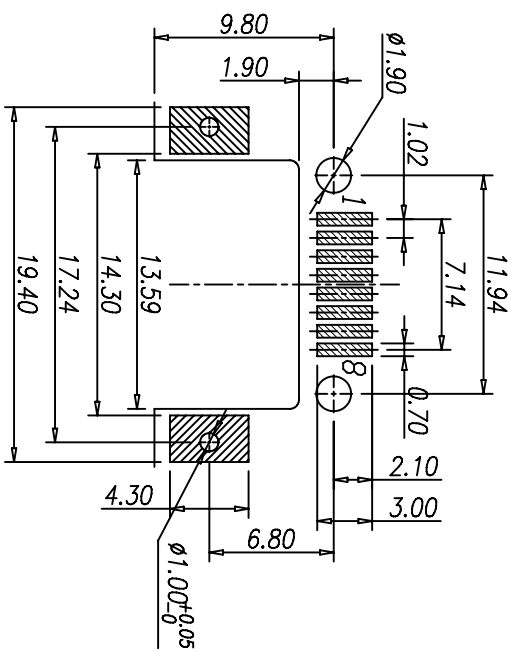

- SPECIFICATIONS:
1. Voltage: 150V AC RMS
  2. Current Rating: 1.5A
  3. Contact Resistance: 40mΩ MAX.
  4. Insulation Resistance: 500MΩ MIN.
  5. Dielectric Withstand Voltage :1000V AC
  6. Operature Temperature: -40°C~80°C
  7. Durability: 500 Mating Cycles MIN.

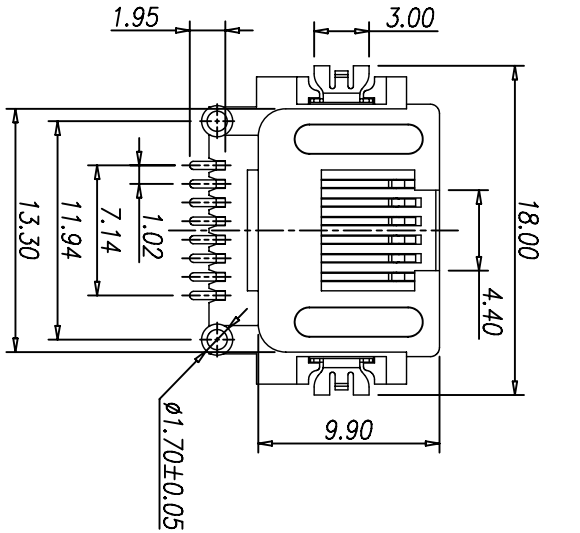


Recommend PCB Layout  
(Jack Top View)  
Tolerance: ±0.05mm

Material & Plating

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating

c	Shielding	1	Brass	Ni Plating	
b	Terminal	8	Phosphor Bronze	Au/Tin Plating	
a	Housing	1	LCP UL94V-0	Black	
NO.	PART NAME	Q'ty	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES			SCALE:1/1		UNIT: mm			DWG.NO:	
			SIZE: A3	PAGE:1	OF 1	REV:A01		WI-061-011	
DECIMALS:			APPROVED BY		CHECKED BY		PREPARED BY		
X ±0.5									
X.X ±0.3									
X.XX ±0.2			DICK		XSY		XSY		
CUSTOMER COPY									