


Notes

1. Flaggers shall give eastbound SE Concord Rd traffic priority to prevent queuing back to lit intersection
2. Flaggers shall have light plants during non-daylight hours and maintain high levels of visibility at all times
3. Maintain 11' minimum lane width for auto traffic at all times
4. Cone spacing at 35 MPH | Taper = 20' | Tangent = 20' | Corner/Access/Bike/Ped = 10'
5. All traffic control shall adhere to current MUTCD & OTTCH guidelines
6. Adjust to field conditions

Equipment List

- 8 Road Work Ahead  
2 Be Prepared to Stop  
3 Flagger Ahead  
25 28" Cones  
2 Flaggers with Radios  
1 Protection Vehicle

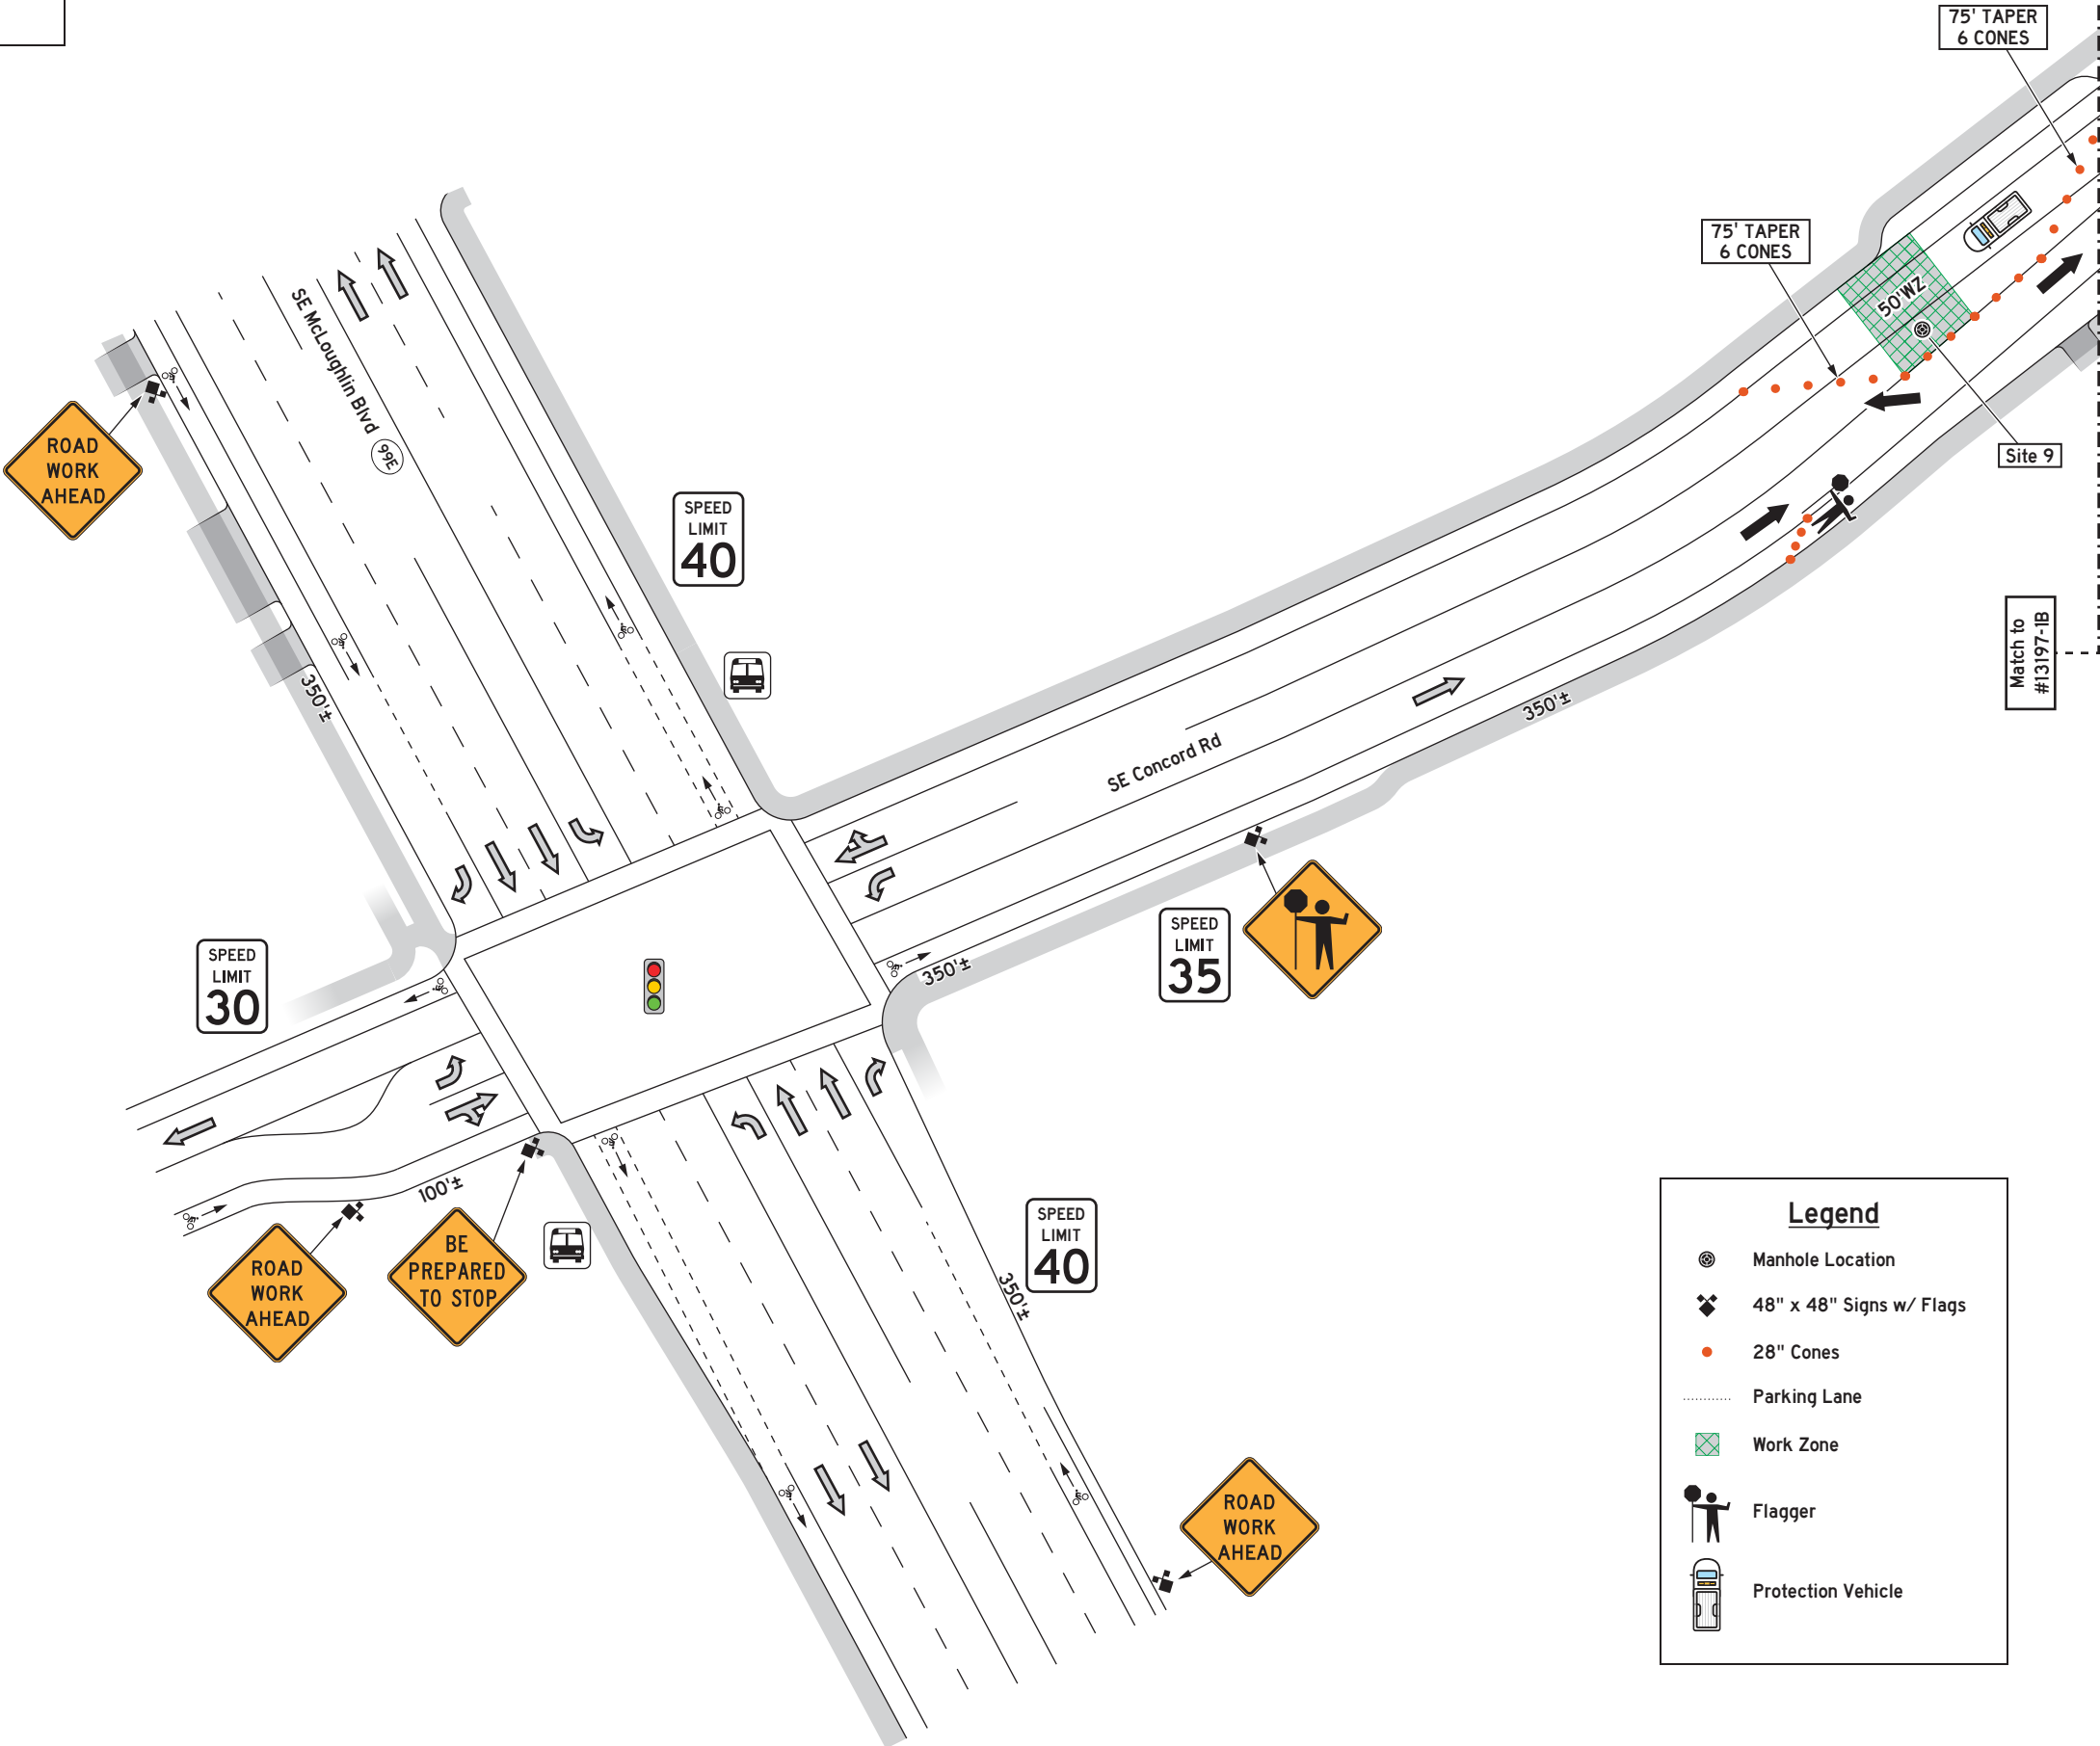

1A

Site 9

Match to  
#13197-1B

Legend

- Manhole Location
- 48" x 48" Signs w/ Flags
- 28" Cones
- Parking Lane
- Work Zone
- Flagger
- Protection Vehicle




**D&H  
FLAGGING**  
EST. 1988

D&H PLAN #13197-1A  
November 20, 2025

Prepared By: Adam Albers  
Office: (503) 232-2488  
Email: plans@d-hflagging.com

Contractor: SFE Global Inc  
Contact Person: Dylan Carvin  
Phone: 928-606-9469  
Email: Dylan.Carvin@sfe-global.com  
Job Location: SE Concord Rd & SE Harold Ave  
City, State: Oak Grove, OR  
Type of Work: Flow Monitoring Site Installation  
Job Duration: 2-4 Hours Per Location

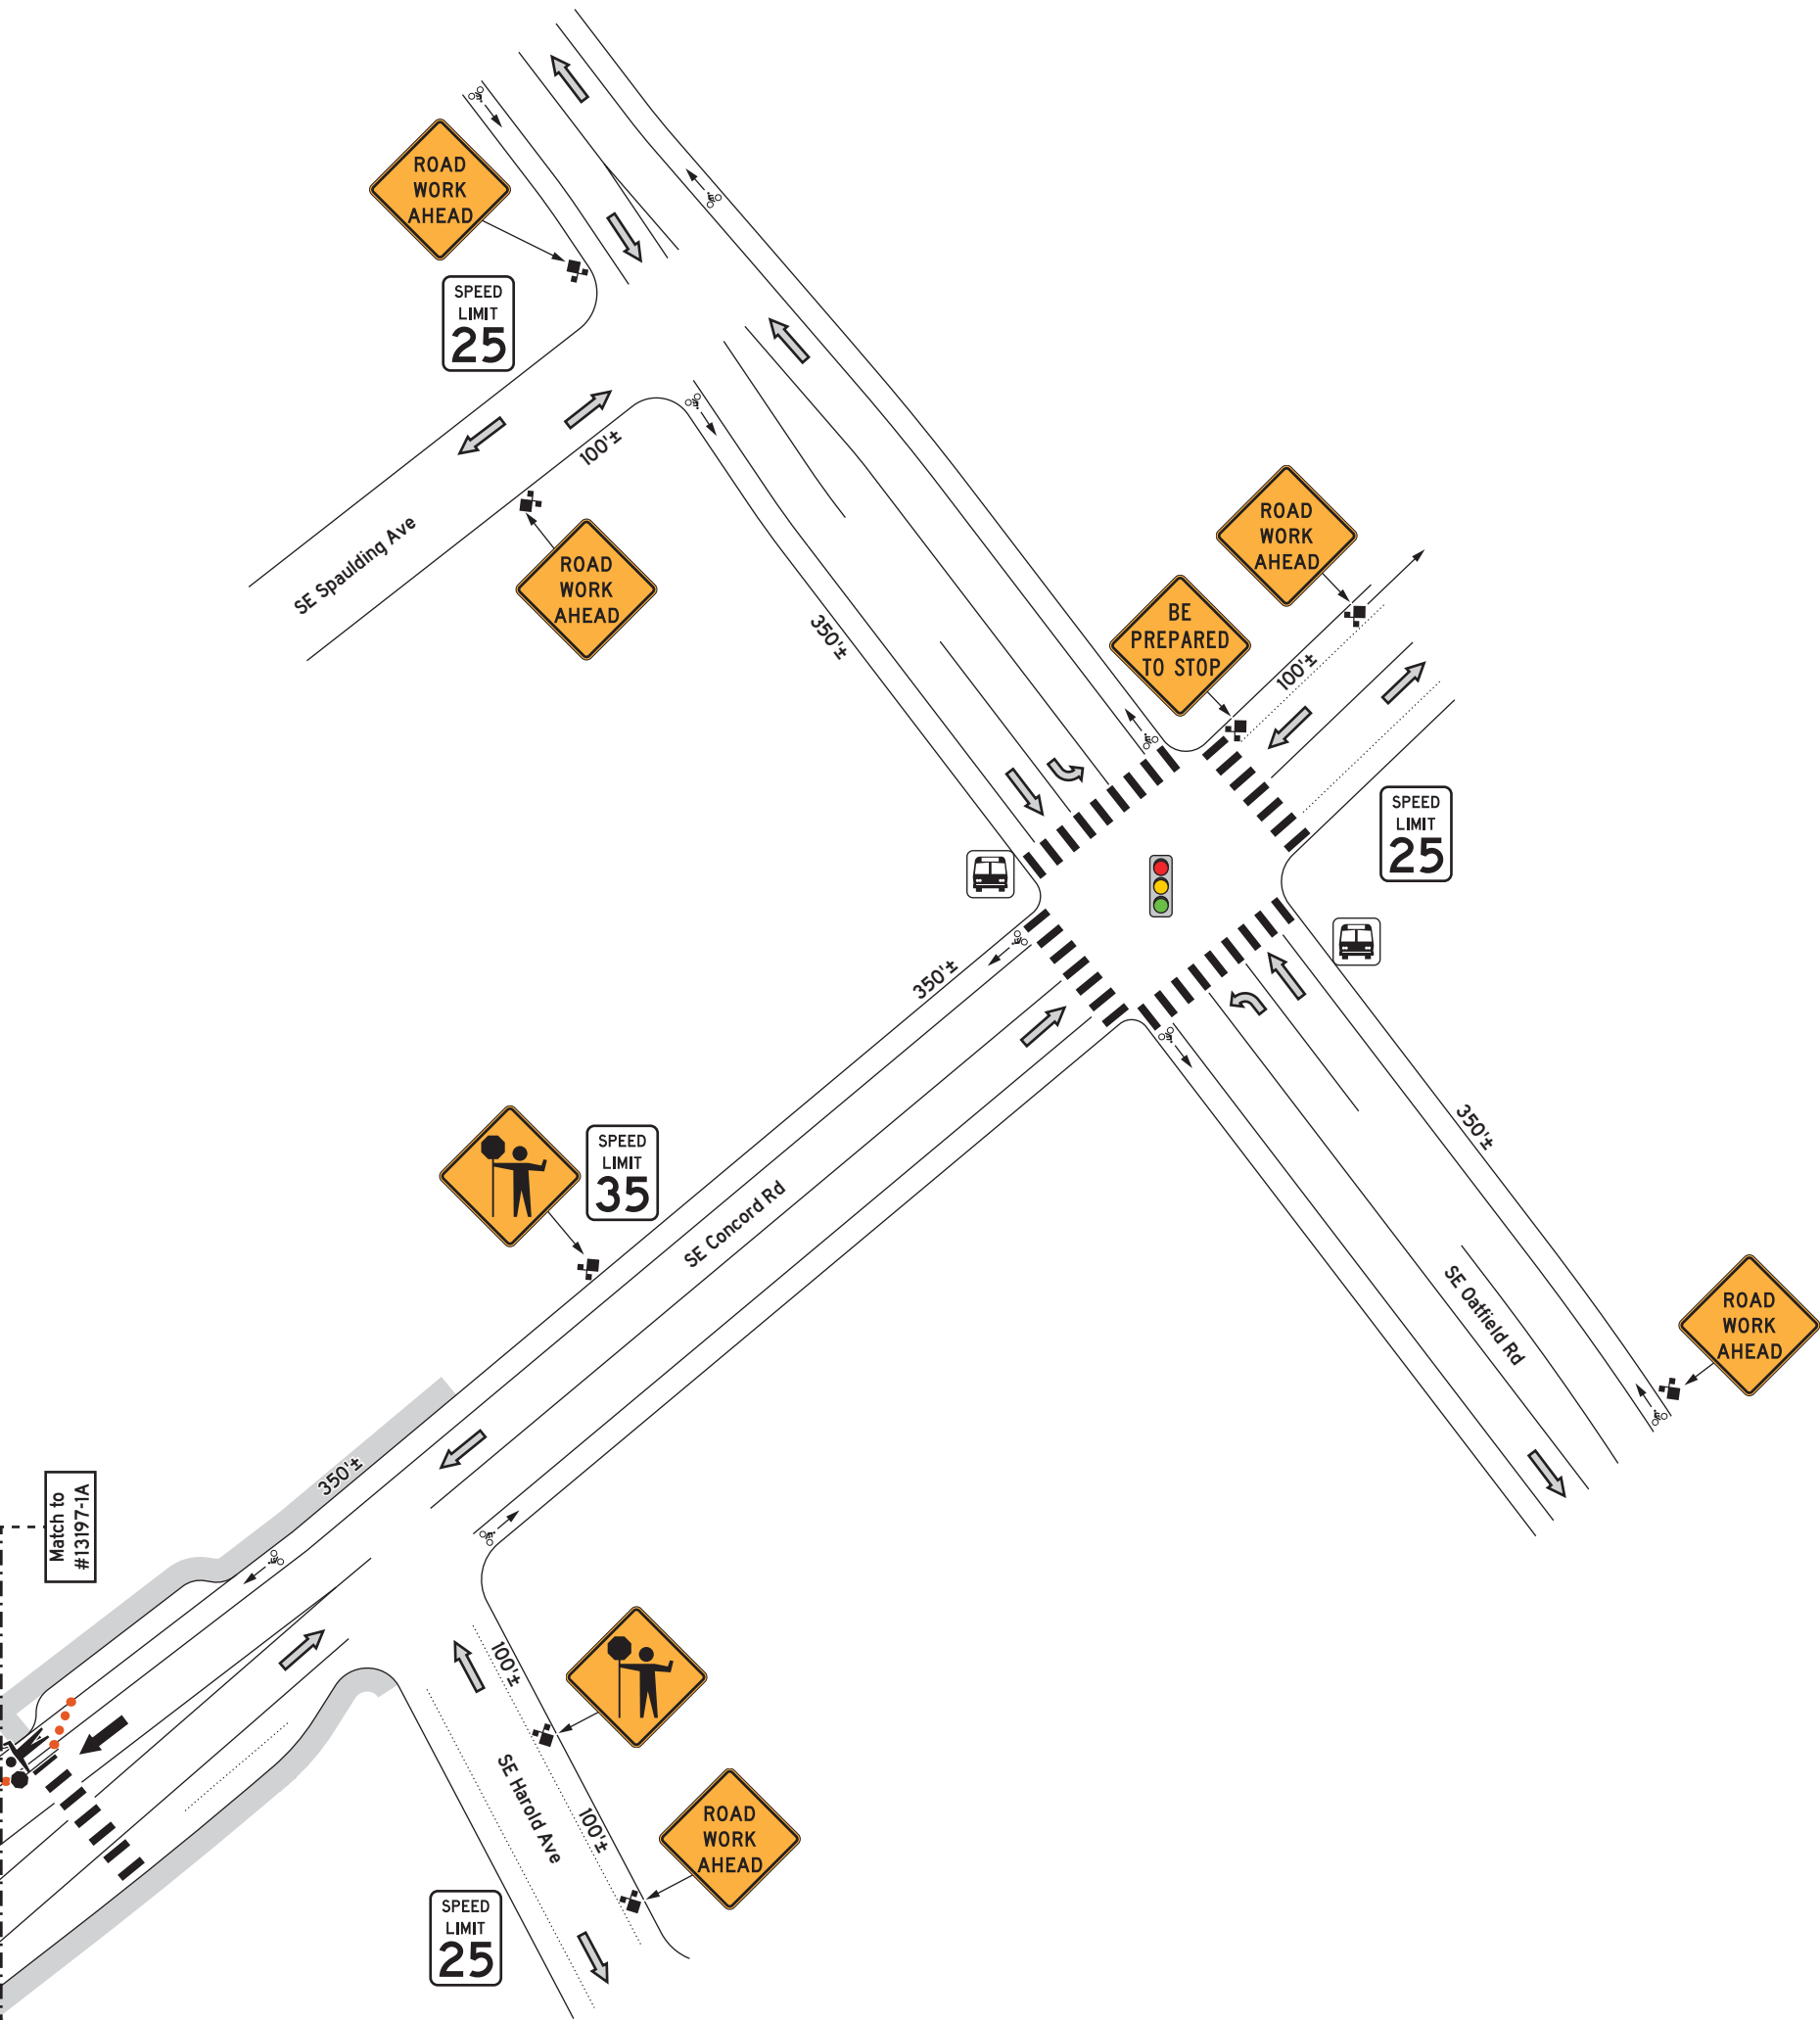

1B

**D&H PLAN #13197-1B**  
November 20, 2025

Prepared By:	Adam Albers
Office:	(503) 232-2488
Email:	plans@d-hflagging.com
Contractor:	SFE Global Inc
Contact Person:	Dylan Carvin
Phone:	928-606-9469
Email:	Dylan.Carvin@sfeglobal.com
Job Location:	SE Concord Rd & SE Harold Ave
City, State:	Oak Grove, OR
Type of Work:	Flow Monitoring Site Installation
Job Duration:	2-4 Hours Per Location

Legend

Manhole Location

48" x 48" Signs w/ Flags

28" Cones

Parking Lane

Work Zone

Flagger

Protection Vehicle