



PT. YUSANO JAYA PRATAMA

The background of the entire page is a photograph of an oil rig at sea during sunset. The sky is a mix of orange, yellow, and blue. The rig is a dark silhouette against the bright sky. Overlaid on this image are several geometric shapes: a large, semi-transparent orange hexagon in the center, and various orange and yellow triangles and polygons at the bottom and sides. The text 'COMPANY PROFILE' is centered within the hexagon.

**COMPANY
PROFILE**



2023

TABLE OF CONTENTS

ABOUT US

VISION AND MISSION

BUSINESS ACTIVITIES

PRODUCTS

GET IN TOUCH

ABOUT US

OUR COMPANY

PT YUSANO JAYA PRATAMA (YJP) set up by professionals in Oil & Gas Industry, Professional in Supplier to accommodate business opportunities with focus on the oil & gas and energy industry. YJP was formed on 07 November 1981 in front of Anthony Sjoenardi, SH, public notary in Jakarta. Ever since YJP mainly focus on business of oil & gas, Industrial, Mining and Power Plant.

The growth of YJP business will be contributed by the trading activities on engine YJP & will be maintained by the stabile businesses any partnership

OUR SERVICES

- Supplier and Trading
- Oil and Natural Gas Processing Industry
- Supporting Services in the development Oil and Natural Gas Exploration
- High-rise Building Supplying, roads & bridge building supplying, Refinery building, Port system & building supplying, Mining system & Construction supplying




Vision

To be Indonesian's leading indigenous supplier company.

Mission


- To promote value added Supplier innovation to maximize resources, minimize waste and deliver consistent excellence.
- To become the preferred partner of regional and global industry players.
- To provide our stakeholders with the highest return on investment in the industry.

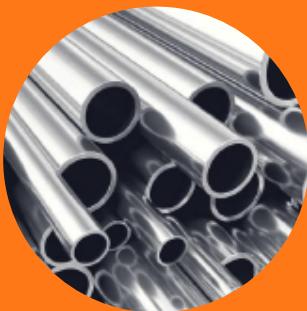


BUSINESS ACTIVITIES

- PCP Application –Artificial Lift System
- Compact Compressors Gas and Multiphase Pumps
- Oil and Natural Gas Processing Industry
- Supporting Services in The Development of Oil and Gas Exploration
- Supporting Well Accessories for Wellhead, Sucker Rod, Tubing Pump
- MANTL Canada PC Pumps
- Equipment Rental and Supply
- High-rise building supplying, road & bridge building supplying, refinery building, port system & building supplying, mining system & construction supplying

STRATEGIC PLAN

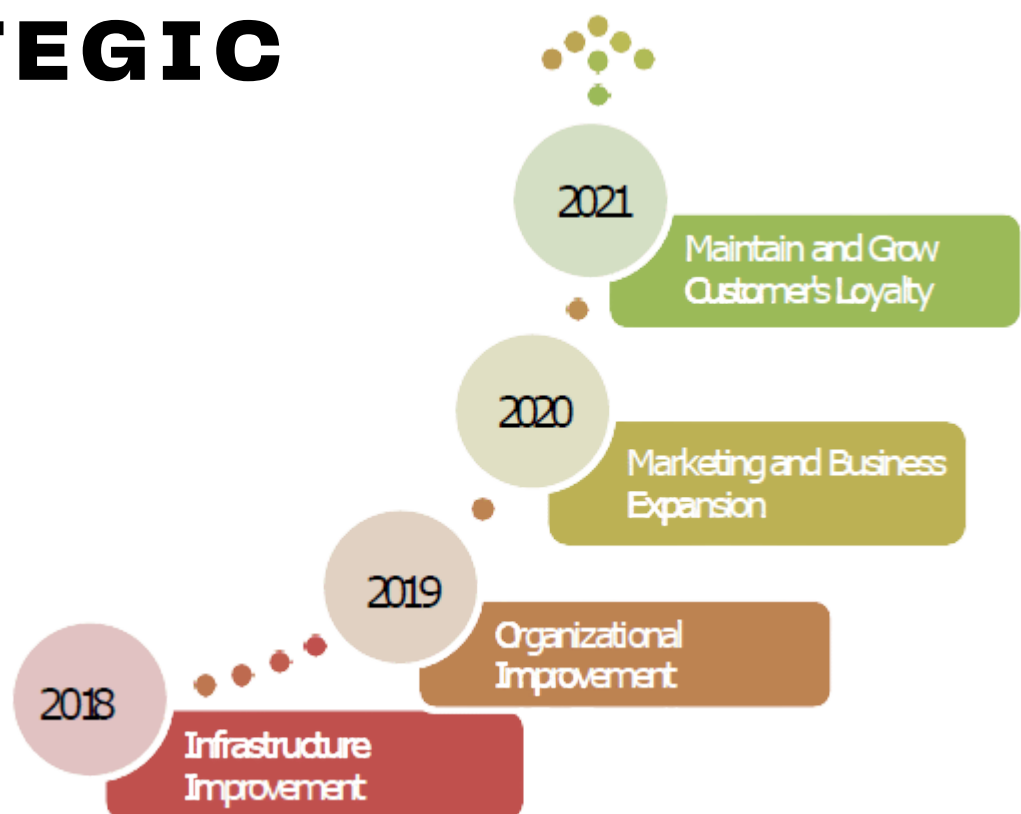

HCG15		CHC0615 Specifications			
Compressor	Type	Hydraulic drive low speed reciprocating compressor			
	Capacity Control	Automatic by PLC, 100% turndown			
	Wiring	Class 1 Div 2 Hazardous location			
	Piping	SA-106B Threaded spools			
	Max Discharge Pressure	1100 psi std / 1500 optional		7600 / 10300 kPa	
	Max Design Discharge Temperature	400°F		200°C	
		613 Cylinder		616 Cylinder	
	Max ΔP	225 psi	1550 kPa	350 psi	2410 kPa
	Max Geometric Displacement	28 mcf/d	787 m ³ /day	18 mcf/d	523 m ³ /day
2 Phase Max Continuous Water Flow	n/a	n/a	164 bbl/d	26 m ³ /day	
Hydraulic Power Pack	Driver	15 hp 3 phase TEFC electric motor 1800 rpm			
	Pump	Internal gear pump			
	Hydraulic Oil Filter	6 Micron			
	Oil Capacity	34 gal/129 L			
	Cooling	Finned Tube, fan-cooled			
	Oil Temperature Control	Automatic: warm-up valve, air intake louver, cold-start protection			
Wiring	General purpose (remote from compressor)				
Controls and Instrumentation	System Control	PLC with data logging			
	Readout	Multifunction LCD display			
	Web Enabled Remote Monitoring	Satellite callout for operating conditions, Alarms, Shutdowns			
Alarms and Shutdowns		Alarm		Shutdown	
	Suction Pressure Low	✓			
	Discharge Pressure High	✓			
	Differential Pressure High	✓			
	Discharge Temperature High	✓			
	Oil Temperature Low	✓			
	Oil Temperature High	✓		✓	
	Oil Leak	✓		✓	
	Oil Level Low	✓		✓	
	Oil Filter High ΔP	✓			
	Motor Overload			✓	
ESD			✓		
Weight and Dimensions	Compressor on Pumpjack Direct Mount	612 lb / 280 kg	98" x 20" / 248 cm x 51 cm		
	Compressor on Concrete Slab	2084 lb / 945 kg	98" x 24" / 248 cm x 61 cm		
	Power Pack	1285 lb / 580 kg	78" x 50" / 198 cm x 126 cm		
	Inlet Connector	1" NPT	Hose available		
	Discharge Connector	1" NPT	Hose available		
Key Features		Options			
• No operator setup or adjustment required • Minimum moving parts, minimum maintenance • Self start/auto restart after power outage • Satellite call system allows instant notification of shutdowns • No welding or cutting required for pump jack installation • No process valves • No extra equipment required for process liquid handling (scrubber, blowcase, pump, float switch)		• High discharge pressure transmitter • Power pack sound baffles • Piping for corrosive process gas • Compressor mounting: Pumpjack direct mount or freestanding on concrete slab • Hydraulic heat trace • High volume hydraulic pump for low ΔP (613 cylinder only)			

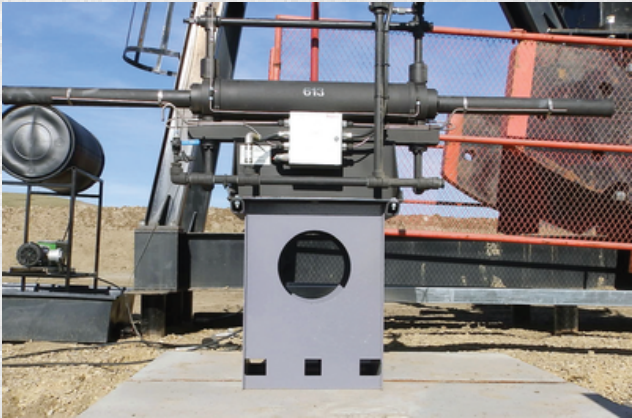

HCG50		CHC1050 Specifications			
Compressor	Type	Hydraulic drive low speed reciprocating compressor			
	Capacity Control	Automatic by PLC, 100% turndown			
	Wiring	Class 1 Div 2 Hazardous location			
	Piping	SA-106B Threaded spools			
	Max Discharge Pressure	1100 psi std / 1500 optional		7600 / 10300 kPa	
	Max Design Discharge Temperature	400°F		200°C	
		1022 Cylinder		1028 Cylinder	
	Max ΔP	225 psi	1550 kPa	380 psi	2620 kPa
	Max Geometric Displacement	77 mcf/d	2180 m³/day	48 mcf/d	1350 m³/day
2 Phase Max Continuous Water Flow	411 bbl/d	65 m³/day	425 bbl/d	67 m³/day	
Hydraulic Power Pack	Driver	50 hp 3 phase TEFC electric motor			
	Pump	Gear or vane			
	Hydraulic Oil Filter	3 Micron			
	Oil Capacity	69 gal / 260 L			
	Cooling	Finned tube, fan-cooled			
	Oil Temperature Control	Automatic: warm-up valve, air intake louver, cold-start protection			
	Wiring	General purpose (remote from compressor)			
Controls and Instrumentation	System Control	PLC with data logging			
	Readout	Multifunction LCD display			
	Web Enabled Remote Monitoring	Satellite callout for operating conditions, Alarms, Shutdowns			
Alarms and Shutdowns	Alarm		Shutdown		
	Suction Pressure Low				
	Discharge Pressure High				
	Differential Pressure High				
	Discharge Temperature High				
	Oil Temperature Low				
	Oil Temperature High		Oil temperature high		
	Oil Leak		Oil leak		
	Oil Level Low		Oil level low		
	Oil Filter High ΔP				
			Motor overload		
			ESD		
Weight and Dimensions	Compressor on Concrete Slab	2600 lb / 1180 kg	96" x 24" / 244 cm x 61 cm		
	Power Pack	2600 lb / 1180 kg	96" x 53" / 244 cm x 135 cm		
	Inlet Connector	2" NPT	1-1/2" Hose available		
	Discharge Connector	2" NPT	1-1/2" Hose available		
Key Features		Options			
• No operator setup or adjustment required • Minimum moving parts, minimum maintenance • Self start/auto restart after power outage • Satellite call system allows instant notification of shutdowns • No welding or cutting required for pump jack installation • No process valves • No extra equipment required for process liquid handling (scrubber, blowcase, pump, float switch)		• High Discharge Pressure transmitter • Piping for Corrosive Process Gas • Hydraulic heat trace			





MPTP

MULTIPHASE TRANSFER PUMP (MPTP)

Compact Compression's Multiphase Transfer Pump (MPTP) is directly descended from the ground-breaking HCG Compressor, several of which have been employed in multiphase pumping service. Its principle of operation is very similar to the HCG Compressor with several key enhancements to product design and materials to increase performance, reliability and serviceability for multiphase pumping applications.

The MPTP is specifically designed for use at a satellite or header where production from multiple wells is collected. The resulting drop in line pressure allows the wells feeding into the MPTP to produce more.

The MPTP costs less than installing individual compressors on each well, has more throughput with less peak power demand and has a lower service cost than an HCG Compressor in multiphase service.

FEATURES

- Capable of liquid fractions 0 – 100%
- Liquid rates up to 2660 m³/d (16,730 bpd)
- Maximum ΔP up to 2415 kPa (350 psi)
- Handles wide range of API gravity & viscosity
- 100% turndown capability
- No minimum liquid volume required through pump
- Highly tolerant of entrained solids
- Extremely robust intake and discharge valve design
- Optimized power utilization
- Seals can be easily replaced on site
- No additional lifting equipment required for servicing
- Superior user interface – web browser HMI




MPTP50		MPTP Specifications			
Multiphase Pump	Type	Hydraulic drive low speed reciprocating multiphase pump			
	Capacity Control	Automatic by PLC, 100% turndown			
	Wiring	Class 1 Div 2 Hazardous location			
	Piping	SA-106B Threaded spools			
	Max Discharge Pressure	1100 psi std / 1500 optional		7600 / 10300 kPa	
	Max Design Discharge Temperature	400°F		200°C	
		Low pressure pump		Very high pressure pump	
	Max ΔP	170 psi	1172 kPa	350 psi	2413 kPa
Hydraulic Power Pack	Max Continuous Liquid Flow	16730 bbl/d	2660 m³/day	8550 bbl/d	1360 m³/day
	Driver	50 hp 3 phase TEFC electric motor			
	Pump	Internal Gear			
	Hydraulic Oil Filter	6 Micron			
	Oil Capacity	69 gal / 260 L			
	Cooling	Finned tube, fan-cooled			
	Oil Temperature Control	Automatic: warm-up, air intake louver, cold-start protection			
Controls and Instrumentation	Wiring	General purpose (remote from compressor)			
	System Control	PLC with data logging			
	Readout	PLC hosted wifi with web browser HMI			
Alarms and Shutdowns	Web Enabled Remote Monitoring	Cellular Network IOT system			
		Alarm		Shutdown	
	Suction Pressure Low	✓			
	Discharge Pressure High	✓			
	Differential Pressure High	✓			
	Discharge Temperature High	✓			
	Oil Temperature Low	✓			
	Oil Temperature High	✓		✓	
	Oil Leak	✓		✓	
	Oil Level Low	✓		✓	
Weight and Dimensions	Oil Filter High ΔP	✓			
	Motor Overload			✓	
	ESD			✓	
	Compressor on Concrete Slab	3200 lb / 1452 kg	172" x 25" / 437 cm x 64 cm		
Key Features	Power Pack	2750 lb / 1247 kg	103" x 53" / 262 cm x 135 cm		
	Inlet Connector	2" #600 Flange	1-1/2" Hose available		
	Discharge Connector	2" #600 Flange	1-1/2" Hose available		
Options		Options			
• No operator setup or adjustment required		• High discharge pressure transmitter			
• Minimum moving parts, minimum maintenance		• Hydraulic heat trace			
• Self-start/auto restart after power outage					
• Call system allows instant notification of shutdowns					
• No process valves					
• Liquid fractions from 0 - 100%					
• 100% turndown					
• Seals easily replaced on site; no additional lifting equipment required for servicing					
• Piping for corrosive gas					





MANTL

PROGRESSIVE CAVITY PUMP

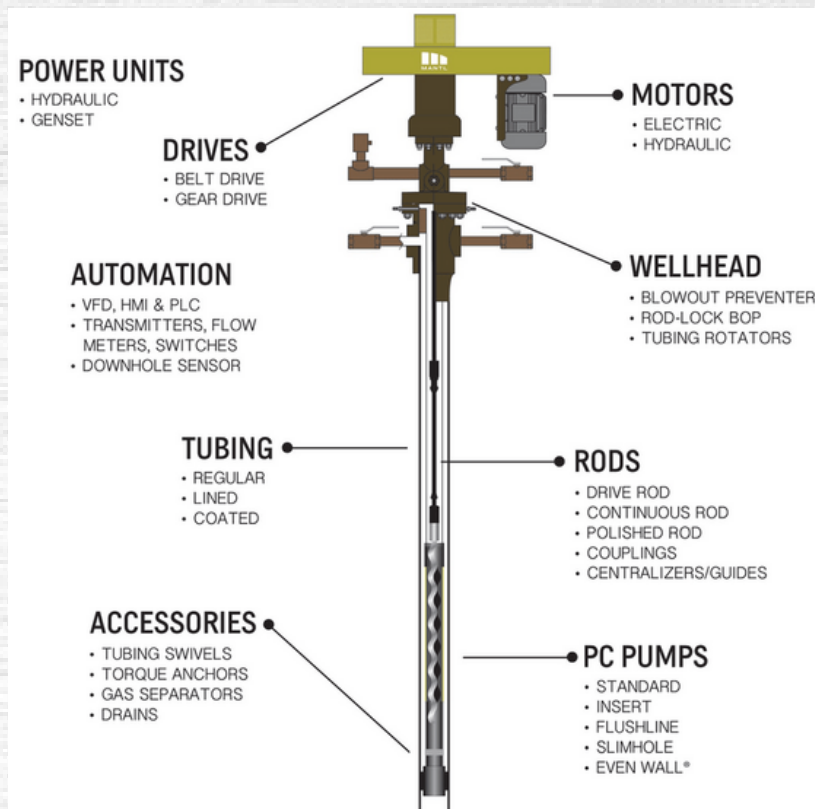

ROTOR SELECTION GUIDE

ROTOR

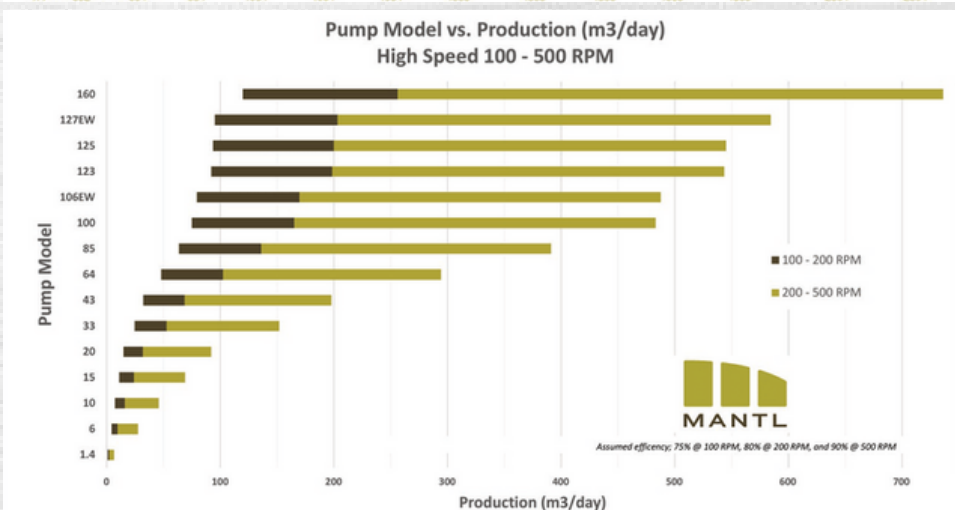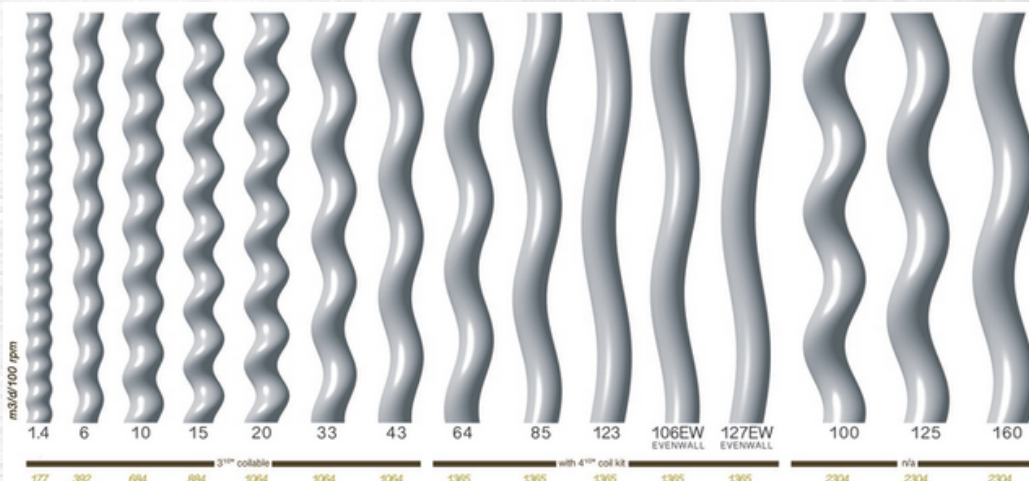

PROGRESSING CAVITY PUMP TECHNICAL SPECIFICATION

MANTL

PCP TECHNICAL SPECIFICATION

Metric	Imperial	Lift					Length*		Collable 3 1/2" tubing 3/4" coil
m3/d/ 100 rpm	BPD/d/ 100 rpm	m	ft	Rotor Connection Pin	Standard Stator Top Connection	Maximum Stator OD	Meters	Feet	
64	402	600	1968	1" SH modified	3 1/2" EUE Box w/ 4" Orbit Tube or 4" NU Pin	4.252"	(108 mm)	3.50	11.5
		900	2952					5.25	17.2
		1200	3936					7.00	23.0
		1500	4920					8.75	28.7
		1800	5904					10.50	34.4
		2100	6888					12.25	40.2
85	535	700	2296	1" SH modified	3 1/2" EUE Box w/ 4" Orbit Tube or 4" NU Pin	4.252"	(108 mm)	4.55	14.9
		1050	3444					6.83	22.4
		1400	4592					9.10	29.8
		1750	5740					11.38	37.3
		2100	6888					13.65	44.8
100	629	800	2624	1 1/8" SH	3 1/2" EUE Box w/ 4" Orbit Tube or 4 1/2" EUE Box	5.000"	(127 mm)	4.50	14.8
		1200	3936					6.76	22.2
		1600	5248					9.01	29.5
		2000	6560					11.26	36.9
106EW	667	400	1312	1" SH modified	3 1/2" EUE Box w/ 4" Orbit Tube or 4" NU Pin	4.252"	(108 mm)	2.56	8.4
		800	2624					5.12	16.8
		1200	3936					7.68	25.2
		1600	5248					10.24	33.6
123	774	600	1968	1" SH modified	3 1/2" EUE Box w/ 4" Orbit Tube or 4" NU Pin	4.252"	(108 mm)	5.60	18.4
		900	2952					8.40	27.6
		1200	3936					11.20	36.7
		1500	4920					14.00	45.9
125	786	800	2624	1 1/8" SH	3 1/2" EUE Box w/ 4" Orbit Tube or 4 1/2" EUE Box	5.000"	(127 mm)	5.60	18.4
		1200	3936					8.35	27.4
		1600	5248					11.10	36.4
		2000	6560					13.85	45.4
127EW	799	400	1312	1" SH modified	3 1/2" EUE Box w/ 4" Orbit Tube or 4" NU Pin	4.252"	(108 mm)	3.02	9.9
		800	2624					6.04	19.8
		1200	3936					9.06	29.7
		1600	5248					12.08	39.6
160	1006	650	2132	1 1/8" SH	3 1/2" EUE Box w/ 4" Orbit Tube or 4 1/2" EUE Box	5.000"	(127 mm)	5.60	18.4
		810	2657					6.98	22.9
		975	3198					8.35	27.4
		1300	4264					11.10	36.4
		1625	5330					13.85	45.4

*Orbit tube not included; when optional add 1219 mm (48")

Maximum pump assembly element body, collars and tag bar connections may be larger.

Metric	Imperial	Lift						Length*		Coilable 3 1/2" tubing 3/4" coil
m3/d/ 100 rpm	BPD/d/ 100 rpm	m	ft	Rotor Connection Pin	Standard Stator Top Connection	Maximum Stator OD		Meters	Feet	
1.4	9	1200	3936	5/8" SH modified	1.90" NU Box	2.165"	(55 mm)	1.20	3.9	Yes
		1800	5904					1.80	5.9	
		2400	7872					2.40	7.9	
6	38	600	1968	3/4" SH modified	2 3/8" EUE Pin	2.833"	(72 mm)	1.14	3.7	
		1200	3936					2.28	7.5	
		1800	5904					3.41	11.2	
10	63	2400	7872	7/8" SH modified	3 1/2" NU Pin or 2 7/8" EUE Box	3.500"	(90 mm)	4.55	14.9	
		900	2952					1.96	6.4	
		1200	3936					2.63	8.6	
15	94	1800	5904	7/8" SH modified	3 1/2" NU Pin or 2 7/8" EUE Box	3.500"	(90 mm)	3.92	12.9	
		2400	7872					5.21	17.1	
		2700	8856					5.88	19.3	
20	126	900	2952	1" SH modified	3 1/2" EUE Pin	3.740"	(95 mm)	2.12	6.9	
		1200	3936					2.83	9.3	
		1350	4428					3.17	10.4	
33	208	1800	5904	1" SH modified	3 1/2" EUE Pin	3.740"	(95 mm)	4.23	13.9	
		2400	7872					5.63	18.5	
		2700	8856					6.35	20.8	
43	270	900	2952	1" SH modified	3 1/2" EUE Pin	3.740"	(95 mm)	2.25	7.4	
		1200	3936					3.02	9.9	
		1800	5904					4.50	14.8	
6 INSERT	38	2400	7872	3/4" SH modified	2 3/8" EUE Pin	3.740"	(95 mm)	5.99	19.6	
		2700	8856					6.75	22.1	
		600	1968					2.25	7.4	
16 INSERT	101	900	2952	3/4" SH modified	2 3/8" EUE Pin	3.740"	(95 mm)	3.38	11.1	
		1200	3936					4.50	14.8	
		1500	4920					5.63	18.5	
43 INSERT	270	1800	5904	3/4" SH modified	2 3/8" EUE Box	2.795"	(71 mm)	6.75	22.1	
		2100	6888					9.00	29.5	
		2400	7872					10.49	34.4	
6 INSERT	38	600	1968	3/4" SH modified	2 3/8" EUE Box	2.677 or 2.833" (68 or 72 mm)		1.14	3.7	3 1/2"
		1200	3936					2.28	7.5	
		1800	5904					3.41	11.2	
16 INSERT	101	2400	7872	3/4" SH modified	2 3/8" EUE Box	2.795"	(71 mm)	4.55	14.9	
		1200	3936					5.13	16.8	
		1600	5248					6.82	22.4	
43 INSERT	270	350	1148	3/4" SH modified	2 3/8" EUE Box	2.677"	(68 mm)	2.90	9.5	
		700	2296					5.80	19.0	
		1050	3444					8.70	28.5	
		1200	3936					10.15	33.3	
		1400	4592					11.60	38.0	

*Orbit tube not included when optional add 1219 mm (48")

Maximum pump assembly element body, collars and tag bar connections may be larger

SPECIALITY PUMPS

Models	Flushline	Slimhole
6		2.677" (68 mm)
10/15	3.500" (90 mm)	-
20/33/43	3.740" (95 mm)	-
64/85/123	4.252" (108 mm)	3.898" (99 mm)
106EW/127EW	4.252" (108 mm)	-
100/125/160	5.000" (127 mm)	-

All models come with welded orbit tube (except 6/10/15)



MANTL



MANTL

MB-075-10T



MB-075-10T	
Rating	
Power rating, kW / HP	55 / 75
Maximum Polished Rod Speed (RPM)	500
Thrust Bearing rating, ISO (kN / lbs)	720 / 161,970
Thrust Bearing rating, L10 @ 500 RPM 25,000 hours (kN / lbs)	97 / 21,805
Maximum input torque (Nm / ft-lbs)	2,034 / 1,500
Structural	
Belt guard	Fully enclosed hinged
Polished rod size, in.	1 1/4" or 1 1/2"
Wellhead connection	3 1/8" 3,000 lbs R-31 Flange
Maximum Driven Sheave (OD x Type x Groove)	31.5 x 5V x 6
Overall Height (mm / inches)	1346 / 53
Drivehead Weight (kg / lbs)	505 / 1111
Braking System	
Recoil control system	Centrifugal wet brake
Optional Equipment	
Environmental Seal Integral (4 Seals)	
Environmental Seal Booth	
Rope Packing Seal	
Leak Detection System	
Anti-Ejection Clamp	
Tachometer	

INSERTABLE PCP



TUBING SIZE :

2 7/8: EUE 6.5 lbs/ft (2.441 ID, 2.347 drift)
9.67 kg/m (62.00 ID, 59.61 drift)

PUMP SIZE 001.4M-FL-005

3 1/2:" EUE 9.30 lbs/ft (2.992 ID, 2.867 drift)
13.84 kg/m (76.00 ID, 72.82 drift)

PUMP SIZE 006M-SH-IP-068
 016M-SH-IP-068
 043M-FL-IP-068

4 1/2' EUE 12.75 lbs/ft (3.958 ID, 3.833 drift)
18.97 kg/m (100.5 ID, 97.36 drift)

PUMP SIZE 006M-STD-072
 010/015M-FL-090
 020/033/043-FLOT-095



MANTL



PCP SUBDRIVE

MANTL'S PCP SUBDRIVE can be tailored to meet the needs of your specific well. Utilizing permanent magnet motor (PMM) technology to drive the PCP, the torque remains constant throughout the speed range of the pump. By eliminating the rod string the pump is more easily placed in severe dog leg and horizontal wells and saves on surface driven equipment and maintenance.

- Install PM motor below perforations without shroud or circulating tubes
- Better motor performance / protection in gassy applications
- Use motor with minimum ID to improve gas natural separation
- Reduce operating cost through electrical power savings
- Short motor length allows installations in wells with high dogleg severity
- Directly run PCP without using a gearbox - reliable bottom-drive
- PM motor dissipates heat better than traditional induction motor

INCREASED SAFETY

INCREASED POWER EFFICIENCY


ELIMINATES TUBING WEAR & ROD ISSUES

APPLICATIONS

HIGHLY ABRASIVE FLUIDS
HIGH SCALE & ASPHALTENE WELLS
HEAVY OIL
DEVIATED & HORIZONTAL OR CROOKED WELLS
LOW FLOWRATE & UNSTABLE INFLOW WELLS
HIGH VISCOSITY WELLS



PCP SUBDRIVE SYSTEM

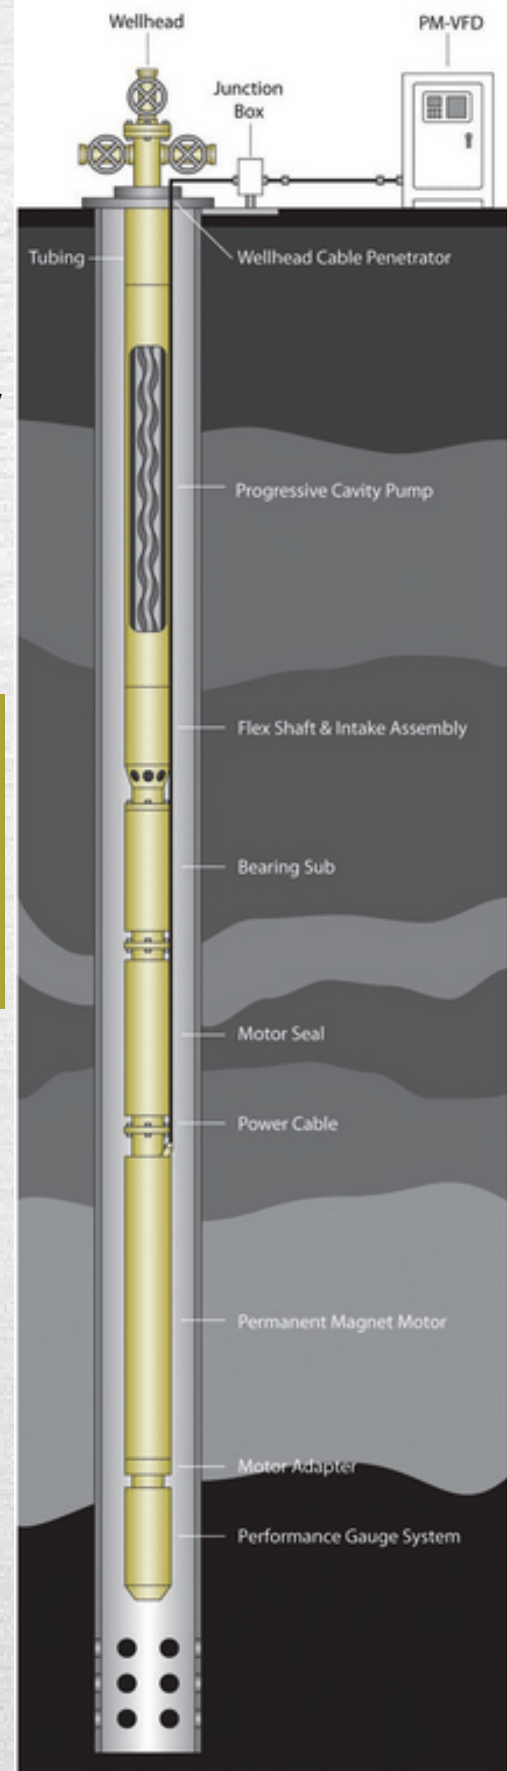

Reinforced Thermo Plastic Pipes (RTP) are sometimes also called: "Flexible Flowline", "Flexible Linepipe", "Spoolable Reinforced Plastic Linepipe", "Flexible Reinforced Pipe", "Reinforced Line Pipe" or "Spoolable Composites". For offshore use other names include "Offshore Flexibles" or "Flexible Umbilical Risers". Although the RTP was originally developed for the Oil and Gas industry, they are also used for Water, Mining and many other applications.


Reinforced Thermo Plastic Pipes (RTP) are the next generation in high pressure pipelines. The RTP system is **Corrosion-Scaling and Maintenance Free**, and suitable for a wide range of applications, making it the 21st century pipeline solution.



Our RTP are built out of three layers:


- a liner pipe made from HDPE 100 (Highdensity Polyethylene),
- a reinforcement layer
- a HDPE 80 outer cover layer.

RTP system has the additional benefit of being completely **BONDED**. *This means that all the layers are bonded together to form one strong unit.* This enables the RTP system to have unique features versus conventional steel or carbon steel pipelines and other PE Pipes in the area of reliability, corrosion resistance, flexibility, installation speed and re-usability

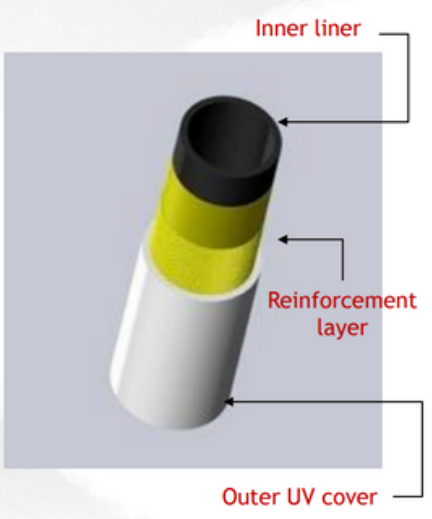

Reinforced Thermoplastic Pipes (RTP)

Our RTP's main feature is its **ability to spool** in coils of 1000m (2 inch), 700m (4 inch), 500m(6 inch) and 250m(8 inch).



STRUCTURE	FUNCTION	MATERIAL
1. Inner Tube	For Fluid Transportation	HDPE 100
2. Reinforcement Layer	Endure Internal Pressure	Polyester Filament Yarn
3. Outer Layer	UV Protection Armour	HDPE 80

HDPE
High Density Polyethylene (HDPE)
6m or 12m



THEIR'S
(Traditional HDPE Pipe)
500m length = 42 joints

vs

RTP
Reinforced Thermo Plastic Pipes (RTP)
500m



OUR'S
(Our RTP Pipe)
500m length = 0 joint


Based on 6" pipe*



Product Offerings and Features

We offer Reinforced Thermo Plastic Pipes (RTP) for various industries:

- 2" in 1000m Reel
 - 4" in 700m Reel
 - 6" in 500m Reel
 - 8" in 250m Reel
- To Customer's Specifications*



Product Features

Keys to Market Acceptance:

- ❖ Quick & Ease of Installation - up to 2 km per day
- ❖ Less Manpower – minimal
- ❖ Long Lengths Per Coil – up to 1000m per coil (2 inch)
- ❖ Corrosion & Chemical Resistant
- ❖ Environment Friendly
- ❖ Long `Life Span – 25 years (exposed) to over 50 years (buried)
- ❖ Maintenance Free
- ❖ Food Grade

End Fittings Specification

- Specifications and Standards for RTP End Fittings
API Spec15S &17J, API Spec 17K, ASME VIII Div. II, ASME IX, ASME B16.5, NACE MR0175, etc.;
- Weldneck End-Fitting Flanged End-Fitting
- Material of End Fittings
- Carbon steel: ASTM A105, ASTM A350 LF2
- Stainless Steel: ASTM A182 F304/304L, F316/316L,
- Special alloy steel: Inconel 625, Incoloy 825
- Options :
- To Customer's Specification

Standards and Certifications

- Our RTP Pipes are manufactured and certified completely under ISO 9001:2015.
- Designed in accordance to API 15S (American Petroleum Institute) for Spoolable Reinforced Plastic Line Pipe.



SAFETY EQUIPMENT

FOOTWEAR

Features :

- Quality textile Insulating Lining
- Comfort padding to protect Achilles tendon and ankle bone
- High Quality leather upper Top quality eyelet made from anti corrosion coated material
- Top quality polyester laces for maximum adjustment
- Non woven breathable lining Comfort Strip
- Safety steel toe cap 200 joules impact meets BS EN-345 standart
- Comfortable last long wearing cleated sole
- Stainless steel nail proof midsole
- Good Year - Welted Construction
- High abrasion resistant, anti slip outsole
- Anti-fungicidal insole board
- Elastic Suspension Steel
- Cushioned insole
- Heel Support for shape retention



HAND GLOVES

IMPACT GLOVES

Features :

- Heavy duty working gloves, safety glove, mechanic glove
- Synthetic leather palm of the working glove is tough, soft and comfortable to wear, resists shrinking, stretching and hardening
- Reinforce non-slip PVC leather palm of the glove for better grip and durability
- Breathable laminated ottoman black for flexibility and fit
- Elastic wrist cuff keeps debris out
- TPR knuckle for protection
- Available original synthetic leather



WORK WEAR

9Oz./255 gr 100% Cotton Flame Resistant BANOX CERTIFIED

Features:

- Two-Way Front Zipper with Snap-Over Fly
- Ruler Pocket - Right Leg
- Banded Waist with Elastic Across Back
- True Bi-Swing Action Back for Ease of Movement
- Swing Pocket with Side Entry
- Chest Pocket with Concealed Zipper Closure
- Rear Pockets - Left with Concealed Snap Flap Closure
- 2" Sto-Nor Hobart Reflective Tape
- 3M (scotchlight)



TAG-LINE

The production of combination rope with steel core requires skill and long experience. The relation between outer strands and centre core has to be balanced so that the load is distributed to all wires evenly. The quality is being controlled according to ISO 9001

TYPE	SIZE	IDENTITY
P/N. TG-161015F	Dia 16mm X 15 Ft Length	Green
P/N. TG-161020F	Dia 16mm X 20 Ft Length	Red
P/N. TG-161022F	Dia 16mm X 22 Ft Length	Yellow
P/N. TG-161024F	Dia 16mm X 24 Ft Length	Blue



yusano as general supplier support for items below:

****Safety Equipments / HSE (Health Safety Enviroment):Coverall/ Hazmat, Googles, Helm Faceshield, Faceshield Plastic, N95 Mask, KN95 Mask, 3Ply Mask Surgical (Earloop, HEadloop, Tie On),Gloves Surgical Non Surgical: Latex, Nitrile, Vynil, Boot Shoes, Cover Shoes, Hand Sanitizer (Gel, Liquid), Alcohol 70%, Disinfectant Spray,Disinfectant Liquid, Fogging Machine Disinfectant, Safety Helmet, Safety Shoes, Safety Body Harness, Safety Lanyard, Respirator Mask, Eyewash (Refill, Stand, Spray), Safety Cone, Safety Mirror, Safety Detector (Smoke, Gas),Safety Gloves : Neoprene, Cotton, Cutting gloves, etc***

PIPE PRODUCT

FITTINGS & FLANGES

STUD, BOLTS & NUTS




**Pipe All Material (A106, Stainless Steel, Galvanize, PVC, UPVC)*



**Fittings All Materials : A105, Elbow, Tee Reducer, Tee Equal, Plug,Swage Nipple, Double Nipple, Hex Nipples,etc*

**Flanges: ANSI (150, 300, 600, 1000), JIS 10K, DIN,etc*

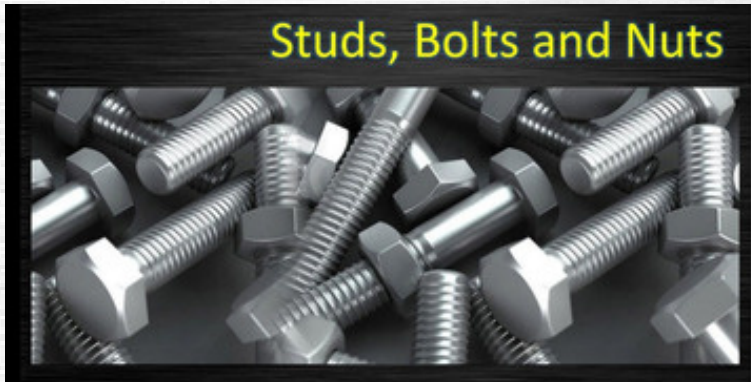

Product achieved form a strict quality control maintained throught all phases of production process and every piece of finished product is marked with the relevant material grade symbol.

Significant Products

- Plain fully thereaded rods, sutdbolts, foundation sutudbolts & stud having the diameter 3/8" to 3", and length qs required
- Plain nuts
- BBN cadmium coated bolts & nuts
- POWERCOTE Fluorocarbon coated bolts & nuts

**Stud Bolts ASTM A193 A194 B7 NUT 2H, Bolt A235, B8.8, A4-70/ SUS316, Snap Ring,As Rod, etc*

Physical Properties		
Property	Units	Values
Tensile strength	psi	2,000 to 4,000
Elongation	%	35 to 50
Water absorption	%	0.03
Service temperature	°C	260
Continuous	°C	285
Intermittent	v/mil	1,200 to 2,000
Dielectric Strength		Good
Chemical Resistance		Excellent
Adhesion		0.02 to 0.10
Coefficient of friction		

Corrosion Resistance			
Chemical	Concentration %	Hours	Effect
Water			
Deionized – Boiling	100	1000	none
Salt (immersed)	30	4000	none
Salt (spray)	5	720	none
Tap - 120°C @10.000 psi	100	24	none
Other Fluids			
Skydrol (hydraulic fluid)	100	1500	none
JP-4 (jet fuel)	100	1500	none
Break fluid (auto)	100	1500	none
H ₂ O + gas at 120°C at 2000 psi	79% CH ₄ , 6% CO ₂ , 15% H ₂ S	24	none



POWERCOTE Coatings differ from traditional fluoropolymer coatings in one very important aspect - they are composite materials. Lubricants with the lowest known coefficient of friction combined in a matrix with the newest high temperature organic polymers.



ELECTRICAL

TOOLS



**Electrical (MCB, Cables all types, VCD, cable ties, etc.)*



**Tools (Wrenches, Automotive Tools, Ratches, Socket & accessories, Insulated Tools, Measuring Tools, Plumbing Tools, Cable Cutting, Stripping and crimping tools, Pliers, Tin Snip and bolt cutters, Other Workshop Tools, Screwdrivers, Hammer, punches and chisels, Pullers, Sets of Tools, Workshop Equipments, Pneumatic Tools & Accessories, etc.)*





CM32 DIESEL ENGINE GENERATOR SET



Engine Specifications

Engine Type.....	4-stroke engine
Cylinder configuration.....	Vee - 12, 16
Fuel type.....	LFO, CRO and HFO up to 700 cSt
Bore.....	320 mm (12.6 in)
Stroke.....	420 mm (WBII 460 mm)
Cylinder displacement.....	33.8 L (WBII 37.0)
Cylinder output.....	500 kW(644 bhp)
Mean piston speed.....	10.1 m/s (WBII 11.0)
Mean effective pressure.....	23.7 bar (WBII 21.6)
Aspiration.....	Turbocharged and after-cooled
Engine rating.....	6,000-8,000kW
Generator set rating.....	5,820-7,760 kWe

Features

Designed for Reliable Operation

- ▶ Intensive cooling of key components including exhaust valve seats, injector cooling integrated into lube oil system and high-efficiency turbocharger
- ▶ Capable of operation up to 700 cSt/50° C fuel quality according to CIMAC H55/K55

Minimized Mechanical Wear

- ▶ Modular design
- ▶ State of the art material ensures long life of components

Overall Economy

- ▶ High availability and long life
- ▶ Low fuel and oil consumption
- ▶ Low maintenance requirements

Highest Quality Engine Parts

- ▶ Semi-dry wear resistant liners with calibration inserts
- ▶ Pistons with forged steel crown and aluminum skirt
- ▶ Inlet/Outlet valves with armored seats
- ▶ High efficiency turbo charger

One-Piece Dry Engine Block

- ▶ High strenght nodular cast iron with under slung crankshaft and free from cooling water

Ease of Maintenance & Reliability

- ▶ Easily removable cylinder heads, quick removable fluid connections
- ▶ Split connecting rods to allow piston removal without disturbing the big end bearing
- ▶ High reliability, modular design and integral construction reduce the number of components by 40% over conventional designs

Total Power Solutions

- ▶ Caterpillar® can develop, finance, design, build, test, maintain and operate medium speed reciprocating engine power plants and at the customer's option provide:
 - Power generation equipment
 - Engineered systems
 - Turnkey power plants
 - Contract power
 - Combined heat and power systems
 - Construction and installation services
 - Operation and maintenance services

Worldwide Product Support

- ▶ With nearly 200 Cat dealers & 1500 facilities worldwide serving in excess of 200 countries, you're never far from the Caterpillar support you need.
- ▶ Customer Support Agreements offer back-to-back services including scheduled inspections, preventative maintenance and overhauls to full operations and maintenance.

Genset : Perkins, Highlander, Firman, Honda, Stamford, etc.





GATE VALVE

GATE VALVE APPLICATION

Gate valve are general service valves that can be made in a board spectrum of size using a variety of materials. Gate valves are primarily used to turn on or shut the flow as opposed to reguating flow and are characterized by a traveling wedge, wich is moved with the operation of the stem nut. The wedge travels perpendicular to the direction of the flow.

MANUFACTURING STANDARDS

General Design	API 600 / API 6D / API 603
Face To Face	ASME/ANSI B16.10
Flange End	ASME/ANSI B16.5 & B16.47
Butt Weld End	ASME/ANSI B16.25
Pressure Rating	ASME/ANSI B16.34
Fire Safe Design	API 6FA
Inspection & Test	API 598 / API 6D
Features	Bolted Bonnet, Outside Screw & Yoke, Rising Stem, Flexible Wedge



GLOBE VALVE

GLOBE VALVE APPLICATION

Globe valves are primarily used as control valves where throttling or both throttling and shut-off are required. Globe valves can also be used for on-off services; because of the design, pressure drop becomes in-herent. This generally confined to on-off applications where the valve is normally closed and pressure drop is not important when the valve is open.

MANUFACTURING STANDARDS

General Design	BS 1873 / API 600 / API 603
Face To Face	ASME/ANSI B16.10
Flange End	ASME/ANSI B16.5 & B16.47
Butt Weld End	ASME/ANSI B16.25
Fire Safe Design	API 6FA
Pressure Rating	ASME/ANSI B16.34
Inspection & Test	API 598 / API 6D
Features	Bolted Bonnet, Outside Screw & Yoke, Rising Stem



**Other valve type, features, design, and valve material composition are available.*



CHECK VALVE

CHECK VALVE APPLICATION

Sometimes referred to as non-return-valve, check valves prevent back-flow, constantly keeping flow in one direction. Check valves are designed to close quickly and automatically with positive shut off in either horizontal or vertical (flow up) pipe runs. Inherently, swing check valves have a low pressure drop and are best suitable for velocity applications.

MANUFACTURING STANDARDS

General Design	BS1868 / API 6D / API 600 / API 603
Face To Face	ASME/ANSI B16.10
Flange End	ASME/ANSI B16.5 & B16.47
Butt Weld End	ASME/ANSI B16.25
Fire Safe Design	API 6FA
Pressure Rating	ASME/ANSI B16.34
Inspection & Test	API 598 / API 6D
Features	Bolted Cap, Swing Disc



DUAL PLATE WAFER CHECK VALVE

DUAL PLATE WAFER CHECK VALVE APPLICATION


Dual plate wafer check valve is typically installed in support of automatic shutdown valves and safety devices. Its purpose is to prevent and protect devices against the consequences of unintended reverse flow. It is immediately responsive and fast acting in its closure, thereby maximizing protection to prevent or minimize the adverse effect of any backflow.

MANUFACTURING STANDARDS

General Design	API 6D / API 594
Fire Safe Design	API 607 / API 6FA
Pressure Rating	ASME / ANSI B16.34
Face to Face	ASME / ANSI B 16.10
Flange dimensions	ASME / ANSI B 16.5, ANSI 16.47A & ANSI B16.47B
Test & Inspection	API 6D / API 598




**Other valve type, features, design, and valve material composition are available.*

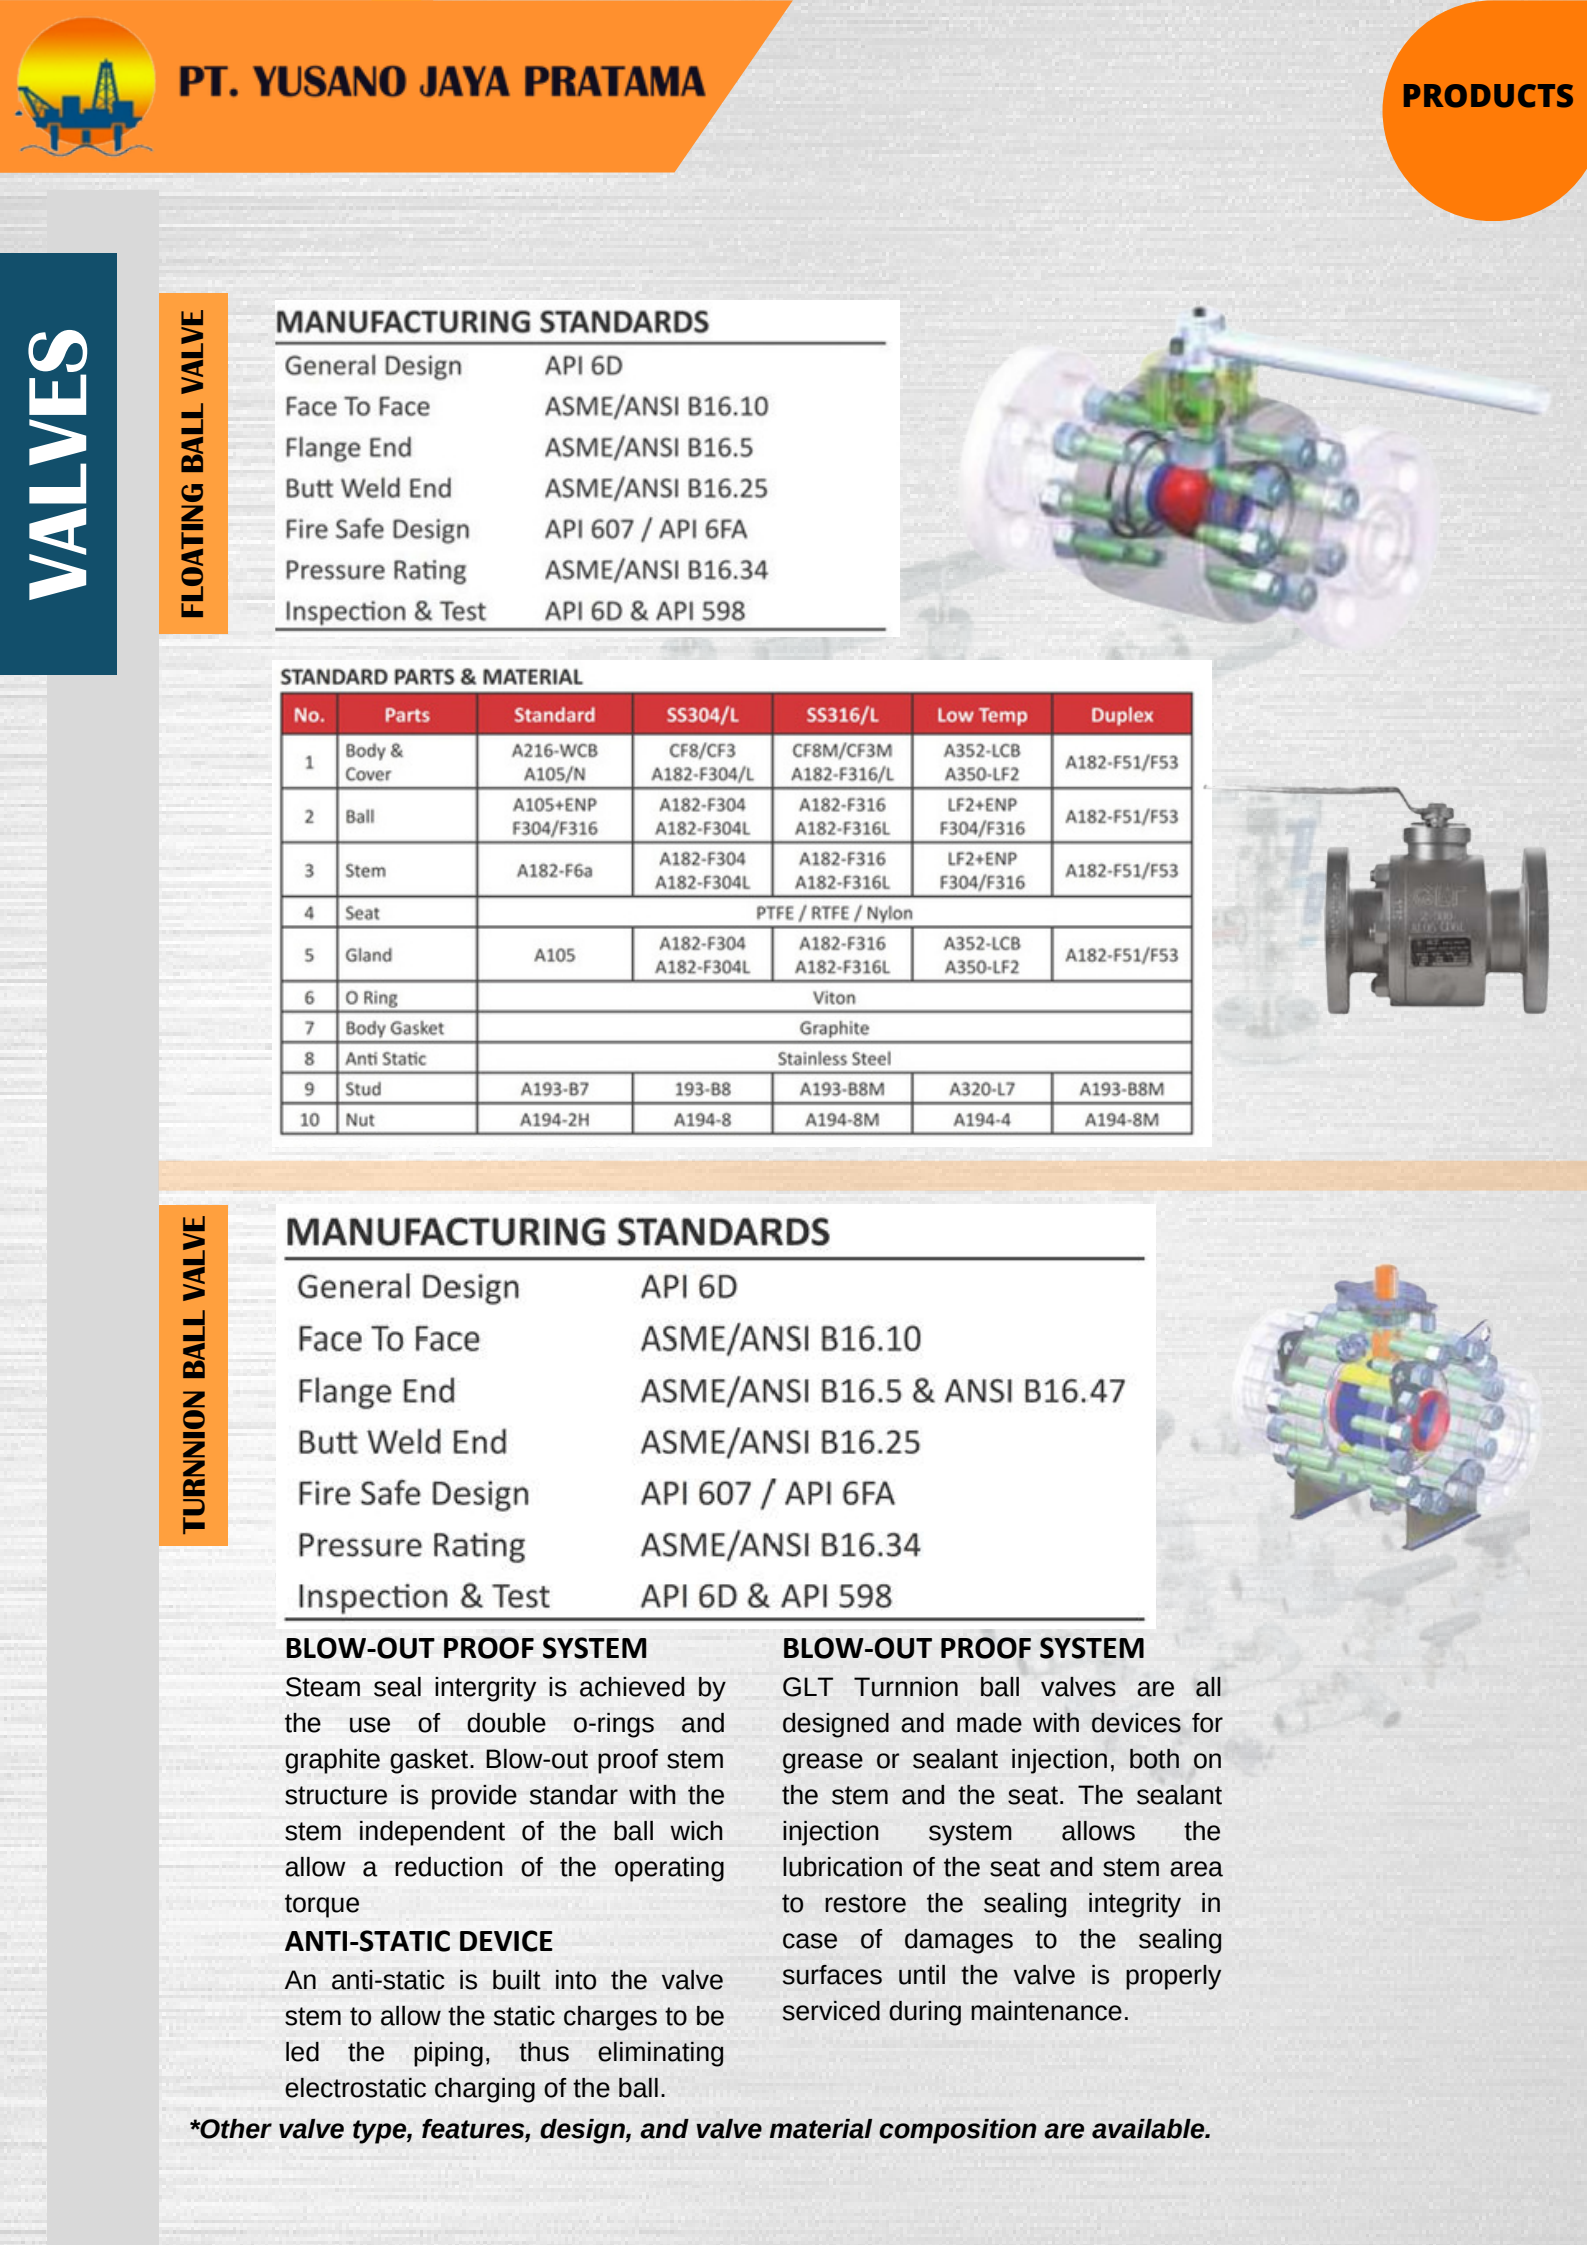

FLOATING BALL VALVE

MANUFACTURING STANDARDS	
General Design	API 6D
Face To Face	ASME/ANSI B16.10
Flange End	ASME/ANSI B16.5
Butt Weld End	ASME/ANSI B16.25
Fire Safe Design	API 607 / API 6FA
Pressure Rating	ASME/ANSI B16.34
Inspection & Test	API 6D & API 598

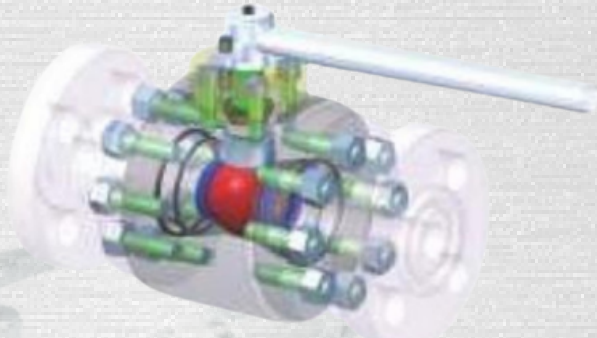


STANDARD PARTS & MATERIAL						
No.	Parts	Standard	SS304/L	SS316/L	Low Temp	Duplex
1	Body & Cover	A216-WCB A105/N	CF8/CF3 A182-F304/L	CF8M/CF3M A182-F316/L	A352-LCB A350-LF2	A182-F51/F53
2	Ball	A105+ENP F304/F316	A182-F304 A182-F304L	A182-F316 A182-F316L	LF2+ENP F304/F316	A182-F51/F53
3	Stem	A182-F6a	A182-F304 A182-F304L	A182-F316 A182-F316L	LF2+ENP F304/F316	A182-F51/F53
4	Seat	PTFE / RTFE / Nylon				
5	Gland	A105	A182-F304 A182-F304L	A182-F316 A182-F316L	A352-LCB A350-LF2	A182-F51/F53
6	O Ring	Viton				
7	Body Gasket	Graphite				
8	Anti Static	Stainless Steel				
9	Stud	A193-B7	193-B8	A193-B8M	A320-L7	A193-B8M
10	Nut	A194-2H	A194-8	A194-8M	A194-4	A194-8M



TURNION BALL VALVE

MANUFACTURING STANDARDS	
General Design	API 6D
Face To Face	ASME/ANSI B16.10
Flange End	ASME/ANSI B16.5 & ANSI B16.47
Butt Weld End	ASME/ANSI B16.25
Fire Safe Design	API 607 / API 6FA
Pressure Rating	ASME/ANSI B16.34
Inspection & Test	API 6D & API 598



BLOW-OUT PROOF SYSTEM

Steam seal integrity is achieved by the use of double o-rings and graphite gasket. Blow-out proof stem structure is provide standar with the stem independent of the ball wich allow a reduction of the operating torque


ANTI-STATIC DEVICE

An anti-static is built into the valve stem to allow the static charges to be led the piping, thus eliminating electrostatic charging of the ball.

BLOW-OUT PROOF SYSTEM

GLT Turnnion ball valves are all designed and made with devices for grease or sealant injection, both on the stem and the seat. The sealant injection system allows the lubrication of the seat and stem area to restore the sealing integrity in case of damages to the sealing surfaces until the valve is properly serviced during maintenance.

**Other valve type, features, design, and valve material composition are available.*

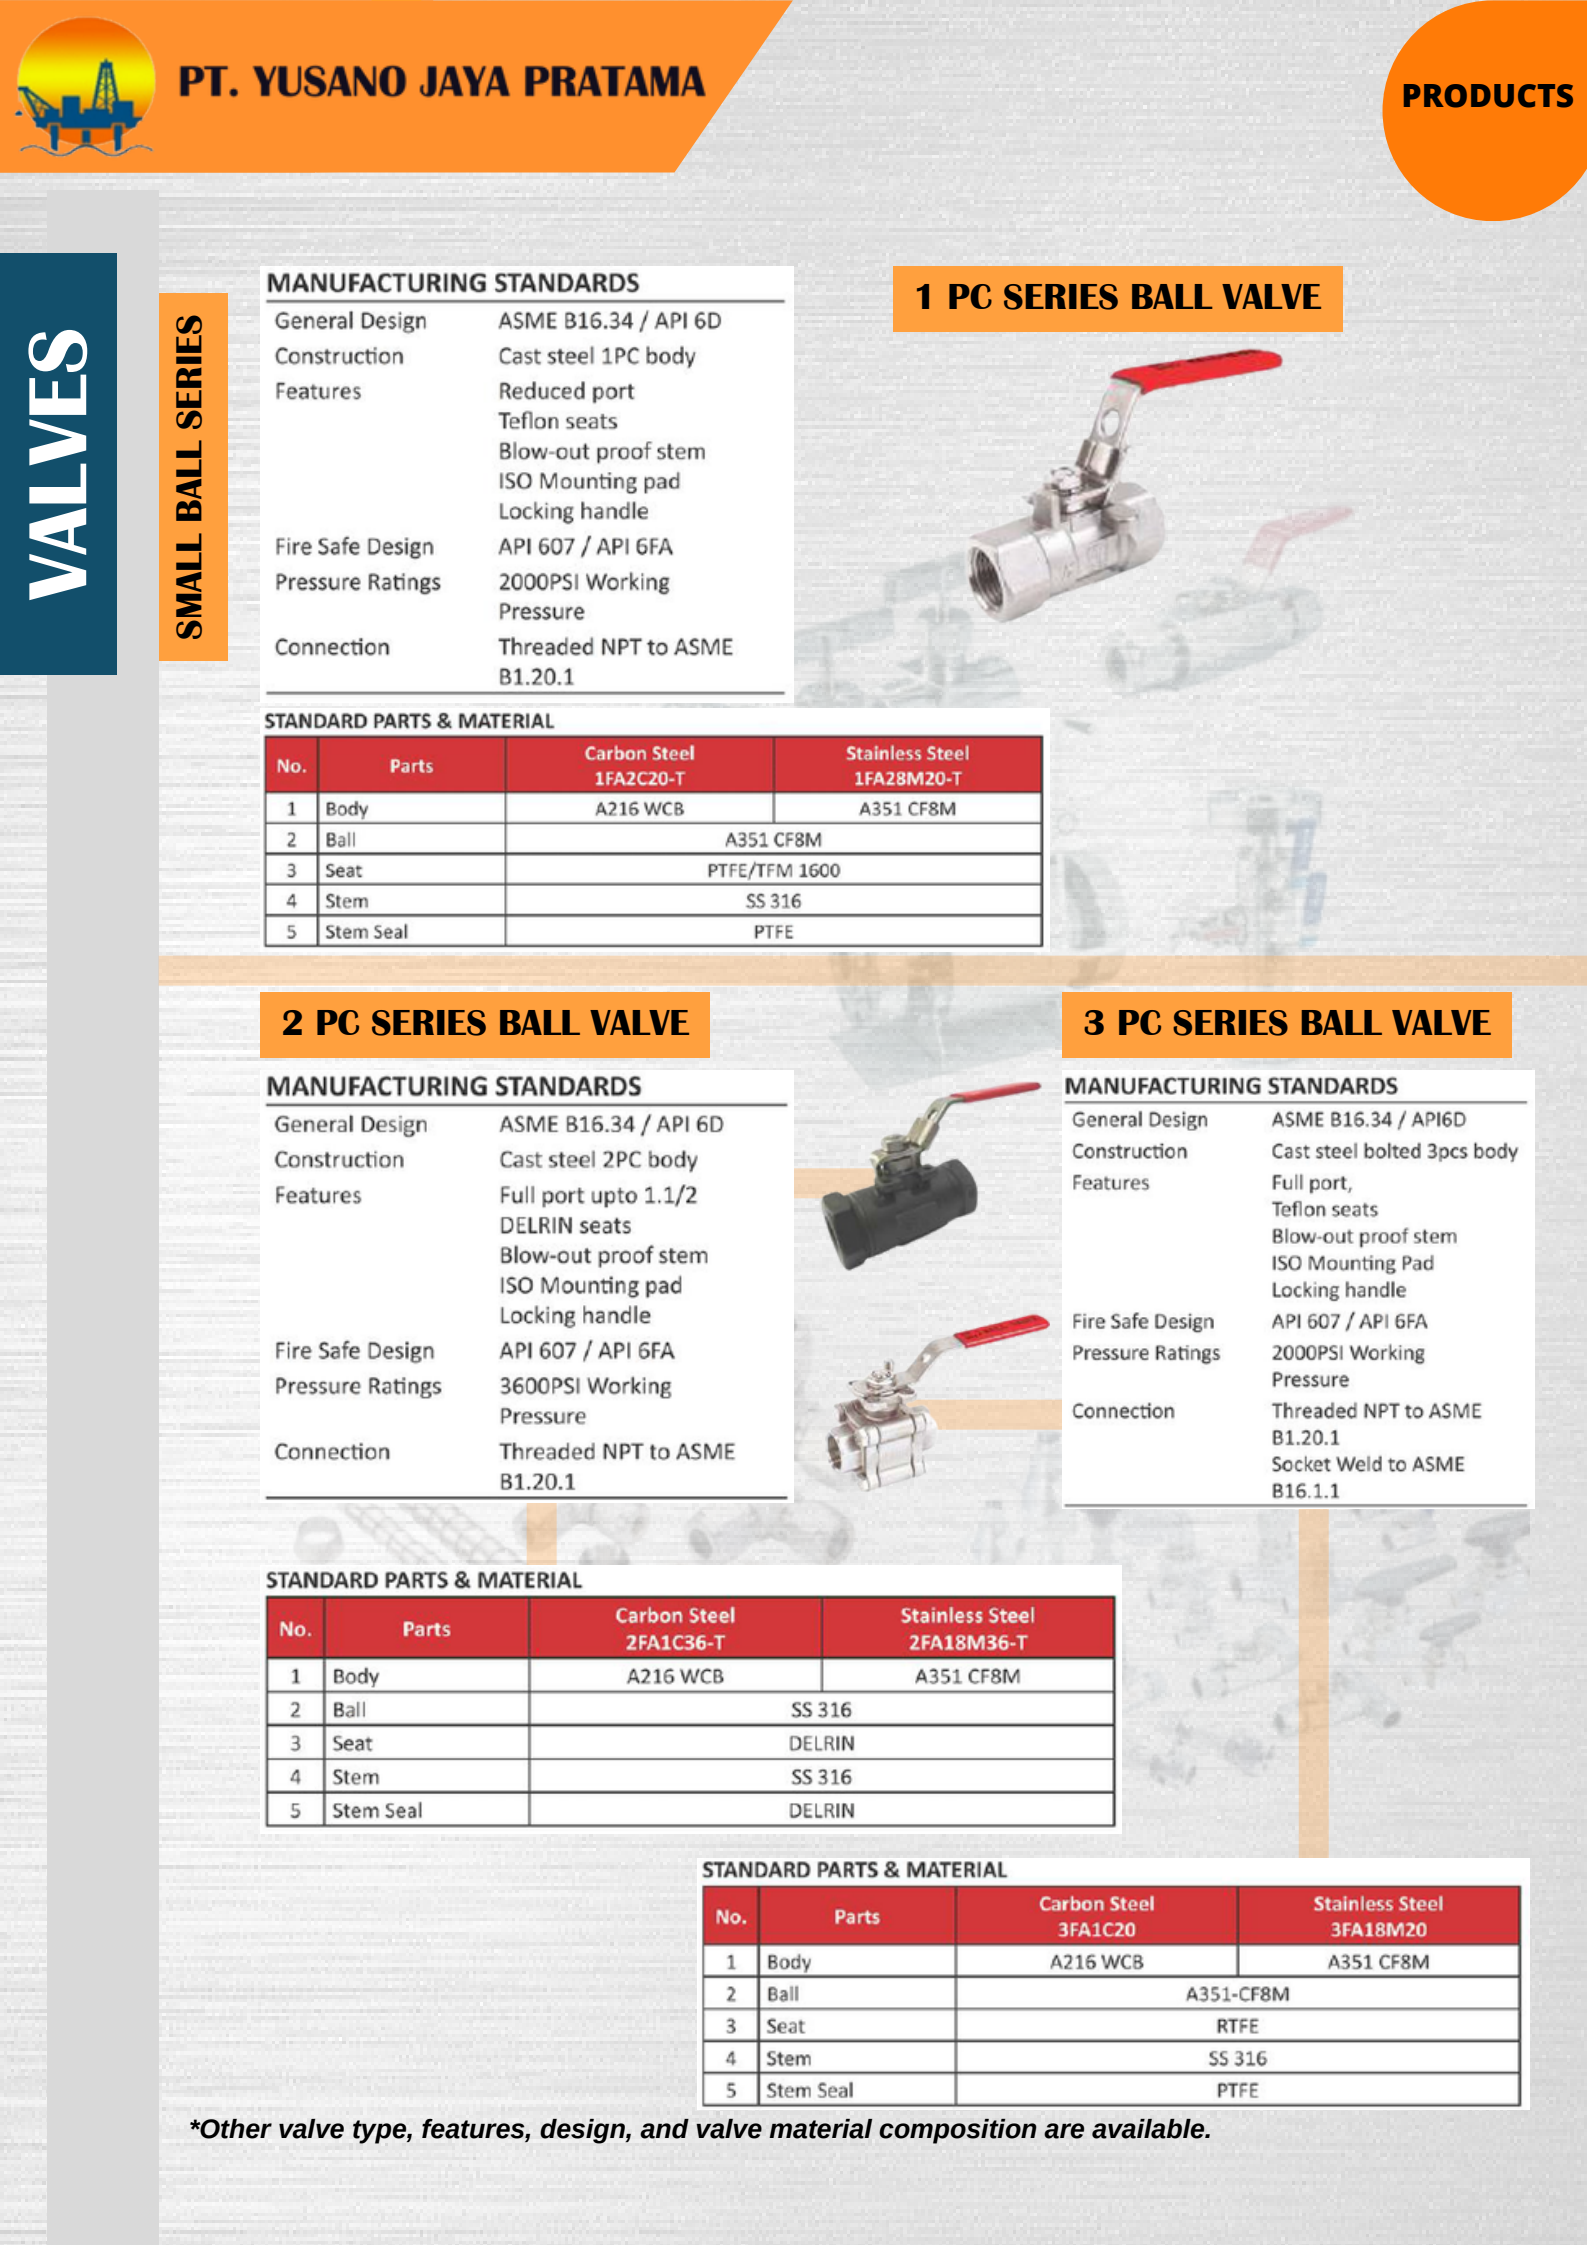

SMALL BALL SERIES

MANUFACTURING STANDARDS

General Design	ASME B16.34 / API 6D
Construction	Cast steel 1PC body
Features	Reduced port Teflon seats Blow-out proof stem ISO Mounting pad Locking handle
Fire Safe Design	API 607 / API 6FA
Pressure Ratings	2000PSI Working Pressure
Connection	Threaded NPT to ASME B1.20.1

1 PC SERIES BALL VALVE



STANDARD PARTS & MATERIAL

No.	Parts	Carbon Steel 1FA2C20-T	Stainless Steel 1FA28M20-T
1	Body	A216 WCB	A351 CF8M
2	Ball	A351 CF8M	
3	Seat	PTFE/TFM 1600	
4	Stem	SS 316	
5	Stem Seal	PTFE	

2 PC SERIES BALL VALVE

MANUFACTURING STANDARDS

General Design	ASME B16.34 / API 6D
Construction	Cast steel 2PC body
Features	Full port upto 1.1/2 DELRIN seats Blow-out proof stem ISO Mounting pad Locking handle
Fire Safe Design	API 607 / API 6FA
Pressure Ratings	3600PSI Working Pressure
Connection	Threaded NPT to ASME B1.20.1



3 PC SERIES BALL VALVE

MANUFACTURING STANDARDS

General Design	ASME B16.34 / API6D
Construction	Cast steel bolted 3pcs body
Features	Full port, Teflon seats Blow-out proof stem ISO Mounting Pad Locking handle
Fire Safe Design	API 607 / API 6FA
Pressure Ratings	2000PSI Working Pressure
Connection	Threaded NPT to ASME B1.20.1 Socket Weld to ASME B16.1.1

STANDARD PARTS & MATERIAL

No.	Parts	Carbon Steel 2FA1C36-T	Stainless Steel 2FA18M36-T
1	Body	A216 WCB	A351 CF8M
2	Ball	SS 316	
3	Seat	DELRIN	
4	Stem	SS 316	
5	Stem Seal	DELRIN	

STANDARD PARTS & MATERIAL

No.	Parts	Carbon Steel 3FA1C20	Stainless Steel 3FA18M20
1	Body	A216 WCB	A351 CF8M
2	Ball	A351-CF8M	
3	Seat	RTFE	
4	Stem	SS 316	
5	Stem Seal	PTFE	

*Other valve type, features, design, and valve material composition are available.



AKTA PENDIRIAN



PENJABAT PEMBUAT AKTA TANAH
ANTHONY DJOENARDI S.H.

KANTOR JALAN GAJAH MADA No. 12G
TELP. 370122
JAKARTA PUSAT

AKTA TGL: 2 November 1981
NOMOR 17

PERSEORAN TERBATAS
"P.T. YUSANO JAYA PRATAMA"

PERSEORAN TERBATAS
"P.T. YUSANO JAYA PRATAMA"
Nomor : 17.-

Pada hari ini, Sabtu, tanggal tujuh Nopember seribu sembilanratus delapan puluh satu.

Menghadap kepada saya, ANTHONY DJOENARDI Sarjana Hukum, Notaris di Jakarta, dengan dihadiri oleh saksi-saksi yang saya, Notaris kenal dan akan disebut dalam akhir akte ini:

I. Nyonya ANNEKE SUMADJI TOGAS, partikular, bertempat tinggal di Jakarta, Jalan Cilosari Nomor 14, Rukun Tetangga 007/04 Kelurahan Cikini :-

menurut keterangannya dalam hal ini bertindak:

a. untuk diri sendiri ;

b. selaku Ibu yang menjalankan kekuasaan orang tua dari dan sebagai desikan untuk dan atas nama anak-anaknya yang masih dibawah umur, yaitu:

1. tuan BASTO SUMANDI ;

2. tuan NOLBY SUMANDI ;

3. nona JULIET SUMANDI ;

kesemuanya bertempat tinggal di Jakarta, Jalan Cilosari Nomor 14, Rukun Tetangga 007/04 Kelurahan Cikini.

II. Tuan NICO TOGAS, partikular, bertempat tinggal di Menado, Jalan R.E. Martadinata Nomor 39, untuk sementara berada di Jakarta.

Saya penghadap saya, Notaris kenal.

Saya penghadap untuk diri sendiri dan/atau dalam ke-

AKTA PERUBAHAN



NOTARIS
ROBBY LEO SELAMAT, SH., MKn

SK Menteri Hukum dan Hak Asasi Manusia Republik Indonesia
No. AHU 0470.AH.02.01. Tahun 2013 Tgl. 10 September 2013

Akta

Tanggal : 15 - 09 - 2022
Nyeri : 06

Salinan

Pernyataan Kesepakatan Para Pemegang Saham

"PT. YUSANO JAYA PRATAMA"

- Tuan NOLBY SUPAKTO, S

Kantor :
Komplek Gedung Kencana 5 B.01, Sudirman Barat, Cikleg
Kota Tangerang Tlg. / Fax. 021-82271244
Email : kantornotaris@gmail.com

KANTOR NOTARIS
ROBBY LEO SELAMAT, SH., MKn

KETENTUAN PENUTUP

Pasal 20

Maka dengan demikian Susunan Direktur dan Komisaris adalah sebagai berikut :

- Direktur : Tuan NOLBY SUPAKTO, S tersebut.

- Komisaris : Nyonya OTA

BERKAWAT, lahir di Karawang, pada tanggal tiga belas Juni seribu sembilan ratus delapan puluh satu (13-06-1981), Warga Negara Indonesia, Miraswasta, bertempat tinggal di Jl. Kemang Utara G, Rukun Tetangga 001, Kelurahan Bangka, Kecamatan Mangrove, Kota Administrasi Jakarta Selatan, Provinsi DKI Jakarta, pemegang Kartu Tanda Penduduk Nomor

KEMENTERIAN HUKUM DAN HAK ASASI MANUSIA
REPUBLIK INDONESIA
DIREKTORAT JENDERAL ADMINISTRASI HUKUM UMUM
Jl. K.R. Rasuna Said Km. 6-7 Kuningan, Jakarta Selatan
Telp. (021) 5202387 - Hurling

Nomor : AHU-AH.01.09-0015835
Lampiran :
Perihal : Penyerahan Pembuktian Pendaftaran Data Perseroan PT YUSANO JAYA PRATAMA

Kepada Yth.
Bapak ROBBY LEO SELAMAT, SH., MKn
Komplek Gedung Kencana 5, B01
Kota Tangerang

Sesuai dengan data dalam format isian Perubahan yang diinput di dalam sistem Administrasi Badan Hukum berdasarkan Akta Notaris Nomor 06 Tanggal 15 September 2022 yang dibuat oleh Notaris ROBBY LEO SELAMAT, SH., MKn, berkedudukan di KOTA TANGERANG, mengenai perubahan Direksi dan Komisaris, PT YUSANO JAYA PRATAMA, berkedudukan di JAKARTA PUSAT, telah diterima dan dicatat di dalam Sistem Administrasi Badan Hukum.

Diberikan di Jakarta, Tanggal 26 September 2022.

a.n. MENTERI HUKUM DAN HAK ASASI MANUSIA
REPUBLIK INDONESIA
DIREKTUR JENDERAL ADMINISTRASI HUKUM UMUM

Cekris Rahadina Munther, S.H., LL.M.
13090933 130403 3 001

DI CETAK PADA TANGGAL 26 September 2022
DAFTAR PERUBAHAN NOMOR AHU-010006.AH.01.11.TANGGAL 26 September 2022
Pembertahanan ini hanya merupakan keterangan, bukan menjadi Tanda Ukur Negara



PEMERINTAH REPUBLIK INDONESIA

PERIZINAN BERUSAHA BERBASIS RISIKO
NOMOR INDUK BERUSAHA: 9120100351425

Berdasarkan Undang-Undang Nomor 11 Tahun 2020 tentang Cipta Kerja, Pemerintah Republik Indonesia menerbitkan Nomor Induk Berusaha (NIB) kepada:

- | | |
|--|---|
| 1. Nama Pelaku Usaha | : PT YUSANO JAYA PRATAMA |
| 2. Alamat Kantor | : Jl. CLOSARI NOMOR 14, Desa/Kelurahan Cikiri, Kec. Menteng, Kota
Adm. Jakarta Pusat, Provinsi DKI Jakarta,
Kode Pos: 10330 |
| No. Telepon | : 02131922051 |
| Email | : phyusano57@gmail.com |
| 3. Status Penanaman Modal | : PMDN |
| 4. Kode Klasifikasi Baku Lapangan Usaha Indonesia (KBLU) | : Uhat Laminan |

NIB ini berlaku di seluruh wilayah Republik Indonesia selama menjalankan kegiatan usaha dan berlaku sebagai Angka Pengenal Impor (API-U), hak akses kepastian, pendaftaran kepesertaan jaminan sosial kesehatan dan jaminan sosial ketenagakerjaan, serta bukti pemenuhan laporan pertama Wajib Lapor Ketenagakerjaan di Perusahaan (WLKP).

Pelaku Usaha dengan NIS tersebut di atas dapat melaksanakan kegiatan berusaha sebagaimana terlampir dengan tetap memperhatikan ketentuan peraturan perundang-undangan.

Diterbitkan di Jakarta, tanggal: 12 Maret 2019
Perubahan ke-17, tanggal: 30 Maret 2022

Menteri Investasi/
Kepala Badan Koordinasi Penanaman Modal



Ditandatangani secara elektronik.

Dicetak tanggal: 30 Maret 2022

1. Dokumen ini diterbitkan sistem OSS berdasarkan data dari Pakai Usaha, tersimpan dalam sistem OSS, yang menjadi tanggung jawab Pakai Usaha.
2. Dalam hal terjadi kekeliruan isi dokumen ini akan dilakukan perbaikan sebagaimana mestinya.
3. Dokumen ini tidak didaftarkan secara elektronik menggunakan sertifikat elektronik yang diterbitkan oleh BSN-BSSN.
4. Data lengkap Perizinan Usaha dapat diperoleh melalui sistem OSS menggunakan hak akses.



PEMERINTAH REPUBLIK INDONESIA
PERIZINAN BERUSAHA BERBASIS RISIKO
LAMPIRAN
NOMOR INDUK BERUSAHA: 9120100351425

Lampiran berikut ini memuat daftar bidang usaha untuk:

No	Kode KBLU	Judul KBLU	Lokasi Usaha	Klasifikasi Risiko	Perizinan Berusaha	
					Jenis	Legalisasi
1	218120	Industri Penjualan Tenaga Listrik Dari Gas	Jl. CILOSARI NOMOR 14, Desa/Kelurahan Cikini, Kec. Menteng, Kota Adm. Jakarta Pusat, Provinsi DKI Jakarta Kode Pos: 10330	Rendah	NIB	Untuk persiapan, operasional, dan/atau komersial kegiatan usaha
2	33121	Reparasi Mesin Untuk Kebutuhan Umum	Jl. CILOSARI NOMOR 14, Desa/Kelurahan Cikini, Kec. Menteng, Kota Adm. Jakarta Pusat, Provinsi DKI Jakarta Kode Pos: 10330	Rendah	NIB	Untuk persiapan, operasional, dan/atau komersial kegiatan usaha
3	40504	Pengdagangan Besar Alat Transportasi Udara, Stukor Cadangan Dan Perbaikan/nya	Jl. CILOSARI NOMOR 14, Desa/Kelurahan Cikini, Kec. Menteng, Kota Adm. Jakarta Pusat, Provinsi DKI Jakarta Kode Pos: 10330	Rendah	NIB	Untuk persiapan, operasional, dan/atau komersial kegiatan usaha
4	40900	Pengdagangan Besar Berbagai Macam Barang	Jl. Cilosari No. 14, Desa/Kelurahan Cikini, Kec. Menteng, Kota Adm. Jakarta Pusat, Provinsi DKI Jakarta Kode Pos: 10330	Rendah	NIB	Untuk persiapan, operasional, dan/atau komersial kegiatan usaha
5	32004	Industri Peralatan Untuk Peleindug Keselamatan	Jl. CILOSARI NOMOR 14, Desa/Kelurahan Cikini, Kec. Menteng, Kota Adm. Jakarta Pusat, Provinsi DKI Jakarta Kode Pos: 10330	Menengah Rendah	NIB dan Sertifikat Standar	Untuk persiapan, operasional, dan/atau komersial kegiatan usaha
6	7313	Aktivitas Penyewaan Dan Sewa Guna Usaha Tanpa Hak Oper Alat Transportasi Udara	Jl. Cilosari No. 14, Desa/Kelurahan Cikini, Kec. Menteng, Kota Adm. Jakarta Pusat, Provinsi DKI Jakarta Kode Pos: 10330	Menengah Tinggi	NIB Sertifikat Standar belum diverifikasi	Untuk persiapan kegiatan usaha Untuk persiapan kegiatan usaha Untuk operasional dan/atau komersial kegiatan usaha
7	40442	Pengdagangan Besar Obat Tradisional Untuk Manusia	Jl. Cilosari No. 14, Desa/Kelurahan Cikini, Kec. Menteng, Kota Adm. Jakarta Pusat, Provinsi DKI Jakarta Kode Pos: 10330	Menengah Tinggi	Sertifikat Standar belum diverifikasi	Untuk persiapan kegiatan usaha Untuk persiapan kegiatan usaha Untuk operasional dan/atau komersial kegiatan usaha
8	40443	Pengdagangan Besar Kosmetik	Jl. Cilosari No. 14, Desa/Kelurahan Cikini, Kec. Menteng, Kota Adm.	Menengah Tinggi	Sertifikat Standar telah diverifikasi	Untuk persiapan kegiatan usaha

1. Dokumen IV diterbitkan sistem OSS berdasarkan data dari Pelaku Usaha, kemudian dalam sistem OSS, yang menjadi tanggung jawab Pelaku Usaha.
2. Dalam hal terjadi kelainan di dokumen IV akan dilakukan perbaikan sebagaimana mestinya.
3. Dokumen IV telah diterbitkan secara elektronik menggunakan sertifikat elektronik yang diterbitkan oleh BSN-BSSN.
4. Data lengkap Perusahaan Bersih dapat diperoleh melalui sistem OSS menggunakan hak akses.



No	Unitas Manusia	Jakarta Pusat, Provinsi DKI Jakarta Kode Pos: 10330	Jenis Kegiatan	Kategori Kegiatan	Kategori Kegiatan	Kategori Kegiatan
						Unitas persiapan kegiatan usaha
						Unitas operasional dan/atau komersial kegiatan usaha
9	091010	Aktivitas Penunjang Pembangunan Minyak Bumi Gas Alam	JL. CILOSAN NO.14, Desa Kelurahin Cikiri, Kec. Menteng, Kota Adm. Jakarta Pusat, Provinsi DKI Jakarta Kode Pos: 10330	tinggi	NIB	Unitas persiapan kegiatan usaha
						Unitas operasional dan/atau komersial kegiatan usaha
10	106467	Pembangunan Besar Bangunan Fungsional Untuk Manusia Dan Hewan	J. Cilosan No.14, Desa Kelurahin Cikiri, Kec. Menteng, Kota Adm. Jakarta Pusat, Provinsi DKI Jakarta Kode Pos: 10330	tinggi	NIB	Unitas persiapan kegiatan usaha
						Unitas operasional dan/atau komersial kegiatan usaha
11	106091	Pertambangan Besar Alat Laboratorium Alat Fungsional Alat Kibodkutan Untuk Manusia	J. Cilosan No.14, Desa Kelurahin Cikiri, Kec. Menteng, Kota Adm. Jakarta Pusat, Provinsi DKI Jakarta Kode Pos: 10330	tinggi	NIB	Unitas persiapan kegiatan usaha
						Unitas operasional dan/atau komersial kegiatan usaha
12	091010	Pembangunan Minyak Bumi	JL. CILOSAN NO.14, Desa Kelurahin Cikiri, Kec. Menteng, Kota Adm. Jakarta Pusat, Provinsi DKI Jakarta Kode Pos: 10330	tinggi	izin	Unitas persiapan kegiatan usaha
						Unitas operasional dan/atau komersial kegiatan usaha
13	106461	Pertambangan Besar Alat Fungsional Untuk Manusia	J. CILOSAN NO.14, Desa Kelurahin Cikiri, Kec. Menteng, Kota Adm. Jakarta Pusat, Provinsi DKI Jakarta Kode Pos: 10330	tinggi	NIB	Unitas persiapan kegiatan usaha
						Unitas operasional dan/atau komersial kegiatan usaha

1. Dengan ketentuan bahwa NIB tersebut hanya berlaku untuk Kode dan Judul KBLI yang tercantum dalam lampiran ini.
2. Setiap pelaku usaha memenuhi persyaratan dan/atau kewajiban sesuai Norma, Standar, Prosedur, dan Kriteria (NSPK) Kementerian/Lembaga (K/L).
3. Verifikasi dan/atau pengawasan pemenuhan persyaratan dan/atau kewajiban Pelaku Usaha dilakukan oleh Kementerian/Lembaga/Pemerintah Daerah terkait.
4. Lampiran ini merupakan bagian tidak terpisahkan dari dokumen NIB tersebut.

1. Dokumen IV diterbitkan sistem OSS berdasarkan data dari Pelaku Usaha, tersimpan dalam sistem OSS, yang menjadi tanggung jawab Pelaku Usaha.
2. Dalam hal terjadi kekeliruan isi dokumen IV akan dilakukan perbaikan sebagaimana mestinya.
3. Dokumen IV telah diintegrasikan secara elektronik menggunakan sertifikat elektronik yang diterbitkan oleh BSN-BSSN.
4. Data lengkap Perizinan Berusaha dapat diunduh melalui sistem OSS menggunakan hak akses.







CERTIFICATE

GARUDA SERTIFIKASI INDONESIA

hereby certify that

PT YUSANO JAYA PRATAMA

Jl. Cilosari No 14, Kel Cikini, Kec Menteng, Kota Adm. Jakarta Pusat,
Prov. DKI Jakarta

Has been audited by PT GARUDA SERTIFIKASI INDONESIA
and has implemented Quality Management System

SNI ISO 9001 : 2015

Scope of Registration

- Provision of supplier, pump & compressor and artificial lift system for oil and gas activities
- Provision Engineering activities related production, drilling, mining & exploration for oil and gas activities

EA Code	: 29, 34
Certificate No.	: G.01 - ID0461 - IX - 2021
Original Date	: 24 September 2021
Issue Date Certificate	: 24 September 2021
Planning to be 1 st Surveillance	: 24 August 2022
Planning to be 2 nd Surveillance	: 24 August 2023
Planning to be Renewal	: 24 July 2024
Expired Date Certificate	: 23 September 2024



DIRECTOR

To Verify the validity of this certificate please visit www.gserti.com or scan this barcode

PT GARUDA SERTIFIKASI INDONESIA
Jl. Pidada XI, Perum Griya Loka, Kav. 11, No. 9X, Ubung, Denpasar Utara, Bali - Indonesia
Phone: 0361-8947607, Email: info@gserti.com, Website: www.gserti.com



CERTIFICATE

GARUDA SERTIFIKASI INDONESIA

hereby certify that

PT YUSANO JAYA PRATAMA

Jl. Cilosari No 14, Kel Cikini, Kec Menteng, Kota Adm. Jakarta Pusat,
Prov. DKI Jakarta

Has been audited by PT GARUDA SERTIFIKASI INDONESIA
and has implemented Environmental Management System

SNI ISO 14001 : 2015

Scope of Registration

- Provision of supplier, pump & compressor and artificial lift system for oil and gas activities
- Provision Engineering activities related production, drilling, mining & exploration for oil and gas activities

EA Code	: 29, 34
Certificate No.	: G.02 - ID0461 - IX - 2021
Original Date	: 24 September 2021
Issue Date Certificate	: 24 September 2021
Planning to be 1 st Surveillance	: 24 August 2022
Planning to be 2 nd Surveillance	: 24 August 2023
Planning to be Renewal	: 24 July 2024
Expired Date Certificate	: 23 September 2024



DIRECTOR

To Verify the validity of this certificate please visit www.gserti.com or scan this barcode

PT GARUDA SERTIFIKASI INDONESIA
Jl. Pidada XI, Perum Griya Loka, Kav. 11, No. 9X, Ubung, Denpasar Utara, Bali - Indonesia
Phone: 0361-8947607, Email: info@gserti.com, Website: www.gserti.com



CERTIFICATE

GARUDA SERTIFIKASI INDONESIA

hereby certify that

PT YUSANO JAYA PRATAMA

Jl. Cilosari No 14, Kel Cikini, Kec Menteng, Kota Adm. Jakarta Pusat,
Prov. DKI Jakarta

Has been audited by PT GARUDA SERTIFIKASI INDONESIA
and has implemented Occupational Health & Safety Management System

SNI ISO 45001 : 2018

Scope of Registration

- Provision of supplier, pump & compressor and artificial lift system for oil and gas activities
- Provision Engineering activities related production, drilling, mining & exploration for oil and gas activities

EA Code	: 29, 34
Certificate No.	: G.06 - ID0461 - IX - 2021
Original Date	: 24 September 2021
Issue Date Certificate	: 24 September 2021
Planning to be 1 st Surveillance	: 24 August 2022
Planning to be 2 nd Surveillance	: 24 August 2023
Planning to be Renewal	: 24 July 2024
Expired Date Certificate	: 23 September 2024



DIRECTOR

To Verify the validity of this certificate please visit www.gserti.com or scan this barcode

PT GARUDA SERTIFIKASI INDONESIA
Jl. Pidada XI, Perum Griya Loka, Kav. 11, No. 9X, Ubung, Denpasar Utara, Bali - Indonesia
Phone: 0361-8947607, Email: info@gserti.com, Website: www.gserti.com



PT. YUSANO JAYA PRATAMA

GET IN TOUCH

Main Office Jakarta



0812 9795 2828 (Sonya)



sonya@yusanojayapratama.co.id



www.yusanojayapratama.co.id



**JL. Cilosari No.14 Cikini
Menteng Jakarta Pusat
DKI Jakarta 10330**

Branch Office Pekanbaru



0821 7274 3629 (Robby)



robby@yusanojayapratama.co.id



**Jl. Duyung, Villa Putri Duyung
Blok F3 - Pekanbaru (Riau)
28281**