


CIVE 557 Course Project

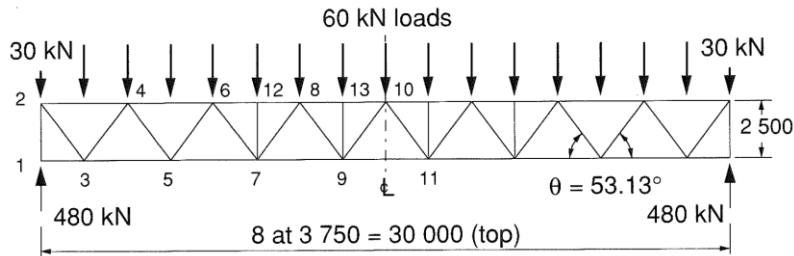

For all connections, assume the welds are strong enough to develop the yield strength of the connected branch wall at all locations around the branch. The length of the truss is long enough to require chord splice. Assume that the chord splices are to be shop welded, and that equal width and height sections are desired at the splices. The thicknesses of the chord members can be different. Assume the splice connections are strong enough to develop the full capacity of the chord members.

Select member sizes based on: (1) member forces, and (2) required strengths of the welded HSS to HSS connections (i.e. connection #1 to 13). Include design assumptions, detailed calculations and summarizing tables in a professional report.