

HOME PLOTS APPS **FIGURE** FORMAT TOOLS

Copy Figure Print Show Code

FILE


Labels and Annotations: Title, Subtitle, X-Label, Y-Label, Z-Label, Legend, Colorbar, Grid, X-Grid, Y-Grid

MATLAB Drive

```
9
10 disp('SNR (dB) NB-IoT(Mbps) LTE-M(Mbps)')
11 disp([SNR' NB_IoT' LTE_M'])
12 figure
13 % ----- Graph 1 -----
14 subplot(2,1,1)
15 plot(SNR,NB_IoT,'-o','LineWidth',2)
16 title('NB-IoT Throughput vs SNR')
17 xlabel('Signal-to-Noise Ratio (dB)')
18 ylabel('Throughput (Mbps)')
19 grid on
20 % ----- Graph 2 -----
21 subplot(2,1,2)
22 plot(SNR,LTE_M,'-s','LineWidth',2)
23 title('LTE-M Throughput vs SNR')
24 xlabel('Signal-to-Noise Ratio (dB)')
25 ylabel('Throughput (Mbps)')
```

Command Window


>>

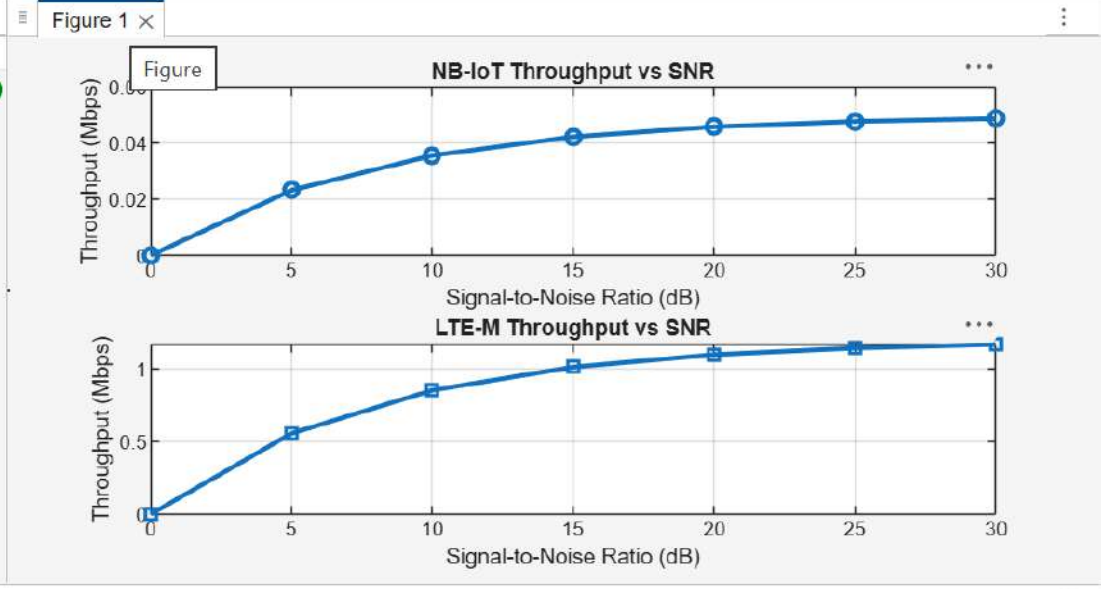

```
untitled2.m x untitled123.m x untitled12.m x untitled122.m x
/MATLAB Drive/untitled122.m
10 disp([SNR' NB_IoT' LTE_M'])
11 figure
12 % ----- Graph 1 -----
13 subplot(2,1,1)
14 plot(SNR,NB_IoT,'-o','LineWidth',2)
15 title('NB-IoT Latency vs SNR')
16 xlabel('Signal-to-Noise Ratio (dB)')
17 ylabel('Latency (ms)')
18 grid on
19 % ----- Graph 2 -----
20 subplot(2,1,2)
21 plot(SNR,LTE_M,'-s','LineWidth',2)
22 title('LTE-M Latency vs SNR')
23 xlabel('Signal-to-Noise Ratio (dB)')
24 ylabel('Latency (ms)')
25 grid on
26
```

Command Window

>>

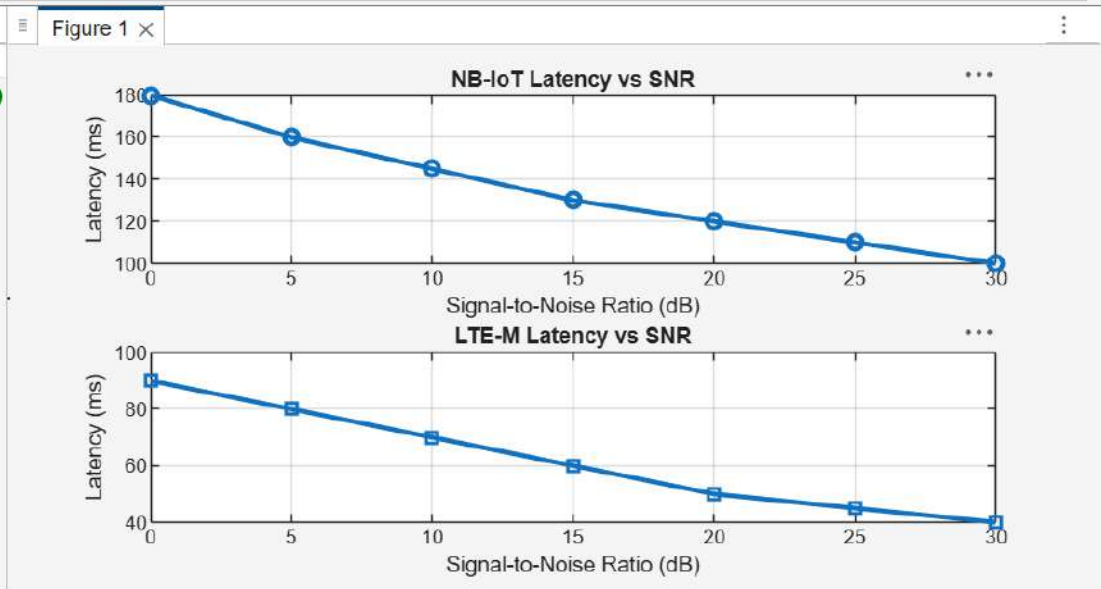

```

10 disp([SNR' NB_IoT' LTE_M'])
11 figure
12 % ----- Graph 1 -----
13 subplot(2,1,1)
14 plot(SNR,NB_IoT,'-o','LineWidth',2)
15 title('NB-IoT Packet Delivery Ratio vs SNR')
16 xlabel('Signal-to-Noise Ratio (dB)')
17 ylabel('Packet Delivery Ratio (%)')
18 grid on
19 % ----- Graph 2 -----
20
21 subplot(2,1,2)
22 plot(SNR,LTE_M,'-s','LineWidth',2)
23 title('LTE-M Packet Delivery Ratio vs SNR')
24 xlabel('Signal-to-Noise Ratio (dB)')
25 ylabel('Packet Delivery Ratio (%)')
26 grid on
    
```

