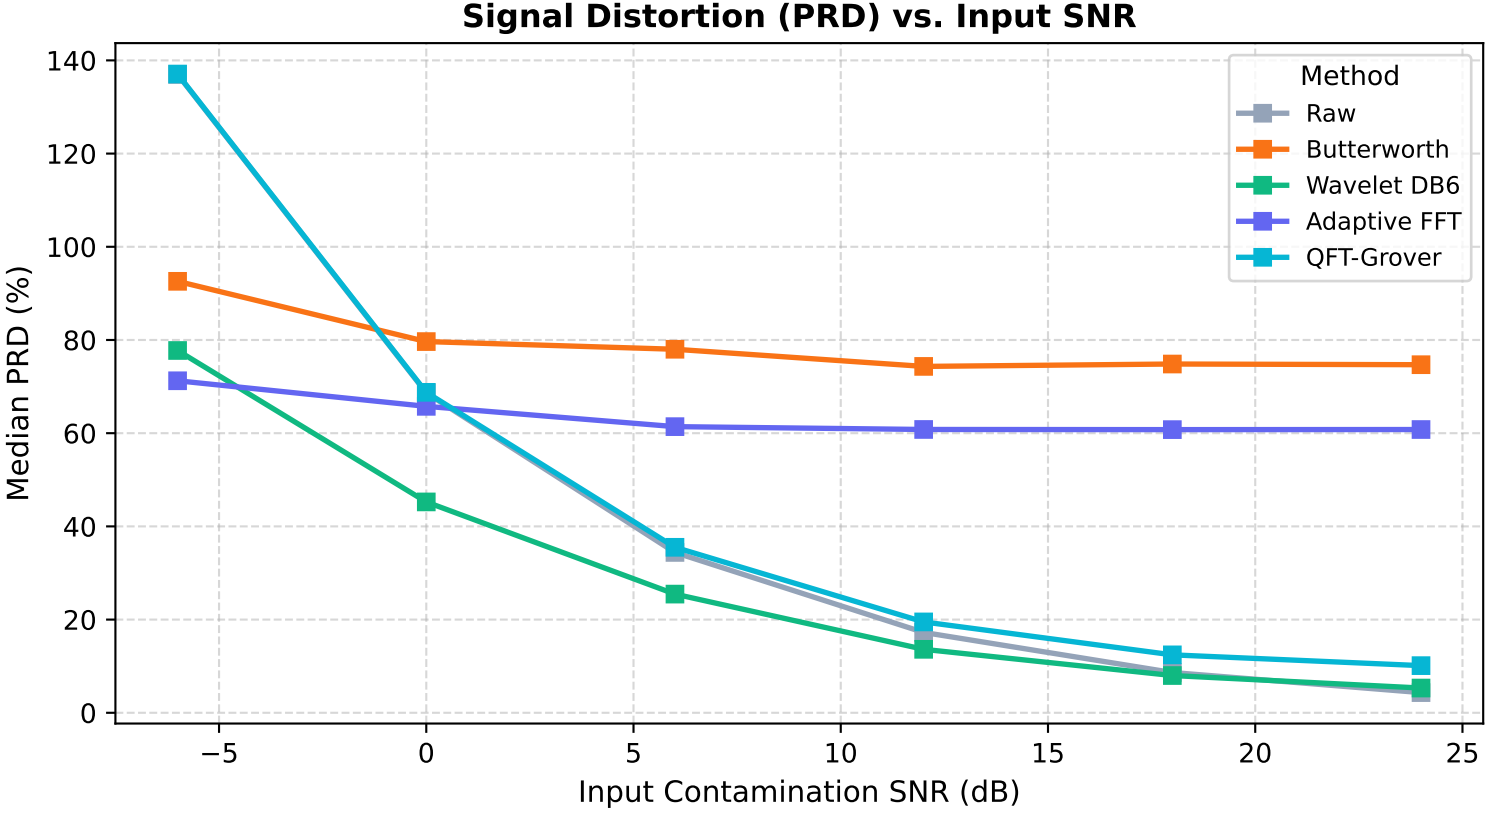
Signal Distortion (PRD) vs. Input SNR
Median PRD (%)
Input Contamination SNR (dB)
Method
Raw
Butterworth
Wavelet DB6
Adaptive FFT
QFT-Grover
0
20
40
60
80
100
120
140
−5
0
5
10
15
20
25