


# What each effective channel gain changes | signed sensitivity

Analytic gain response before final FP32 rounding:  $\partial \text{endpoint} / \partial g_c = P_K C_c$ . Input and physics fixed.  
This is not a derivative with respect to an input pixel or neural weight. Gain probes are illustrative and clipped to admissible bounds.  
Signed response has no universal better direction; endpoint RMS error is lower-is-better.

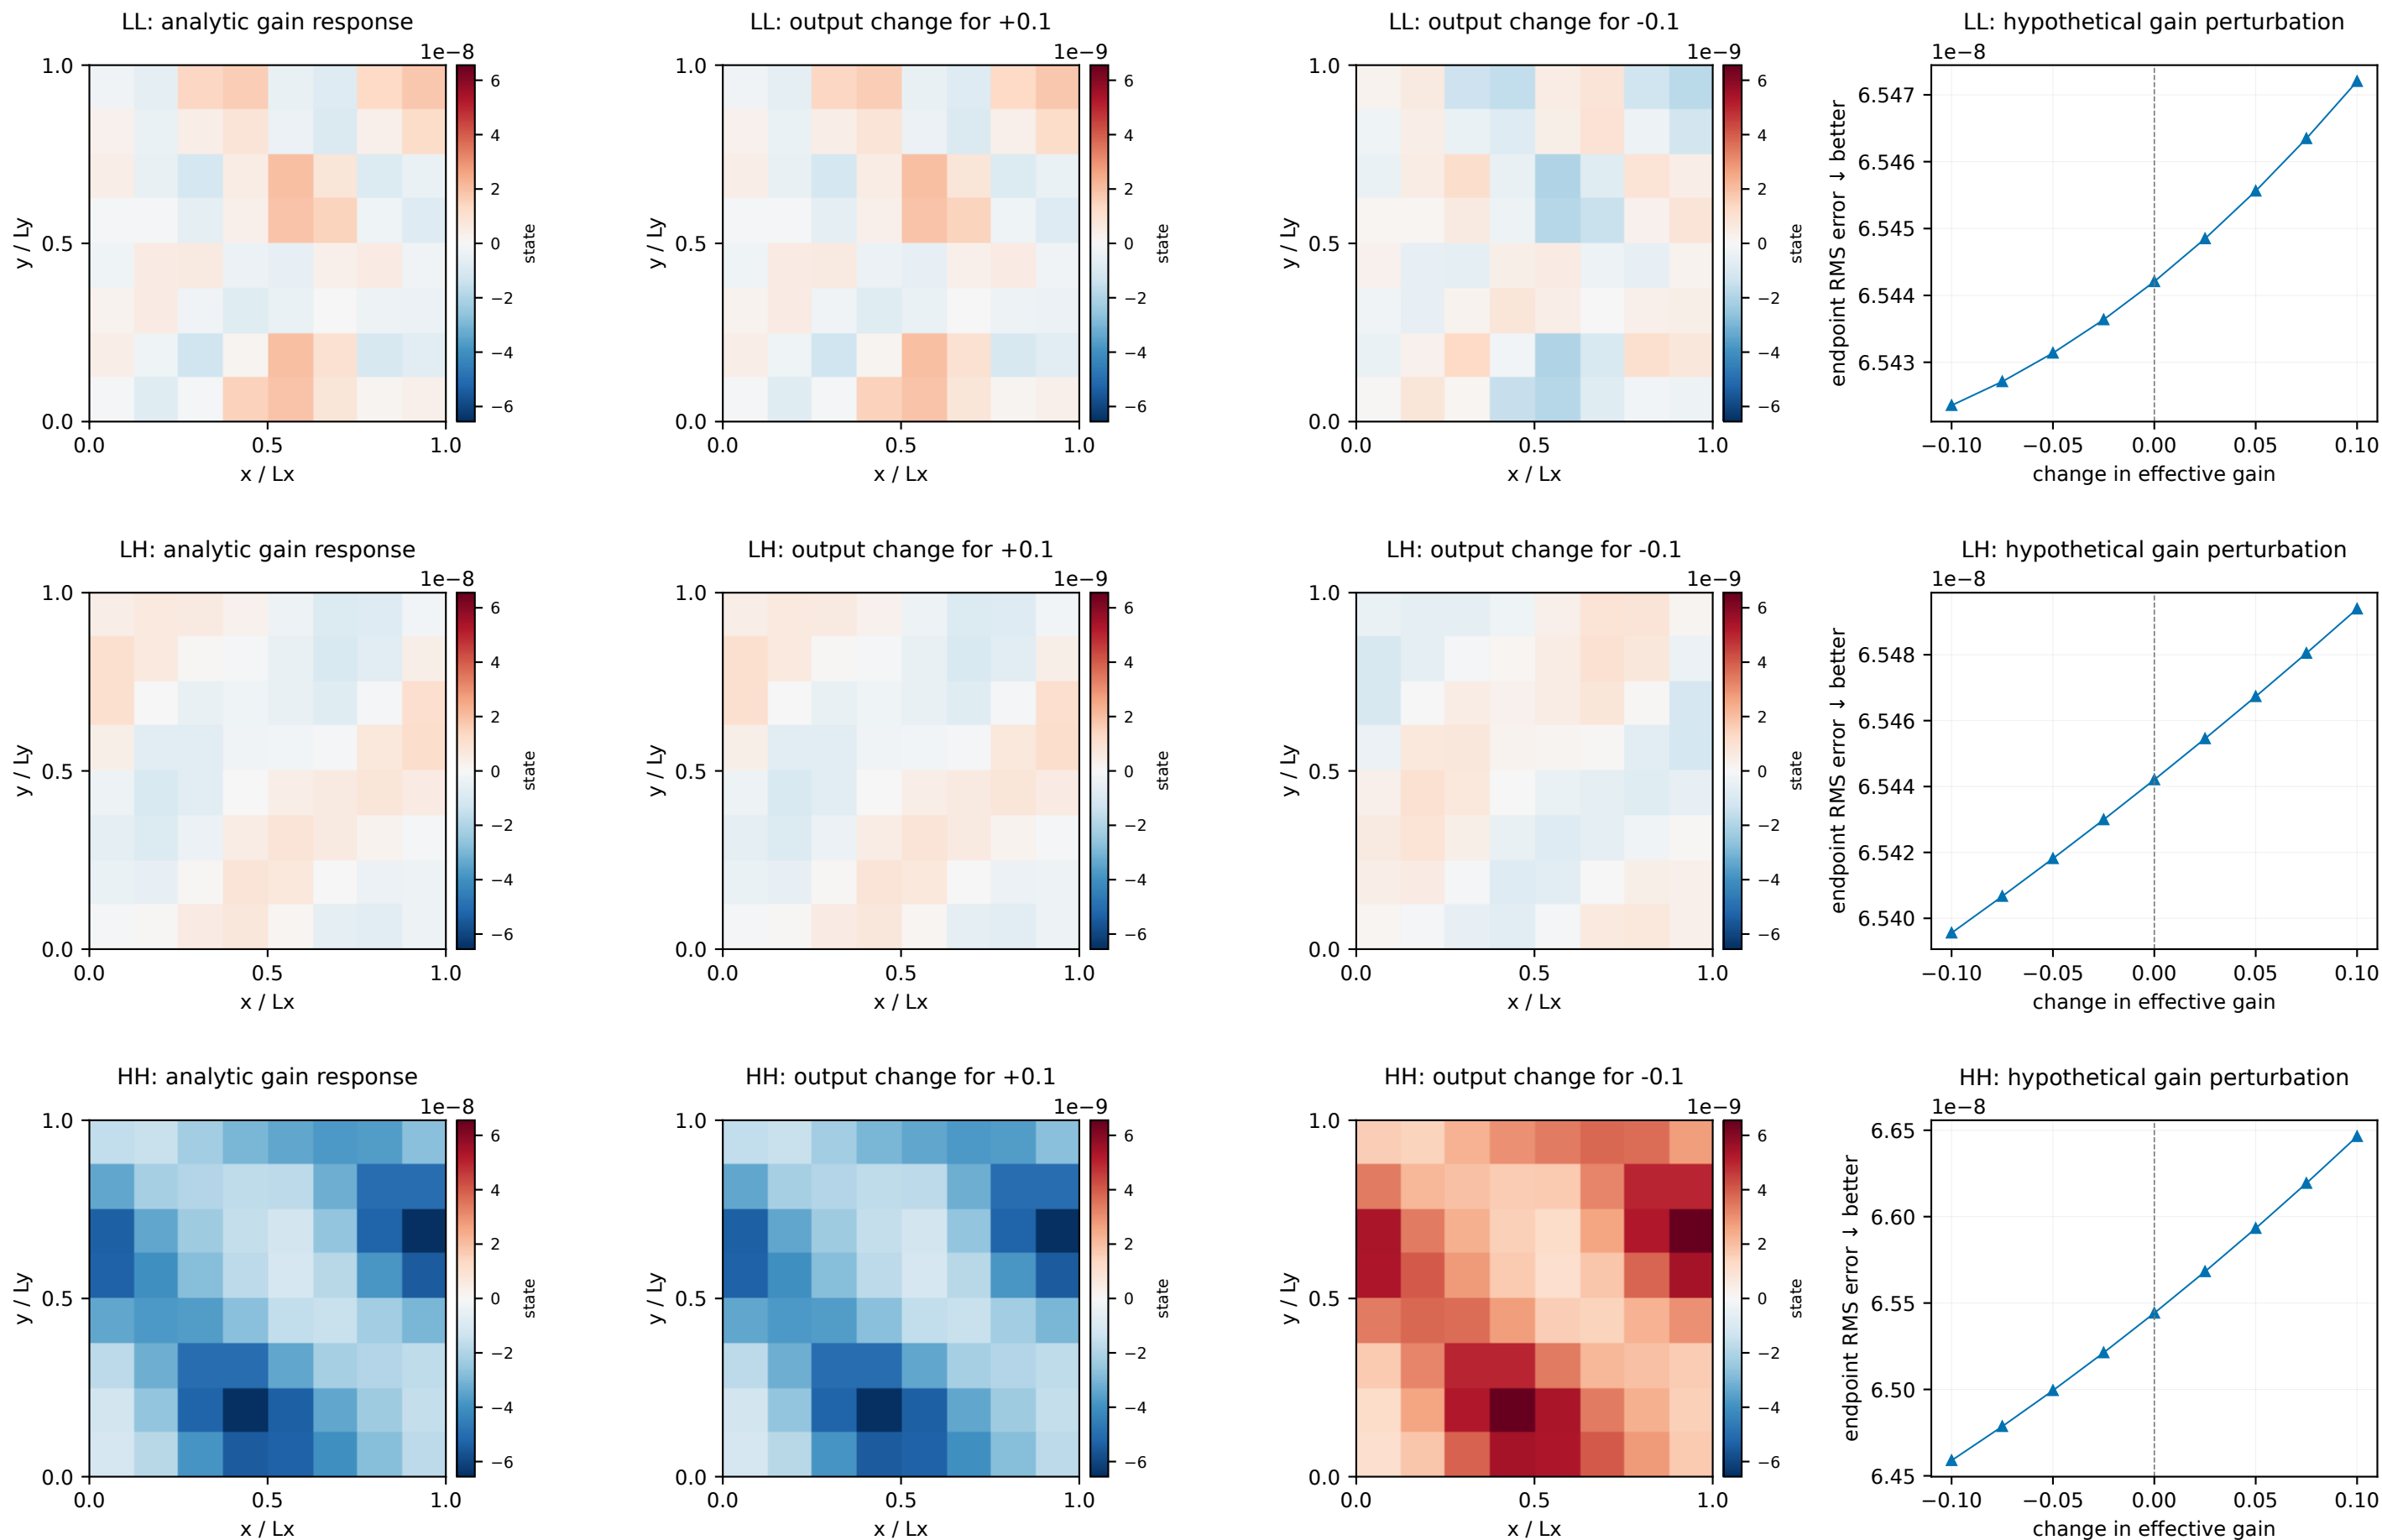

Actual  $8 \times 8$  stored grid; nearest-cell display, no invented spatial detail. FITTED\_CHECKPOINT, selected update 2; smoke source, single-field illustration, not a superiority claim.  
Checkpoint 772d00b470159154 · Parent adjacent/confirmation/71200000 · Reference appears only in evaluation panels. Red/blue means signed value; lower error is better.  
Perturbation curves use FP64 arithmetic around the actual FP32 endpoint; they are explanatory response curves, not new selected checkpoints.