BK-COB P1.25 300×168.75
Data Sheet

Approve	Audit	Formulate
Version: V1.0		
Date: June, 3rd., 2025		

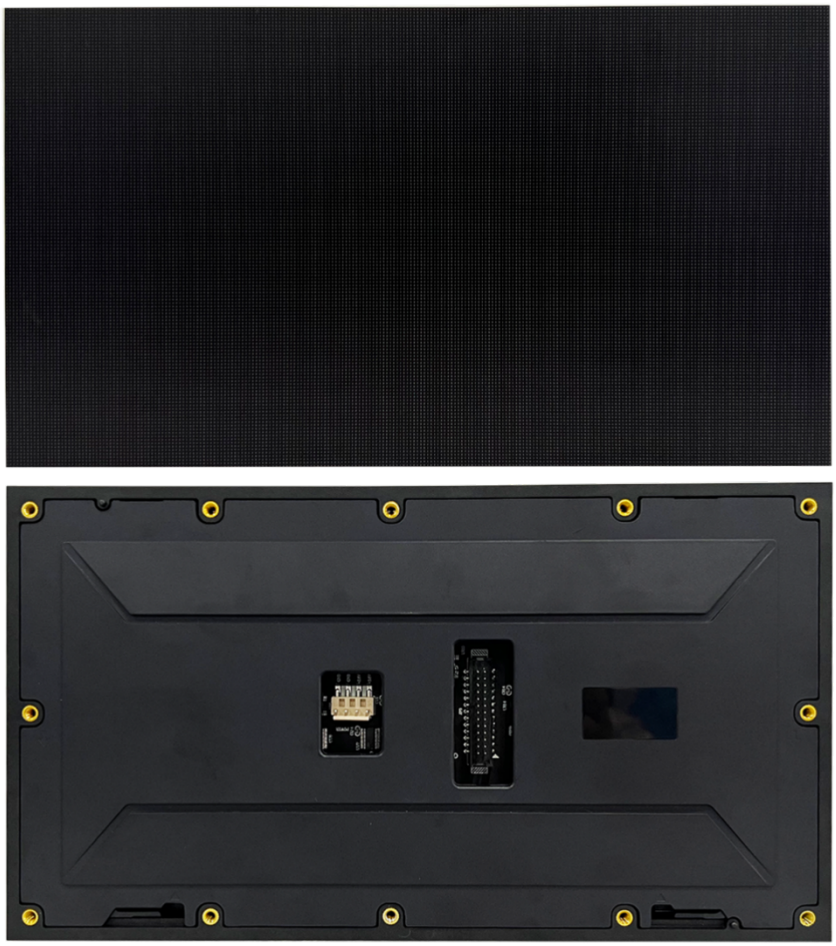

Front and Rear View of the COB Module

Product parameters

LED Parameters	Pixel Composition	COB
	Package Technology	Full flip chip
COB Module Parameters	Pixel Pitch (mm).	1.25
	Module Size (W×H mm).	300*168.75
	Module Resolution (W×H).	240×135
	Scan Method	1/120
	Interface Type	HUB320F
	Surface Craftsmanship	Matte finish
	Surface Hardness	4H
	Module Weight (Kg)	0.48
	Module Thickness(mm)	12.3
	Installation Way	Magnetic, with or without cabinet
Image Parameters	Corrected Maximum Brightness (cd/㎡).	600
	Brightness Uniformity (corrected)	≥97%
	Chromaticity Uniformity (corrected)	± 0.001Cx, within Cy
	Refresh Frequency	3840 Hz
	Adjustable Range of Color Temperature	3000K-15000K (adjustable)
	Horizontal/Vertical Viewing Angle (H/V).	≥175°/175°
	Contrast Ratio	15000:1
Electrical Parameters	Operating Voltage (AC V).	100-240V
	Maximum Power Consumption After Correction (W/㎡).	380
	Average Power Consumption (W/㎡).	110
Control System	Drive Mode	Constant current drive
	Grayscale Level (bit).	14
Use Parameters	Operating Temperature/Humidity Range (°C/RH).	-10°C~+40°C/10%RH~90%RH
	Storage Temperature/Humidity Range (°C/RH).	-20°C~+60°C/10%RH~90%RH
	Application Area	Indoor
	Service Life (hrs).	120,000