SV Series

COB INDOOR FINE PITCH LED MODULE

CRAFTSMANSHIP · A CLASSIC CREATION

Leyard SV Series COB Display adopts full flip-chip LED technology and incorporates a low-power design. Its COB packaging process significantly enhances the display's protection rating, making it dustproof, moisture-resistant, and featuring a 4H surface hardness for easy cleaning. This display series is widely suitable for various applications, including commercial retail and high-end conference settings.

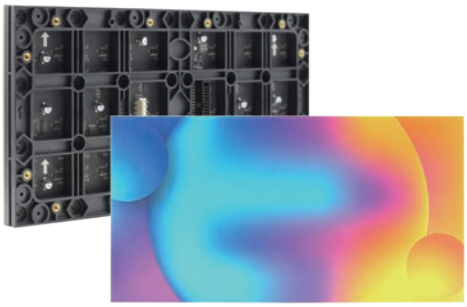

Highlight Features

- Full flip-chip LED chips, eliminating ghosting and "caterpillar effect", with ultralow power consumption
- Matte anti-glare surface with high contrast ratio
- COB design offers 4H hardness, dust/moisture protection, and wipe-clean surface
- Premium PWM-driven IC delivers smooth grayscale transitions, high refresh rates, and vibrant true-to-life color reproduction
- Industry-standard 320x160 module size with universal mounting holes
- Low-power cooling screen Energy-saving

Application Scenarios

Specifications

Item	SV1.2	SV1.5	SV1.8	SV1.2 Virtual Pixel
Pixel Structure	Full Flip-chip COB	Full Flip-chip COB	Full Flip-chip COB	Full Flip-chip COB
Pixel Pitch(mm)	1.25	1.538	1.86	1.25
Module Resolution (W xH)	256x128	208x104	172x86	256x128
Module Dimension (mm) (WxHxD)	320x160x14.3	320x160x14.3	320x160x13.9	320x160x14.3
Module Weight (Kg)	0.5±0.05	0.5±0.05	0.5±0.05	0.5±0.05
Unit Area (m2)	0.0512	0.0512	0.0512	0.0512
Pixel Density (dots/m²)	640000	422,500	288,906	640000
White Balance Brightness (nits)	≥ 550 (after calibration)			≥500 (after calibration)
Color Temperature (K)	9300 adjustable			9300 adjustable
Horizontal Viewing Angle (°)	160			160
Vertical Viewing Angle (°)	160			160
Brightness Uniformity	≥95%			≥95%
Contrast Ratio	≥10000:1			≥10000:1
Single Module Power Consumption (W)	≤19	≤16	≤16	≤18
Power Supply Requirements (V)	DC:4.5	DC:4.5	DC:4.5	DC:4.5
Single Module Current (A)	4.0A	3.6A	3.6A	3.6A
Drive Mode	Constant current drive 64S	Constant current drive 52S	Constant current drive 43S	Constant current drive 64S
Frame Rate (Hz)	60			60
Refresh Rate (Hz)	≥3840			≥3840
Typical Lifespan Value (hours)	100,000			100,000
Working Temperature Range (°C)	-10~40			-10~40
Storage Temperature Range (°C)	-20~60			-20~60
Working Humidity Range (RH)	10~80% without condensation			10~80% without condensation
Storage Humidity Range (RH)	10~85% without condensation			10~85% without condensation

Remark: Above data is subject to change without prior notice.

LEYARD

LEYARD HONG KONG INTERNATIONAL CO., LIMITED
Leyard Southern LED Industrial Park, No.6, Guanhe Rd, Longhua District, Shenzhen, China | intlmarketing@leyard.com | www.leyardhk.com