灰度科技
HUIDU TECHNOLOGY

Product Specification

All-in-one LED Controller

HD-VP210H

V1.2

1. System Overview

HD-VP210H is a three-in-one video processor that integrates traditional video processor, 2-way Gigabit network port output, and U disk playback functions. It not only simplifies the construction of the on-site environment, but also improves the reliability of the product. It supports 5 channels of synchronous signal input and 1 channel of USB input, and can be used in hotels, shopping malls, conference rooms, exhibitions, studios and other occasions that require synchronous playback; in addition, the device also supports point-to-point input/output to allow the LED display to display A clearer picture.

2. Connection Diagram

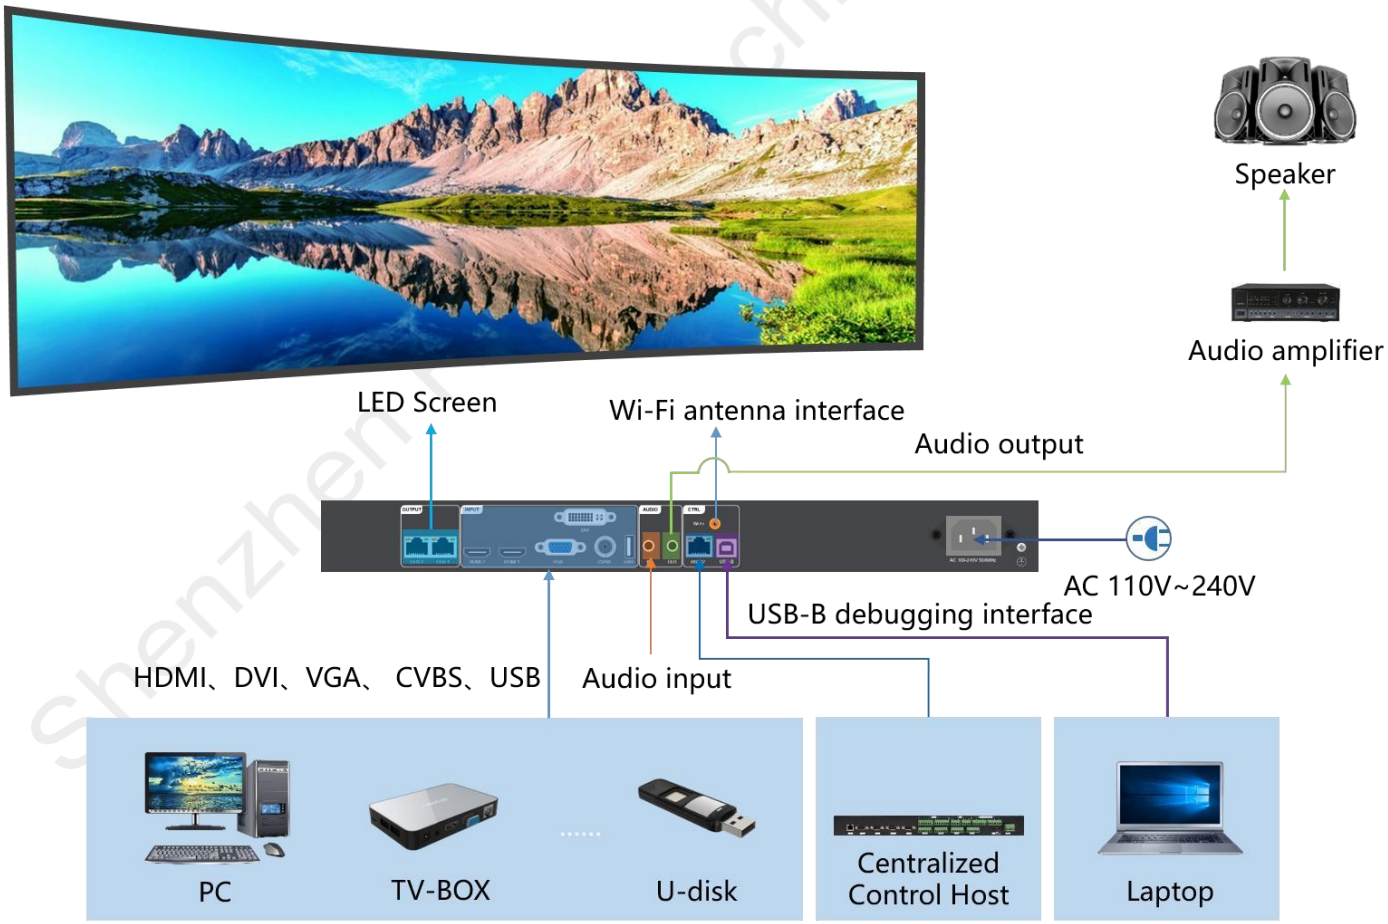

3. Product Characteristics

Input

- Supports 2 channels of HDMI, 1 channel of DVI, 1 channel of VGA, and 1 channel of CVBS signal input, which can be switched at will;
- 1 channel USB input supports direct playback of videos and pictures in various mainstream formats in the root directory of the USB flash drive, and supports up to 1080P high-definition video playback;
- Supports 1 channel TRS 3.5mm standard two-channel audio input and HDMI audio input.

Output

- Comes standard with 2-way Gigabit network ports, which can be directly cascaded to the receiving card;
- The maximum control is 1.3 million pixels, with a maximum horizontal support of 3840 pixels and a maximum vertical support of 2500 pixels;
- 1 channel TRS 3.5mm standard two-channel audio output.

Features

- Support U disk playback, plug and play;
- Support limited conversion and full output;
- Pixel-to-pixel display effect;
- Support non-rectangular load;
- Video signal can be switched, cropped, and scaled at will;
- Support 16 scene presets and calls;
- Support brightness and color temperature adjustment;
- Support RS232 serial port protocol control, docking central control equipment;
- Support Wi-Fi Station mode, AP mode, Wi-Fi station+AP mode;
- Support mobile phone APP wireless control;
- Support infrared remote control (optional).

Shenzhen Huidu Technology Co., Ltd.

4. Appearance Description

Front panel:

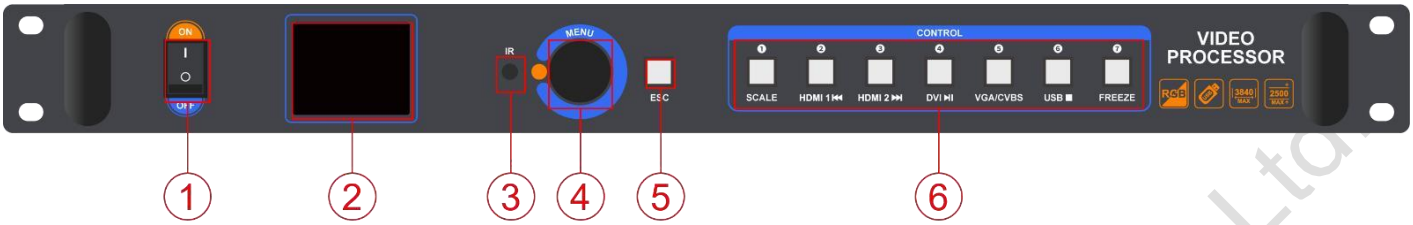

Key Description		
No.	Button	Description
1	Power switch	Controls AC power input
2	LCD display	Debugging displays menus, screen parameters and other information
3	IR	Receive infrared remote control
4	MENU	Press the knob to enter submenu or confirm selection Rotate the knob to select menu items or adjust parameters
5	ESC	Escape key/return key
6	SCALE	Partial/full screen switch button
	HDMI1	Select HDMI signal to play/play the previous U disk program
	HDMI2	Select HDMI signal to play/play the next U disk program
	DVI	Select DVI signal playback/U disk program playback and pause
	VGA/CVBS	Select VGA/CVBS signal playback
	USB	Select to play U disk program/stop playing U disk program
	FREEZE	Freeze with one click
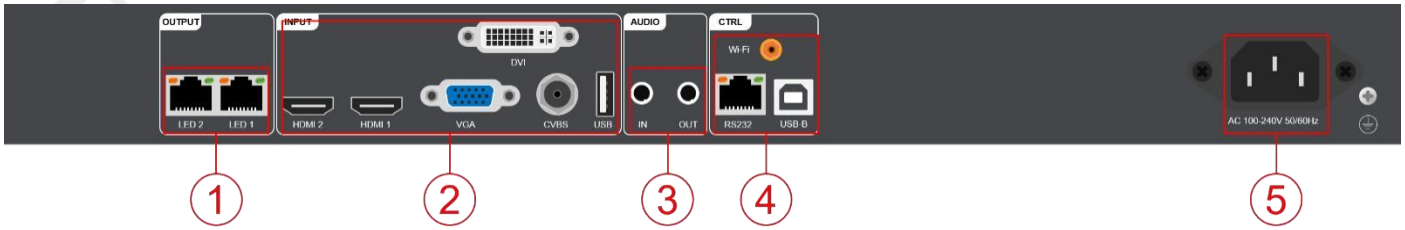
Rear panel: