灰度科技
HUIDU TECHNOLOGY

# PRODUCT SPECIFICATION

All-in-One Video Processor

**HD-VP630**

V2.1

# 1. Overview

HD-VP630 is a new architecture 2-in-1 video processor, which integrates traditional video processor and 6-way Gigabit network port output. Support 4-channel signal interface input, supports arbitrary switching of multiple signals, three windows display, which can be used for hotels, shopping malls, conference rooms, exhibitions, studios and other scenes that need to be played simultaneously. In addition, VP630 equipped with Wi-Fi function, support mobile APP wireless operate.

# 2. Connection Diagram

# 3. Features

**Input**

- Support 2*HDMI, 1*DVI, 1*SDI signal input, and them support switch at will.
- 1 channel TRS 3.5mm audio input and HDMI audio input.

**Output**

- Standard 6-way Gigabit network output, direct cascade receiving card.
- The maximum loading capacity is 3.9 million pixels, the maximum width is 8192 pixels, and the maximum high is 4096 pixels.
- 1 channel TRS 3.5mm audio output.

**Function**

- Equipped with Wi-Fi, support mobile APP wireless operate.
- Support IR wireless control.
- Support brightness setting, Key lock function.
- Preset saving and calling of scenarios, support saving 8 user templates.
- Support RS232 centralized management.
- Three-windows display, Support PIP and POP function.

Shenzhen Huidu Technology Co., Ltd.

# 4. Appearance

**Front panel:**

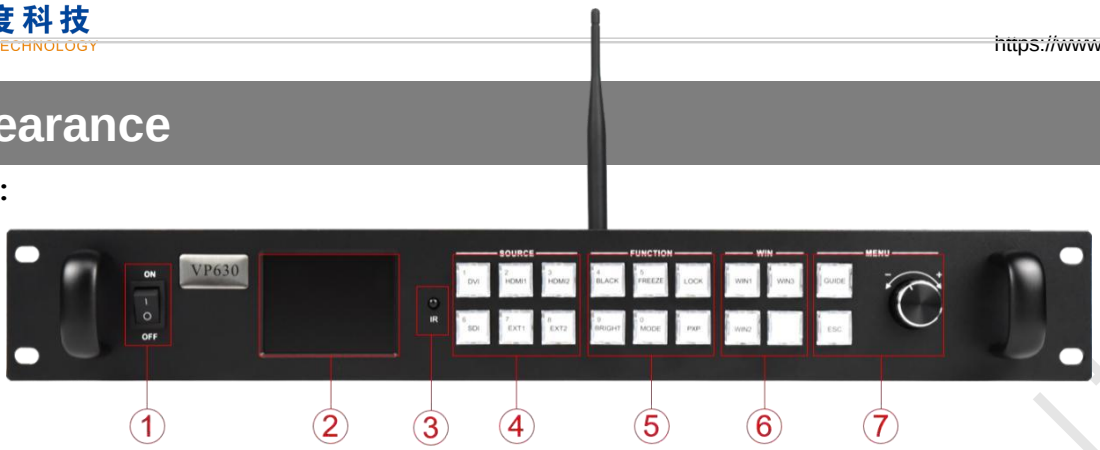


**Rare panel:**

| Key Description | | |
|---|---|---|
| No. | Key | Description |
| 1 | Switch | AC power input switch |
| 2 | LCD screen | Display menu, screen parameters and other information, used for debug device |
| 3 | IR receiver | Switch signal source, brightness setting, volume adjustment and other functions |
| 4 | SOURCE | Input Source Select keypad, 4 input source port selection buttons, corresponding to the input interface identification on the back panel. |
| 4 | FUNCTION | **Function keys,** the key multiplexing function is digital selection, generally used when setting the resolution.<br>**BLACK**: when you press BLACK and its indicator will be on, the output screen will be in a black state.<br>**BRIGHT**: Quickly swap out the shortcut keys of the brightness adjustment menu.<br>**MODE**: Quickly pop up the preset mode call menu.<br>**PXP**: Quickly enter the dual picture layout menu<br>**FREEZE**: Shortcut key for screen freeze.<br>**LOCK**: Quickly lock the keys to prevent miss operation. |
| 5 | WIN | **[WIN1]- [WIN3]** Button: You can press it to add 1~2 window display, and its indicator means the currently selected window. |
| 6 | MENU | Short press the knob [OK] key: it means to enter the main menu or input confirmation.<br>Turn the knob clockwise to increase or the next option, counterclockwise to decrease or the previous option.<br>**GUIDE**: can quickly switch out the "smart navigation" setting interface.<br>Return key<br>**ESC**: means to exit the current operation or option. |

Shenzhen Huidu Technology Co., Ltd.

# 5. Basic Parameters

| Parameters | | Parameter Value |
|---|---|---|
| Chassis specifications | | 1.5U |
| Electrical specifications | power supply | AC 100~240V 50/60Hz |
| | Power consumption | 50W |
| Work Environment | Operating temperature (°C) | -20 ℃ ~ 55 ℃ |
| | Operating humidity (RH) | 20%RH~90%RH (no condensation) |
| Storage environment | Storage temperature (℃) | -20 ℃ ~60 ℃ |
| | Storage humidity (RH) | 10%RH~95%RH (no condensation) |
| Equipment Specifications | size | W×H×D/482mm×65mm×270mm |
| | Net weight | 3.35kg |
| Packing specifications | Packing size | W×H×D/515mm×120mm×370mm |
| | Packing weight | 4.5 kg |
| Packing List | HD-VP630 | 1PCS |
| | Power Cable | 1PCS |
| | USB Cable | 1PCS |
| | HDMI Cable | 1PCS |
| | DVI Cable | 1PCS |
| | Wi-Fi ANT | 1PCS |
| | Certificate | 1PCS |

**Illustrate:**

1. There may be slight differences between the product pictures in the specification and the physical appearance. If you have any questions, please contact the technical support or salesperson for confirmatio

Shenzhen Huidu Technology Co., Ltd.