VX2000 Pro

All-in-One Controller

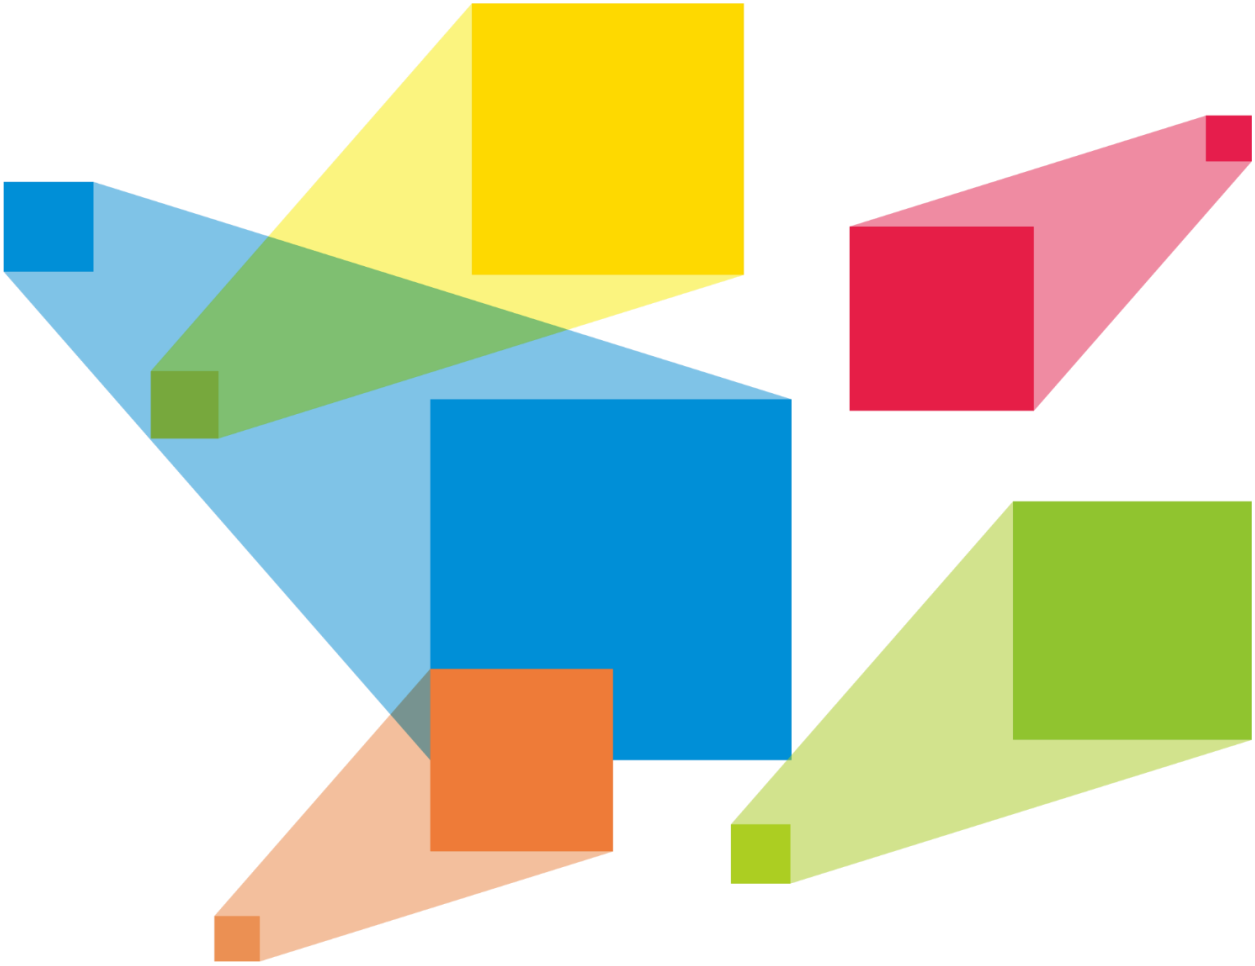

Specificatio

Introduction

The VX2000 Pro is an all-in-one controller combining video processing and video control functionalities into a single device. Equipped with 20 Ethernet ports, it supports three working modes: video controller, fiber converter, and ByPass. Capable of managing up to 13 million pixels, the VX2000 Pro can output at a maximum width of 16,384 pixels and a height of 8,192 pixels, making it perfectly suited for controlling ultra-wide and ultra-high LED screens on-site.

The VX2000 Pro boasts powerful video signal reception and processing capabilities, supporting a maximum resolution of 4K×2K@60Hz for video input. It can handle multiple video signal inputs and includes features like 12 layers, output scaling, low latency and pixel-level brightness and chroma calibration. These functions combine to deliver outstanding image display quality.

Features

Multiple connectors, free input and output

- A comprehensive range of input connectors
  - 1x DP 1.2
  - 2x HDMI 2.0
  - 4x HDMI 1.3
  - 2x 10G optical fiber port (OPT 1 & OPT 2)
  - 1x 12G-SDI (IN & LOOP)
  - 1x USB 3.0 (Play images or videos saved in a USB drive.)
- Output connectors
  - 20x Gigabit Ethernet ports

    A single device supports up to 13 million pixels, delivering a maximum width of 16,384 pixels and a maximum height of 8192 pixels.
  - 4x Fiber outputs

    OPT 1 and OPT 2 send the output on Ethernet ports 1~10 and 11~20 respectively.

    OPT 3 and OPT 4 copy or back up the output on Ethernet ports 1~10 and 11~20 respectively.
  - 1x HDMI 1.3

    For monitoring display. The monitoring image definition supports **Smooth** and **High-Definition**.
  - 1x 3D connector

    Directly connect a third-party 3D emitter.

Appearance

Front Panel

*The picture shown is for illustration purpose only. Actual product may vary due to product enhancement

Rear Panel

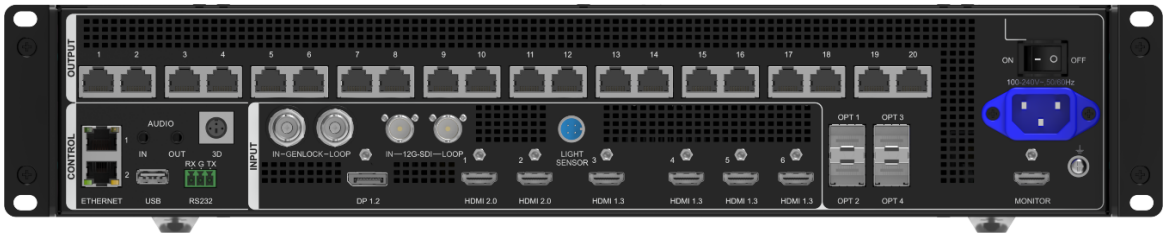

*The picture shown is for illustration purpose only. Actual product may vary due to product enhancement.

Applications:

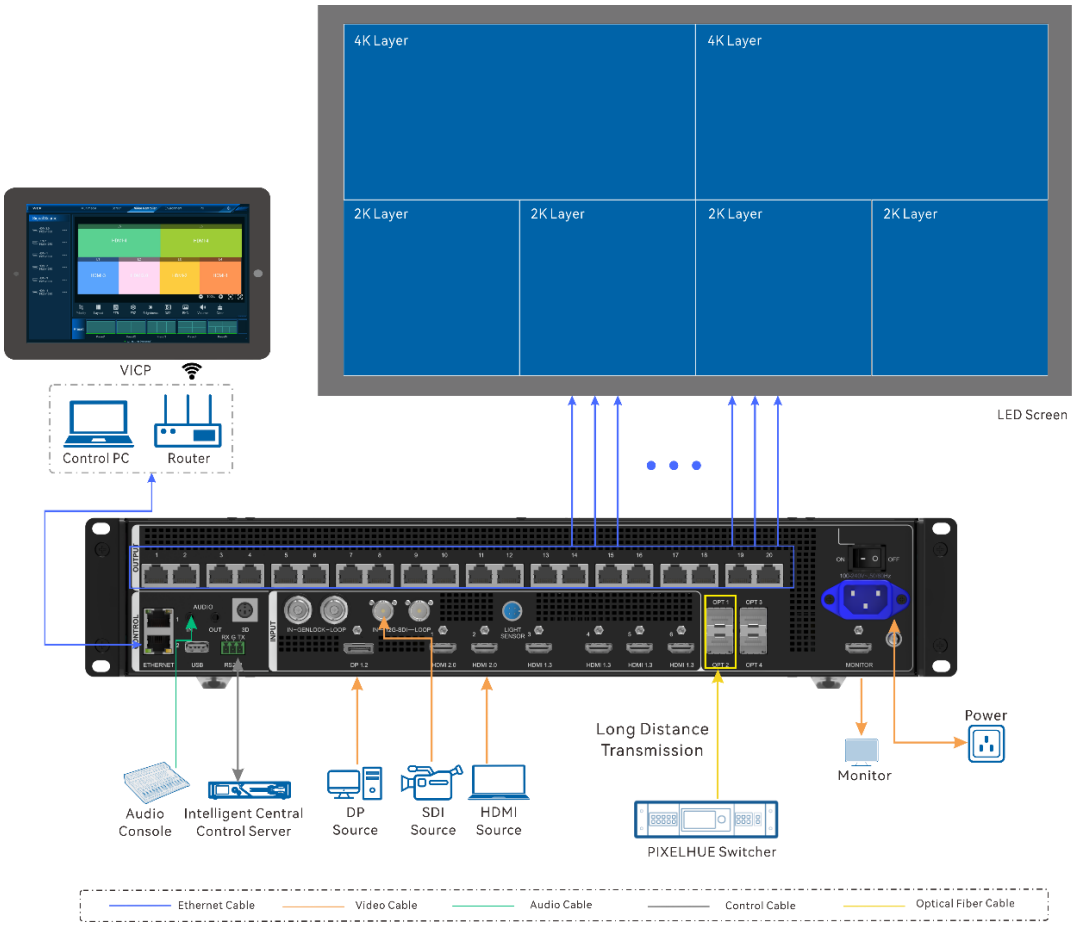

Specifications:

Electrical Parameters	Power connector	100-240V~, 50/60Hz, 2.5A-1.0A
	Rated power consumption	83 W
Operating Environment	Temperature	0°C to 50°C
	Humidity	5% RH to 85% RH, non-condensing
Storage Environment	Temperature	-10°C to +60°C
	Humidity	5% RH to 95% RH, non-condensing
Physical Specifications	Dimensions	482.6 mm × 493.0 mm × 94.6 mm
	Net weight	7.4 kg
	Total weight (packed with paper box)	11.2 kg
	Total weight (packed with flight case)	19.9 kg
Packing Information	Packing box	645 mm × 580 mm × 215 mm
	Flight case	722.4 mm × 547.8 mm × 165.8 mm
	Accessories	1x Power cord, 1x Ethernet cable, 1x HDMI cable, 4x Silicone dustproof plugs, 1x USB cable, 1x Phoenix connector, 1x Quick Start Guide, 1x Certificate of Approval, 1x Safety Manual
Accessories (Optional)	1x Remote control Note Please purchase the remote control as needed. (Item code: M07020005)	
Noise Level (typical at 25°C/77°F)	45 dB (A)	