# DSP400

## All-in-One Controller

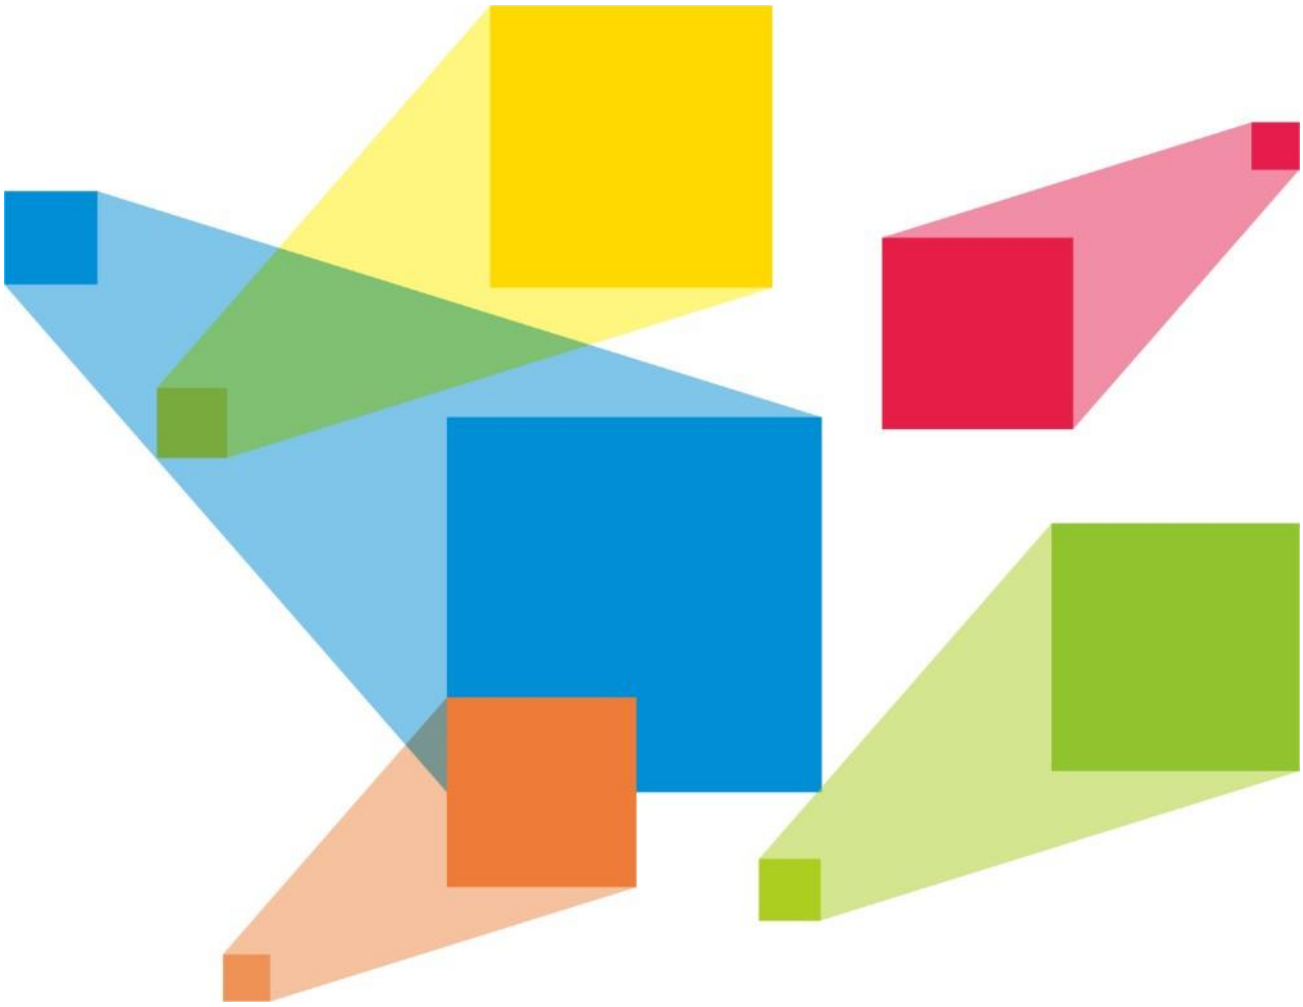

# Specifications

# Introduction

The DSP400 is the new all-in-one controller that integrates video processing and video control into one box. It features 4 Ethernet ports and supports video controller, fiber converter and Bypass working modes. A DSP400 unit can drive up to 2.6 million pixels, with the maximum output width and height up to 10,240 pixels and 8192 pixels respectively, which is ideal for ultra-wide and ultra-high LED screens.

The DSP400 is capable of receiving a variety of video signals and processing high-resolution images. In addition, the device features stepless output scaling, low latency, pixel-level brightness and chroma calibration and more, to present you with an excellent image display experience.

# Features

- Input connectors
  - Ix HDMI 1.3 (IN & LOOP)
  - Ix HDMI 1.3
  - Ix DVI (IN & LOOP)
  - Ix 3G-SDl (IN & LOOP)
  - Ix optical fiber port (OPT1)
- Output connectors
  - 4x Gigabit Ethernet ports

    A single device unit drives up to 2.6 million pixels, with a maximum width of 10,240 pixels and a maximum height of 8192 pixels.
  - 2x Fiber outputs

    OPT 1 copies the output on 4 Ethernet ports.

    OPT 2 copies or backs up the output on 4 Ethernet ports.
  - Ix HDMI 1.3

    For monitoring or video output
- Self-adaptive OPT 1 for either video input or sending card output

  Thanks to the self-adaptive design, OPT 1 can be used as either an input or output connector, depending on its connected device.
- Audio input and output
  - Audio input accompanied with HDMI input source
  - Audio output via a multifunction card
  - Output volume adjustment supported
- Low latency

  Reduce the delay from the input to receiving card to 20 lines when the low latency function and Bypass mode are both enabled.
- 2x layers
  - Adjustable layer size and position
  - Adjustable layer priority
- Output synchronization

  An internal input source can be used as the sync source to ensure the output images of all cascaded units in sync.
- Powerful video processing
  - Based on SuperView Ill image quality processing technologies to provide stepless output scaling
  - One-click full screen display
  - Free input cropping
- Automatic screen brightness adjustment

  Adjust the screen brightness automatically based on the ambient brightness collected by the external light sensor.
- Easy preset saving and loading

  Up to 10 user-defined presets supported
- Multiple kinds of hot backup
  - Backup between devices
  - Backup between Ethernet ports
- All-round color adjustment

  Input source and LED screen color adjustment supported, including brightness, contrast, saturation, hue and Gamma
- Mosaic input source supported
- Pixel level brightness and chroma calibration

  The mosaic source is composed of two sources (2Kx1 K@60Hz) accessed to the OPT 1

  Work with LCT and calibration software to support brightness and chroma calibration on each LED, effectively removing color discrepancies and greatly improving LED display brightness and chroma consistency, allowing for better image quality.
- Up to 4 units cascaded for image mosaic
- Three working modes
  - Video Controller

# Appearance

## Front Panel

## Rear Panel

Note:

Only the main layer can use the mosaic source. When the main layer uses the mosaic source, the PIP layer cannot be opened.

# Applications

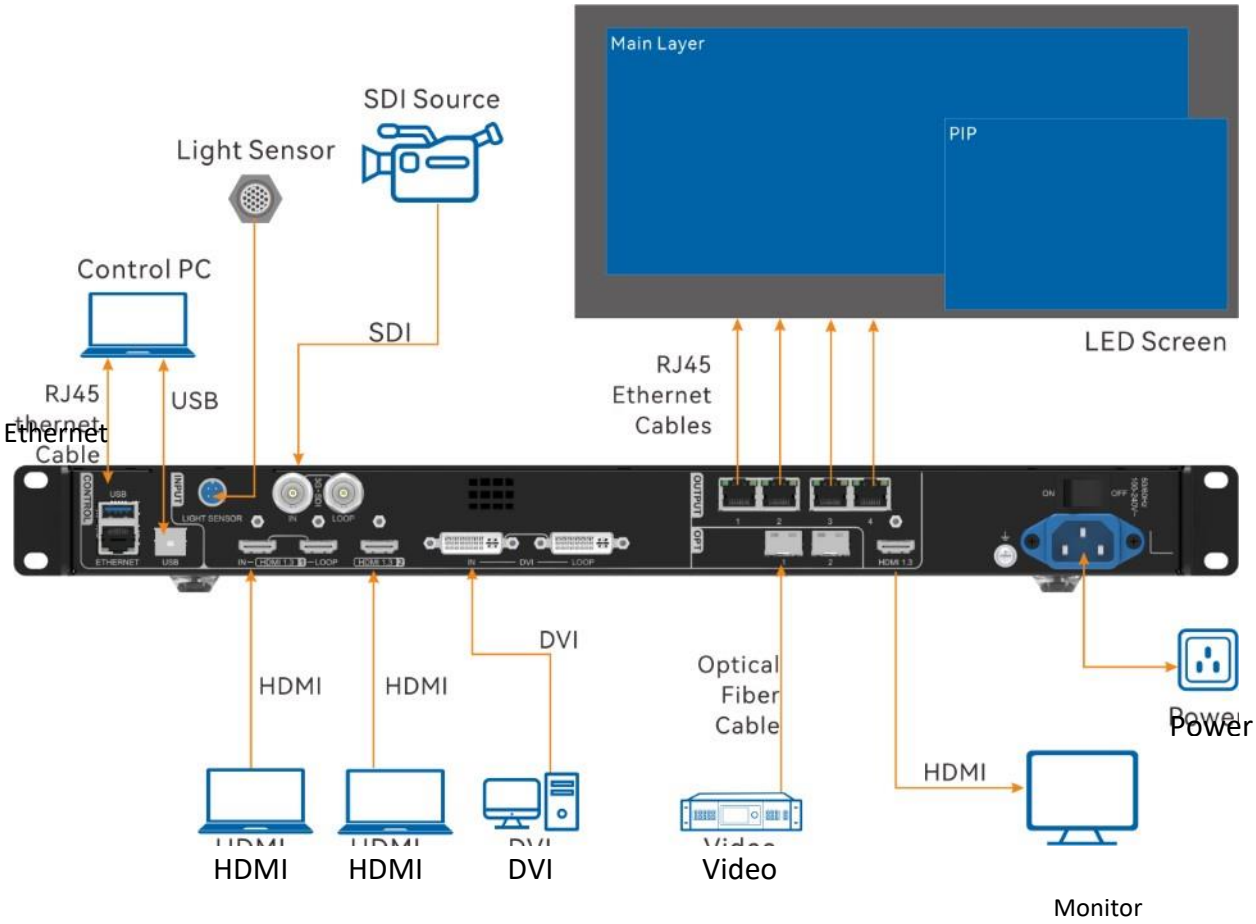

# Specifications

| | | |
|---|---|---|
| Electrical Parameters | Power connector | 100-240V-, 1.5A, 50/60Hz |
| | Rated power consumption | 28 w |
| Operating Environment | Temperature | Ott045C |
| | Humidity | 20% RH to 90% RH, non-condensing |
| Storage Environment | Temperature | -20 c to +70 |
| | Humidity | 10% RH to 95% RH, non-condensing |
| Physical Specifications | Dimensions | 483.6 mm x 301.2 mm x 50.1 mm |
| | Net weight | 4 kg |
| Packing Information | Accessories | Ix Power cord<br>Ix HDMI to DVI cable<br>Ix USB cable<br>Ix Ethernet cable<br>Ix HDMI cable<br>Ix Quick Start Guide<br>Ix Certificate of Approval |
| | Packing size | 550.0 mm x 175.0 mm x 400.0 mm |
| | Gross weight | 6.8 kg |
| Noise Level (typical at 25077 F) | | 45 dB (A) |