

NV3210

Receiving Card



Specifications


Introduction

The NV3210 is a receiving card developed by Xi'an NovaStar Tech Co., Ltd. (hereinafter referred to as NovaStar). Supporting various functions such as Color Management, 18bit+, HDR, Pixel Level Brightness and Chroma Calibration, Quick Adjustment of Dark or Bright Lines, Multi-batch Adjustment, Low Latency, 3D, Individual Gamma Adjustment for RGB, and 90° Image Rotation, the NV3210 can significantly improve the display effect and user experience.

The NV3210 uses 10 standard HUB320F connectors to ensure highly stable communication, supporting up to 40 groups of RGB real pixel data, 40 groups of 3-LED sub-pixel data, or 30 groups of 4-LED sub-pixel data.

- For PWM driver ICs, the maximum load capacity per card is:
 - When used with M3 controllers:
 - 512×512@60Hz (For 8bit video sources)
 - 512×384@60Hz (For 10bit and 12bit video source)

Appearance

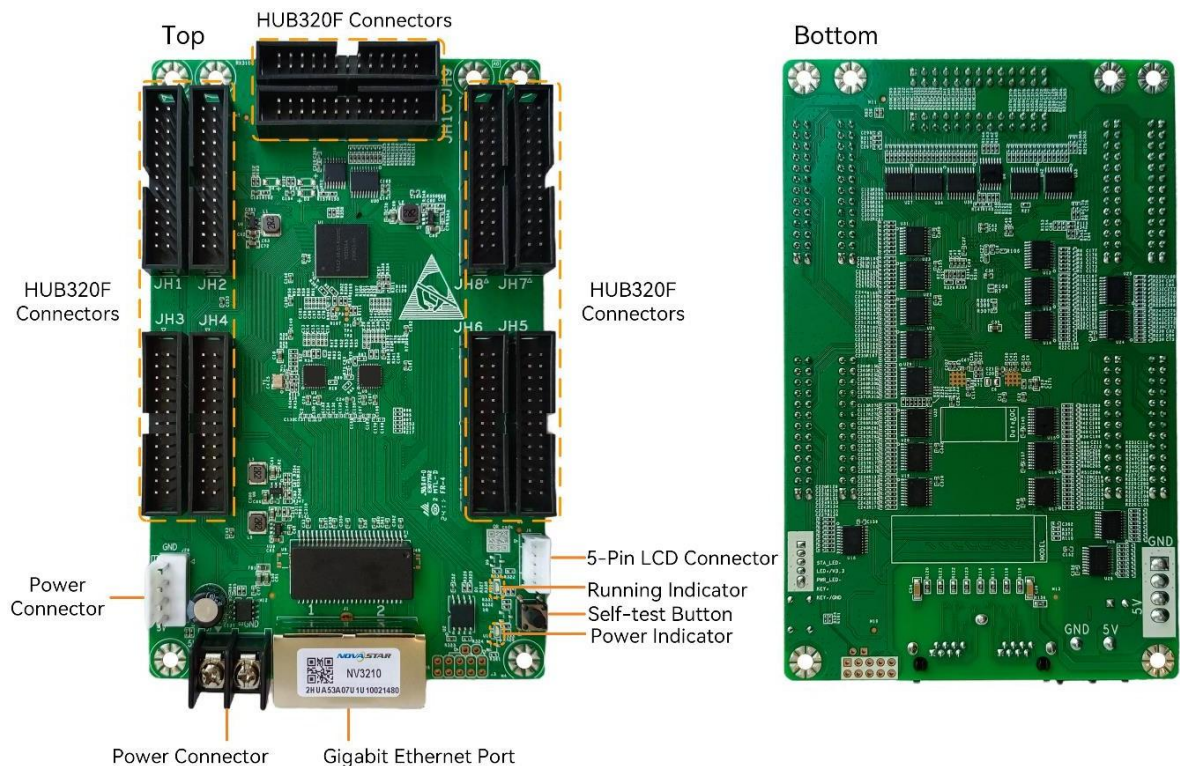

Specifications

Maximum Resolution	- For PWM driver ICs, the maximum load capacity per card is: - When used with M3 controllers: 512×512@60Hz (For 8bit video sources) 512×384@60Hz (For 10bit and 12bit video sources) - When used with COEX controllers: 512×512@60Hz (For 8bit and 10bit video sources) 512×384@60Hz (For 12bit video sources) - For common driver ICs, the maximum load capacity per card is: - When used with M3 controllers: 512×384@60Hz (For 8bit video sources) 256×384@60Hz (For 10bit and 12bit video sources) - When used with COEX controllers: 512×384@60Hz (For 8bit and 10bit video sources) 256×384@60Hz (For 12bit video sources)	
Electrical Parameters	Input voltage	DC 3.8 V to 5.5 V
	Rated current	0.5 A
	Rated power consumption	2.5 W
Operating Environment	Temperature	-20°C to +70°C
	Humidity	10% RH to 90% RH, non-condensing
Storage Environment	Temperature	-25°C to +125°C
	Humidity	0% RH to 95% RH, non-condensing
Physical Specifications	Dimensions	146.0 mm × 91.5 mm × 19.2 mm
	Net weight	99.5 g Note: It is the weight of a single receiving card only.
Packing Information	Packing specifications	An antistatic bag and anti-collision foam are provided for each receiving card. Each packing box contains 100 receiving cards.