A5s Plus

Receiving Card

Top

Power Indicator

Running Indicator

Bottom

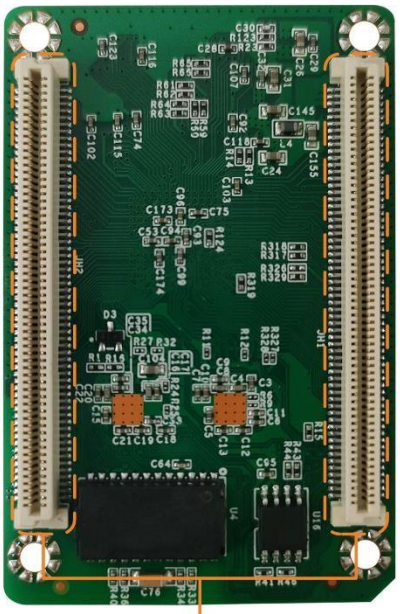

High-Density Connectors

Specifications

Maximum Resolution	• PWM driver IC – 512×384@60Hz (8bit video sources) – 256×384@60Hz (10bit and 12bit video sources) • Common driver IC – 384×384@60Hz (8bit video sources) – 192×384@60Hz (10bit and 12bit video sources)	
Electrical Specifications	Input voltage	DC 3.8 V to 5.5 V
	Rated current	0.6 A
	Rated power consumption	3.0 W
Operating Environment	Temperature	–20°C to +70°C
	Humidity	10% RH to 90% RH, non-condensing
Storage Environment	Temperature	–25°C to +125°C
	Humidity	0% RH to 95% RH, non-condensing
Physical Specifications	Dimensions	70.0 mm × 45.0 mm × 8.3 mm
	Net weight	16.2 g Note: It is the weight of a single receiving card only.
Packing Information	Packing specifications	Each receiving card is packaged in a blister pack. Each packing box contains 80 receiving cards.
	Packing box dimensions	392.0 mm × 200.0 mm × 123.0 mm