DSP600 Pro

All-in-One Controller

Specifications

Introduction

The DSP600 Pro is an all-in-one controller combining video processing and video control functionalities into a single device. Equipped with 6 Ethernet ports, it supports three working modes: video controller, fiber converter, and ByPass. Capable of managing up to 3.9 million pixels, the DSP600 Pro can output at a maximum width of 10,240 pixels and a height of 8,192 pixels, making it perfectly suited for controlling ultra-wide and ultra-high LED screens on-site.

The DSP600 Pro boasts powerful video signal reception and processing capabilities, supporting a maximum resolution of 4K×2K@60Hz for video input. It can handle multiple video signal inputs and includes features like 6 layers, output scaling, low latency and pixel-level brightness and chroma calibration. These functions combine to deliver outstanding image display quality.

Features

Multiple connectors, free input and output

- A comprehensive range of input connectors
  - 1x HDMI 2.0 (IN & LOOP)
  - 2x HDMI 1.3
  - 1x 10G optical fiber port (OPT 1)
  - 1x 3G-SDI (IN & LOOP)
  - 1x USB 3.0 (Play images or videos saved in a USB drive.)
- Output connectors
  - 6x Gigabit Ethernet ports

    A single device supports up to 3.9 million pixels, delivering a maximum width of 10,240 pixels and a maximum height of 8192 pixels.
  - 2x Fiber outputs

    OPT 1 sends the output on Ethernet ports 1~6.

    OPT 2 copies or backs up the output on Ethernet ports 1~6.
  - 1x HDMI 1.3

    For monitoring display.
  - 1x 3D connector

    Directly connect a third-party 3D emitter.
- Self-adaptive OPT 1 for either video input or sending card output

Appearance

Front Panel

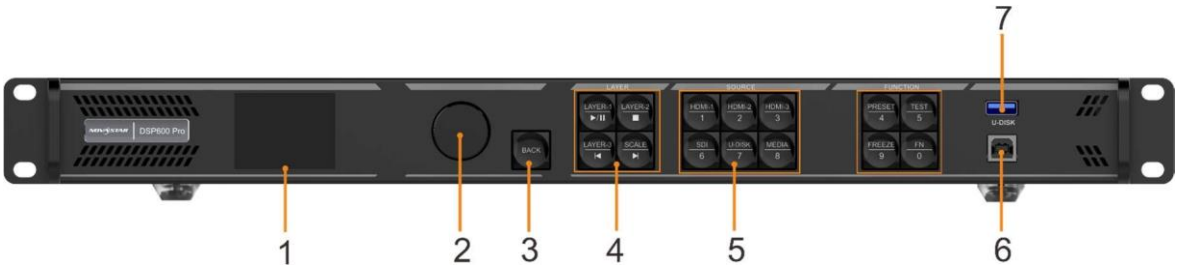

*The picture shown is for illustration purpose only. Actual product may vary due to product enhancement.

Rear Panel

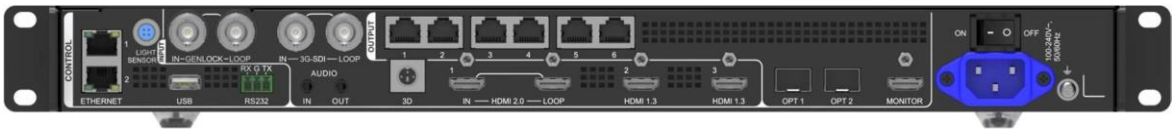

*The picture shown is for illustration purpose only. Actual product may vary due to product enhancement.

Applications

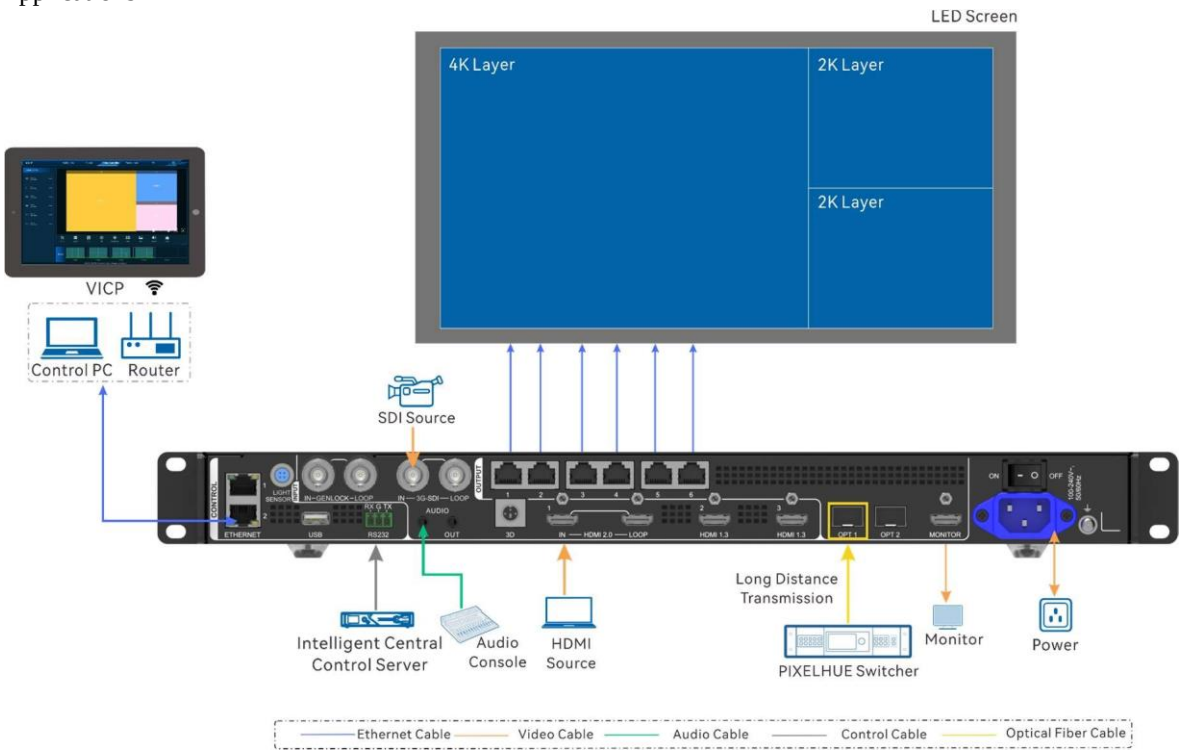

Specifications:

Electrical Parameters	Power connector	100-240V~, 50/60Hz
	Rated power consumption	41 W
Operating Environment	Temperature	0°C to 50°C
	Humidity	5% RH to 85% RH, non-condensing
Storage Environment	Temperature	–10°C to +60°C
	Humidity	5% RH to 95% RH, non-condensing
Physical Specifications	Dimensions	482.6 mm × 302.2 mm × 50.1 mm
	Net weight	3.9 kg
	Total weight	6.5 kg
Packing Information	Carrying Case	545 mm × 425 mm × 145 mm
	Accessories	1x Power cord, 1x Ethernet cable, 1x HDMI cable, 2x Silicone dustproof plugs, 1x USB cable, 1x Phoenix connector, 1x Quick Start Guide, 1x Certificate of Approval
	Packing Box	565 mm × 450 mm × 175 mm
Noise Level (typical at 25°C/77°F)	45 dB (A)	