www.lampro.net

TYPICAL FINE PITCH SOLUTIONS

LAMPRO

Display a better world for all

## Comfortable Viewing Experience

LMini adopts EBL +Technology (Enhance Black Level + ) , uo to display 12000:1 ultra-high-definition picture.

In addition, it adopts HDR high dynamic image display technology and the display Smooth Optical Technology, and it is TUV certificated for low blue light, which greatly increase the viewing comfort.

## Energy Saving Design

LMini's RGB full flip-chip and common cathode design make the maximum power consumption only 300W/SQM, which greatly reduces the use of Energy consumption.

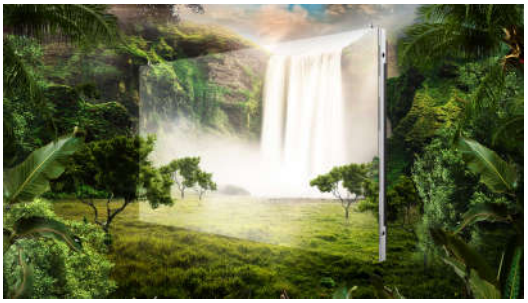

## 9 Strong Protections

LMini's COB packaging technology brings the super strong 9 protections: Anti-Scratch, Anti-Dust,Anti-Moisture,Anti-Collision,Anti-Glare,Anti-Static,Anti-Touch Traces, Anti-Moiré, Front Water-Proof.

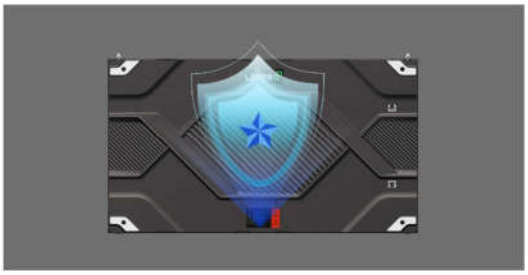

## Ultra Light & Thin Design

LMini is 30% lighter and thinner than traditional cabinets, the thickness of the cabinet is only 29.8mm and the weight is only 4.3Kg.

| Parameter | Value | |
|---|---|---|
| LED Type | Fully flip chip COB | |
| Pixel Pitch （mm） | 1.25 | |
| Pixels Per panel | 480*270 | |
| Pixel density （pixels/㎡） | 640,000 | |
| Panel Size (WxHxD)/ （mm） | 600x337.5x29.8 | |
| Module Size (WxH)/ （mm） | 150x168.75 | |
| Panel Material | Die Casting Aluminum | |
| Panel weight (kg/panel) | 4.3±0.3kg | |
| Module weight (kg/panel) | 0.0865 | |
| Processing Depth(Bit) | 18 | |
| Maintenance | Full Front | |
| Refresh Rate （Hz） | 3840 | |
| Signal Transmission Distance （m） | CAT5 cable: < 100 m;Single mode fiber: < 10 km | |
| Viewing Angle （°） | H170°/V160° | |
| AC Input Voltage （V） | AC: 100V ~ 240V （50~60Hz） | |
| Brightness cd/㎡） | 600 | 800nit |
| Contrast ratio | 10000:1 | 12000:1 |
| AC Input Power Max | 52W/panel 260W/㎡ | 64W/panel 320W/㎡ |
| AC Input Power Ave | 29W/panel 145W/㎡ | 33W/panel 165W/㎡ |
| IP Rating | Front IP65(Module) | |
| Storage Temperature （℃） | -40~60 | |
| Operating Temperature (℃) | -10~45 | |
| Storage Humidity (RH) | 10%~90% non-condensing | |
| Operating Humidity (RH) | 10%~80% non-condensing | |
| LED Life Time （hrs） | 100000 | |
| Panel installation | fix | |
| Certifications | CE/CB/ETL/FCC/EAC/RoHS2.0 | |

## Application

Indoor environments with fixed installation , such as Control Rooms, Conferences,Monitor Rooms, Exhibition Halls and Educations.

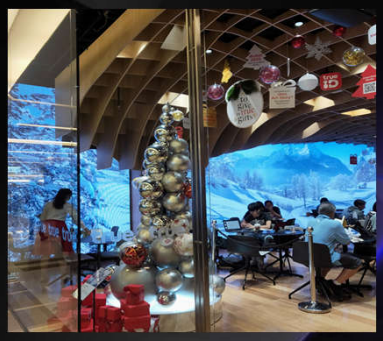

Last updated: 21st October 2024

Techniical specifications are subject to change without prior notice,please check www.lampro.net for the latest information