LUS Series
Indoor LED Display Module

Lightweight, Durable, Vivid, Eco-friendly LED Display

Leyard LUS series is a lightweight and high-strength module with excellent load-bearing capacity. Its optimum design stems from a deep understanding of mechanical principles and the ingenious use of high-strength materials. The screwless design improves overall flatness. The components are directly serviceable. The refresh rate is 3840Hz. In addition, the product supports automatic adjustment of brightness and color temperature, which can bring users good visual experience, while effectively reducing power consumption and contributing to environment protection.

- Adopting High-strength Brackets
  Efficient Load-bearing without Deformation
- Screwless Design
  Ultimate in Ingenuity
- Support Automatic Adjustment of Brightness and Color Temperature
- Dual Module Sizes
  320xl60mm and 320xl80mm
- Thin and Exquisite Design
  Beautiful and Strong
- 3840Hz Refresh Rate
  Creating the Ultimate Visual Experience

High Refresh Rate

LUS series with high refresh rate offers smooth visuals, vibrant colors, and seamless motion for an enhanced viewing experience.

Automatic Adjustment

< Automatic adjustment of brightness and color temperature
< Bringing comfort, realizing power saving

Application Scenarios

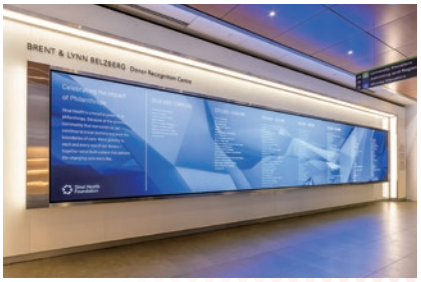

Parameter Item	LUS0100	LUS0125	LUS0153	LUS0186	LUS0200	LUS0250	LUS0300	LUS0400
LED Configuration	SMD / GOB							
Pixel Pitch (mm)	1	1.25	1.538	1.86	2	2.5	3.076	4
Module Resolution (WxH)	320x160	256x128	208x104	172x86	160x80	128x64	104x52	80x40
Module Size (mm) (WxH)	320x160							
Module Weight (Kg)	0.39±0.05	0.39±0.05	0.39±0.05	0.39±0.05	0.38±0.05	0.37±0.05	0.39±0.05	0.39±0.05
Module Area (m^2)	0.0512							
Pixel Density (dots/m^2)	1,000,000	640,000	422500	288,906	250000	160000	105625	62500
White Balance Brightness (nits)	≥500	≥500	≥500	≥500	≥500	430~450 / ≥600	500~550	≥600
Color Temperature (K)	3000~38000 Adjustable							
Horizontal Viewing Angle (°)	160							
Vertical Viewing Angle (°)	140							
Deviation of LED luminance Center	<3%							
Brightness Uniformity	≥97%							
Contrast Ratio	5000:1							
Peak Power Consumption (W/m^2)	≤440	≤440	≤352	≤352	≤352	≤230 / ≤396	≤308	≤370
Avg Power Consumption (W/m^2)	≤148	≤148	≤118	≤118	≤118	≤77 / ≤132	≤103	≤123
Power Supply Requirements (V)	5	5	4	4	4	2.6 / 4.5	3.5	4
Single Module Current (A)	DC:4.5	DC:4.5	DC:4.5	DC:4.5	DC:4.5	DC:4.5	DC:4.5	DC:4.5
Drive Mode (Constant Current Drive)	54S	64S	52S	43S	40S	64S / 32S	52S	20S
Frame Rate (Hz)	50&60							
Refresh Rate (Hz)	≥3840							
Lifetime (hrs)	100,000							
Operation Temperature (℃)	-10~40							
Storage Temperature (℃)	-20~60							
Operation Humidity (RH)	10~80% no condensation							
Storage Humidity (RH)	10~85% no condensation							

Parameter Item	LUS0100 Plus	LUS0125 Plus	LUS0153 Plus	LUS0186 Plus	LUS0200 Plus	LUS0250 Plus
LED Configuration	SMD / GOB					
Pixel Pitch (mm)	1	1.25	1.538/1.551	1.86/1.875	2	2.5
Module Resolution (WxH)	320*180	256*144	208*116	172*96	160*90	128*72
Module Size (mm) (WxH)	320x180					
Module Weight (Kg)	0.5±0.05					
Module Area (m^2)	0.0576					
Pixel Density (dots/m^2)	1000000	640000	418889	286667	250000	160000
White Balance Brightness (nits)	≥500	≥500	≥450	≥450	≥450	500~550
Color Temperature (K)	3000~38000 Adjustable					
Horizontal Viewing Angle (°)	160					
Vertical Viewing Angle (°)	140					
Deviation of LED luminance Center	<3%					
Brightness Uniformity	≥97%					
Contrast Ratio	5000:1					
Peak Power Consumption (W/m^2)	≤438	≤438	≤352	≤352	≤352	≤352
Avg Power Consumption (W/m^2)	≤146	≤146	≤118	≤118	≤118	≤118
Power Supply Requirements (V)	DC:4.5	DC:4.5	DC:4.5	DC:4.5	DC:4.5	DC:4.5
Single Module Current (A)	5.6	5.6	4.5	4.5	4.5	4.5
Drive Mode (Constant Current Drive)	60S	64S	58S	48S	45S	36S/64S
Frame Rate (Hz)	50&60					
Refresh Rate (Hz)	≥3840					
Lifetime (hrs)	100000					
Operation Temperature (℃)	-10~40					
Storage Temperature (℃)	-20~60					
Operation Humidity (RH)	10~80% no condensation					
Storage Humidity (RH)	10~85% no condensation					

Remark: The product parameters, descriptions and images are subjest to change without prior notice.

LEYARD

LEYARD HONG KONG INTERNATIONAL CO., LIMITED

Leyard Southern LED Industrial Park, No.6, Guanhe Rd, Longhua District, Shenzhen, China | intlmarketing@leyard.com | www.leyardhk.com