LEYARD

Full Flip Chip COB VDS Series

INDOOR FINE PITCH ***FULL FLIP CHIP COB*** LED DISPLAY

- *High contrast ratio*
- *Wide viewing angle*
- *Ultra thin*
- *Quick installation*
- *Integration*
- *High refresh*

VDS SERIES
HIGHLIGHT FEATURES

90°angle splicing, the hidden line of the corner is only the thickness of the PCB.Minimum square column side length 600MM

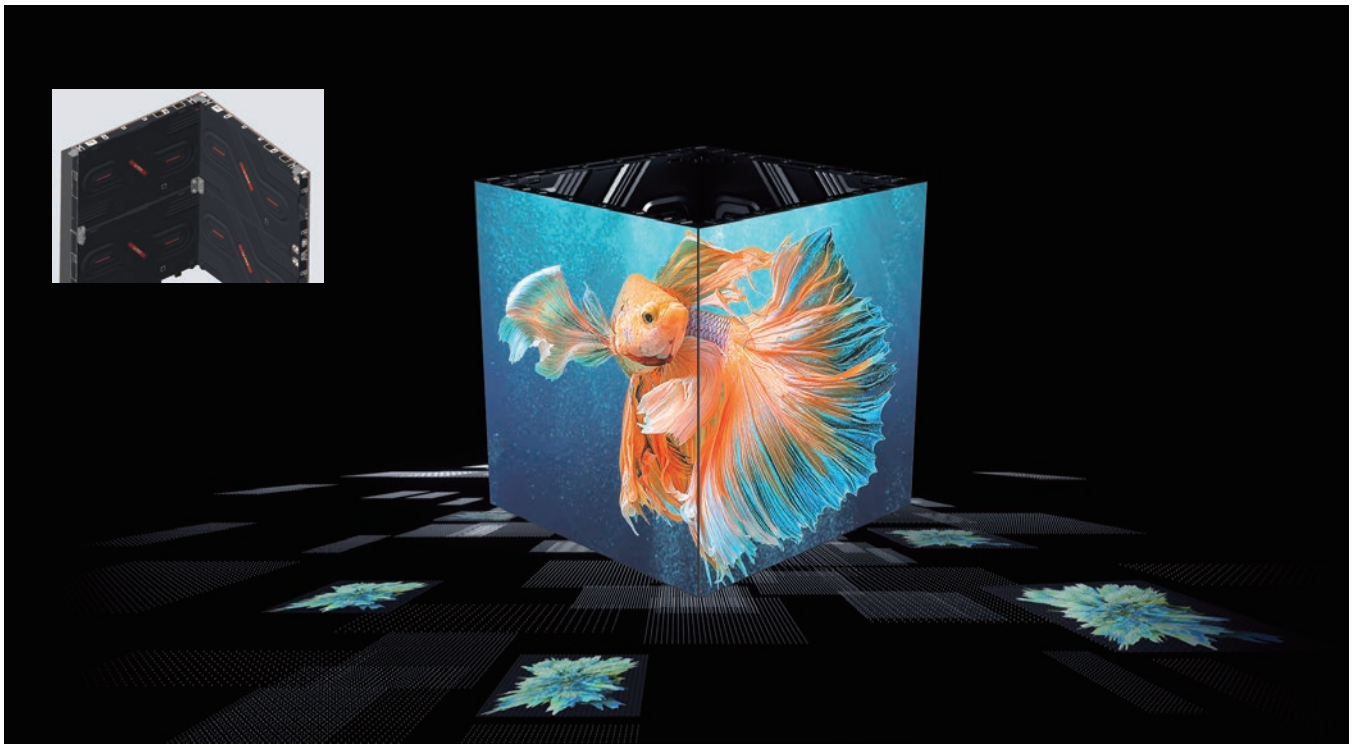

3840Hz ultra-high refresh rate, intelligent module playing video smoothly.

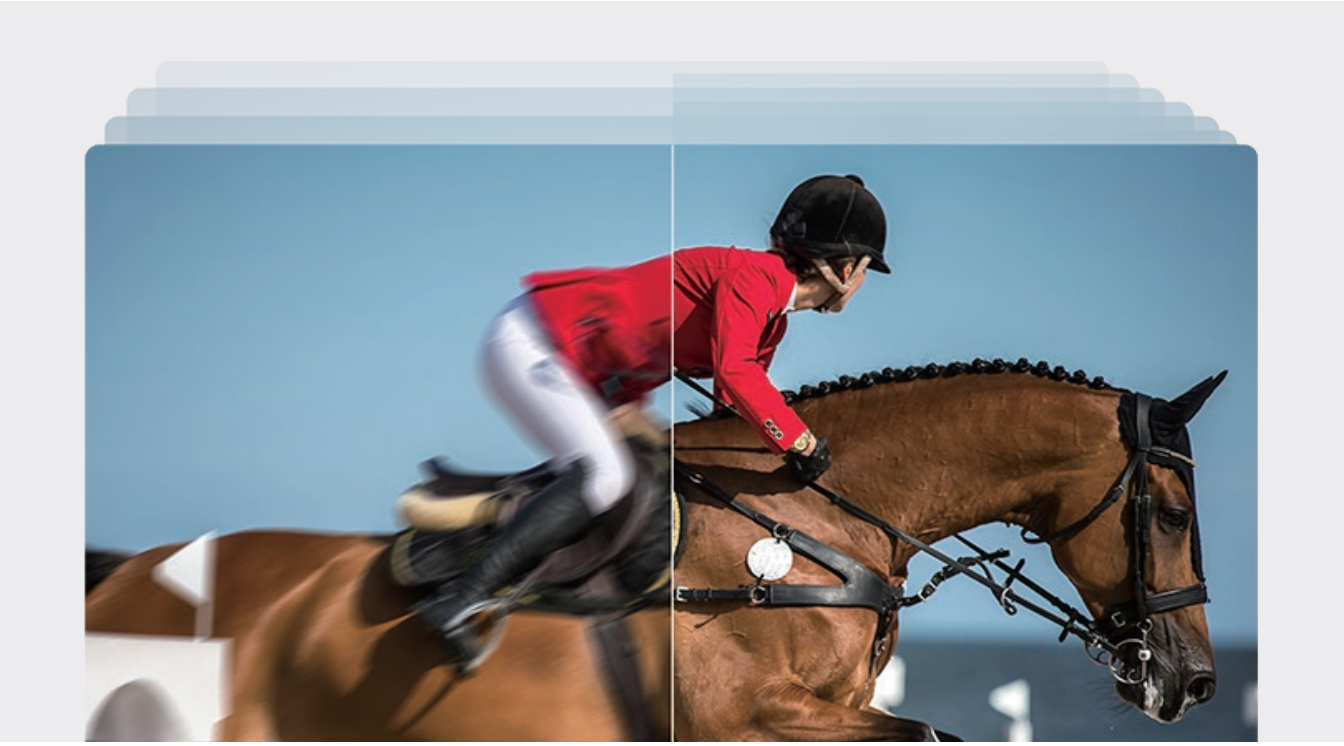

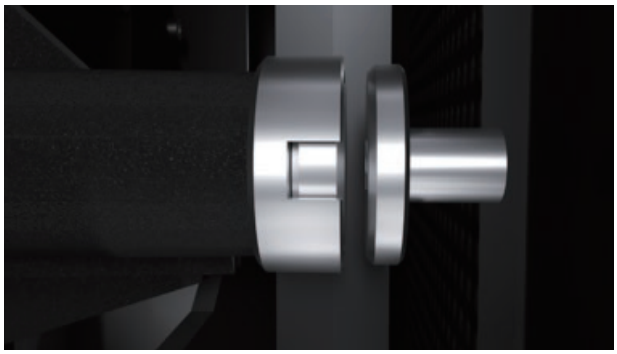

LED Modules with magnetic design for excellent flatness and seamless splicing of the whole screen.

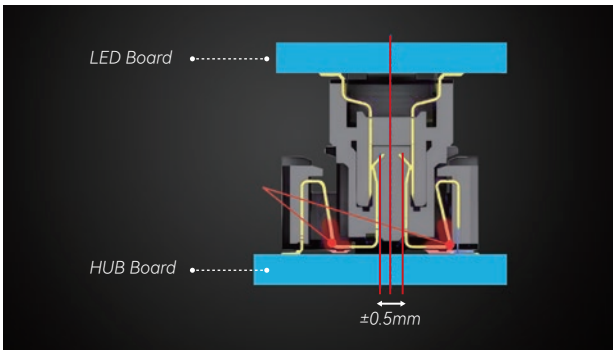

Floating Connector - Good SMD position tolerance and shock resistance, reduce the stress on the welding foot when the dislocation is inserted and removed.

Ultra high protection,anti-static, anti-collision.

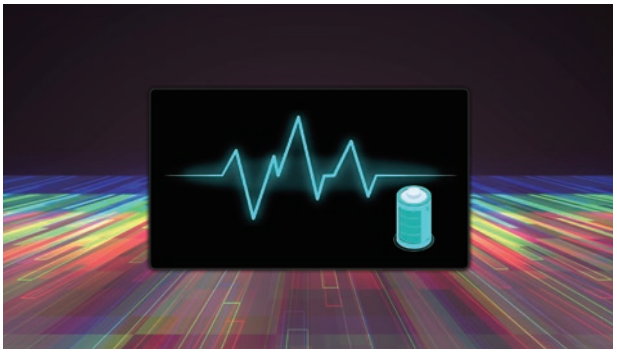

One-key energy saving, black screen saves 90% at least.

PRODUCT STRUCTURE

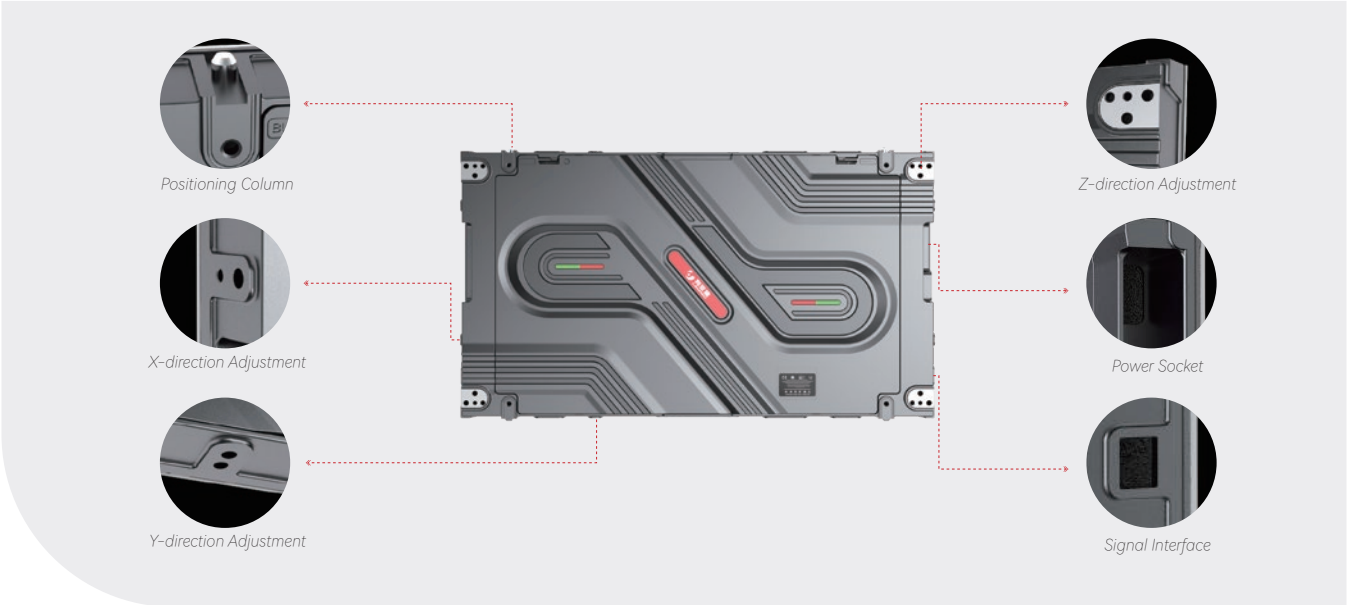

SPECIFICATIONS

Item	VDS007	VDS009	VDS012	VDS015
Pixel Configuration	Full Flip Chip COB	Full Flip Chip COB	Full Flip Chip COB	Full Flip Chip COB
Pitch (mm)	0.78	0.935	1.25	1.56
Module Resolution (WxH)	192x216	160x180	120x135	96x108
Module Size (mm)(WxHxD)	150x168.75	150x168.75	150x168.75	150x168.75
Module Composition (WxH)	4x2	4x2	4x2	4x2
Cabinet Resolution (WxH)	768x432	640x360	480x270	384x216
Cabinet Size (mm)(WxHxD)	600x337.5x43.5	600x337.5x43.5	600x337.5x43.5	600x337.5x43.5
Unit Area (m^2)	0.2025	0.2025	0.2025	0.2025
Cabinet Weight (kg/m^2)	25	25	25	25
Pixel Density (pixel/m^2)	1638400	1137777	640000	409600
Surface Flatness (mm)	≤0.1	≤0.1	≤0.1	≤0.1
Brightness Calibration	Yes	Yes	Yes	Yes
Color Calibration	Yes	Yes	Yes	Yes
Brightness (nits)	600 (1000 optional)	600 (1000 optional)	600 (1000 optional)	600 (1000 optional)
Color Temperature (K)	3000—10000 Adjustable			
Horizontal Viewing Angle (°)	170	170	170	170
Vertical Viewing Angle (°)	170	170	170	170
Deviation of LED Luminance Center	<3%	<3%	<3%	<3%
Brightness Uniformity	≥97%	≥97%	≥97%	≥97%
Chromaticity Uniformity	±0.003Cx,Cy within			
Contrast Ratio	10000:1 & 20000:1			
Max Power Consumption (W/m^2)	425 & 550	375 & 530	325 & 510	325 & 510
Average Power Consumption (W/m^2)	200 & 280	175 & 265	160 & 260	160 & 260
Power Supply	AC100~240V (50/60Hz)			
Drive Mode	Common cathode constant current driver			
Frame Rate (Hz)	50&60	50&60	50&60	50&60
Refresh Rate (Hz)	3840	3840	3840	3840
Lifetime (hrs)	100,000	100,000	100,000	100,000
IP Level	IP54 / 4H	IP54 / 4H	IP54 / 4H	IP54 / 4H
Operation Temperature (℃)	-10 ~ 40	-10 ~ 40	-10 ~ 40	-10 ~ 40
Storage Temperature (℃)	-20 ~ 60	-20 ~ 60	-20 ~ 60	-20 ~ 60
Operation Humidity (RH)	10~90% no condensation			
Storage Humidity (RH)	10~95% no condensation			

Remark: Above data is subject to change without prior notice

LEYARD

LEYARD HONG KONG INTERNATIONAL CO., LIMITED
Leyard Industrial Park, No.6 Guanhe Road, Junzibu Community, Guanlan Street, Longhua District, Shenzhen, Guangdong, China
Email: intlmarketing@leyard.com | Website: www.leyardhk.com